PQxxxENAHZPH Series

Low Voltage Operation,Compact Surface
Mount type Low Power-Loss Voltage Regulators

■ Features

1.Low voltage operation
(Minimum operating voltage: 2.35V)
2.Output current : 1.5A
3.Low dissipation current
(Dissipation current at no load: MAX. 2mA
Output OFF-state dissipation current: MAX.5μA)
4.Compliant Ceramic capacitors
5.Built-in ON/OFF function
6.Built-in overcurrent and overheat protection functions
7.Correspond to flow soldering
8.RoHS directive compliant

■ Applications


1.Personal computers and peripheral equipment
2.Power supplies for various digital electronic equipment such as DVD player or STB

■ Model Line-up

Output Voltage (TYP.)	Model No.
1.5V	**PQ015ENAHZPH**
1.8V	**PQ018ENAHZPH**
2.5V	**PQ025ENAHZPH**
3.3V	**PQ033ENAHZPH**

■ Outline Dimensions

(Unit : mm)

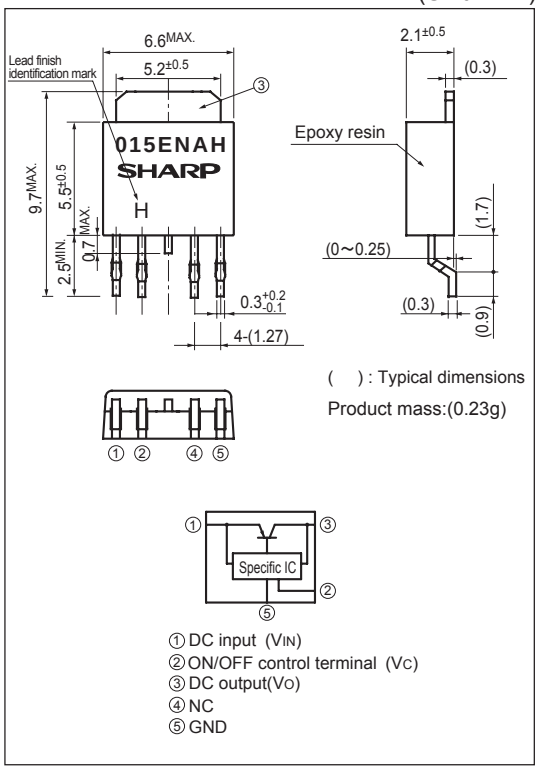

Lead finish:Lead-free solder plating
(Composition: Sn2Cu)

■ Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Rating	Unit
*1 Input voltage	V_{IN}	10	V
*1 Output control voltage	V_C	10	V
Output current	I_O	1.5	A
*2 Power dissipation	P_d	8	W
*3 Junction temperature	T_j	150	°C
Operating temperature	T_{opr}	-40 to +85	°C
Storage temperature	T_{stg}	-40 to +150	°C
Soldering temperature	T_{sol}	260(10s)	°C

*1 All are open except GND and applicable terminals.
*2 Pd:With infinite heat sink
*3 There is case that over heat protection operates at the temperature Tj:125°C to 150°C, so this item cannot be used in this temperature range.

Notice The content of data sheet is subject to change without prior notice.
In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

■ Electrical Characteristics

Unless otherwise specified,condition shall be V_{IN}=V_O(TYP.)+1V,I_O=0.5A,V_C=2.7V,Ta=25°C

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input voltage	V_{IN}	-	Refer to the following table.1			V
Output voltage	V_O	-	Refer to the following table.2			V
Load regulation	RegL	I_O=5mA to 1.5A,V_{IN}=V_O+1.5V	-	0.5	2.0	%
Line regulation	RegI	V_{IN}=V_O(TYP.)+1V to V_O(TYP.)+6V , I_O=5mA	-	0.2	1.0	%
Temperature coefficient of output voltage	T_CV_O	Tj=0 to +125°C, I_O=5mA	-	±0.01	-	%/°C
Ripple rejection	RR	Refer to Fig.3	-	60	-	dB
※4 Dropout voltage	V_{I-O}	I_O=1.2A※5	-	-	0.9	V
※6 ON-state voltage for control	$V_{C(ON)}$	-	2.0	-	-	V
ON-state current for control	$I_{C(ON)}$	-	-	-	200	µA
OFF-state voltage for control	$V_{C(OFF)}$	-	-	-	0.6	V
OFF-state current for control	$I_{C(OFF)}$	V_C=0.4V	-	-	5	µA
Quiescent current	I_q	I_O=0A	-	1	2	mA
Output OFF-state dissipation current	I_{qs}	I_O=0A, V_C=0.4V	-	-	5	µA

※4 Applied to **PQ033ENAHZPH**
※5 Input voltage shall be the value when output voltage is 95% in comparison with the initial value.
※6 In case of opening control terminal ②, output voltage turns off

Table.1 Input Voltage range

Unless otherwise specified,condition shall be I_O=0.5A,V_C=2.7V,Ta=25°C

Model No.	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
PQ015ENAHZPH	V_{IN}	-	2.35	-	10	V
PQ018ENAHZPH	V_{IN}	-	2.35	-	10	V
PQ025ENAHZPH	V_{IN}	-	3.0	-	10	V
PQ033ENAHZPH	V_{IN}	-	3.8	-	10	V

Table.2 Output Voltage

Unless otherwise specified,condition shall be V_{IN}=V_O(TYP.)+1V,I_O=0.5A,V_C=2.7V,Ta=25°C

Model No.	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
PQ015ENAHZPH	V_O	-	1.47	1.5	1.53	V
PQ018ENAHZPH	V_O	-	1.764	1.8	1.836	V
PQ025ENAHZPH	V_O	-	2.45	2.5	2.55	V
PQ033ENAHZPH	V_O	-	3.234	3.3	3.366	V

Fig.1 Typical Application

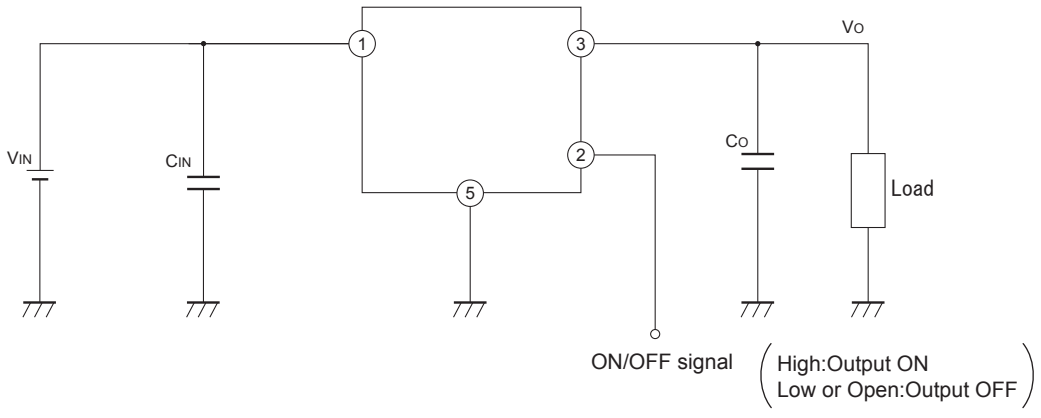


Fig.2 Test Circuit



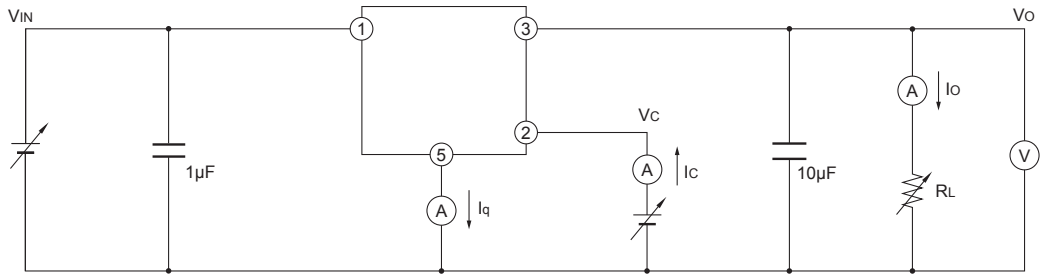


Fig.3 Test Circuit for Ripple Rejection

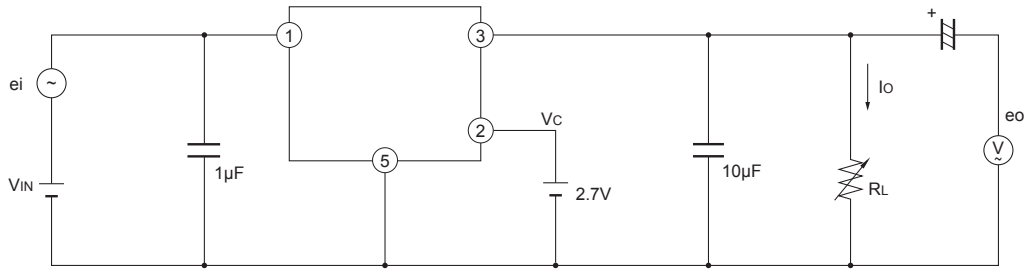

f=120Hz(sine wave)
ei(rms)=0.5V
VIN=VO(TYP)+2V
IO=0.3A
RR=20log(ei(rms)/eo(rms))

Fig.4 Power Dissipation vs. Ambient Temperature

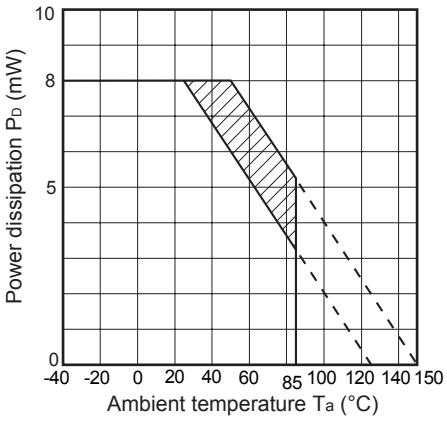

Note) Oblique line portion:Overheat protection may operate in this area.

Fig.5 Overcurrent Protection Characteristics (**PQ018ENAHZPH**)

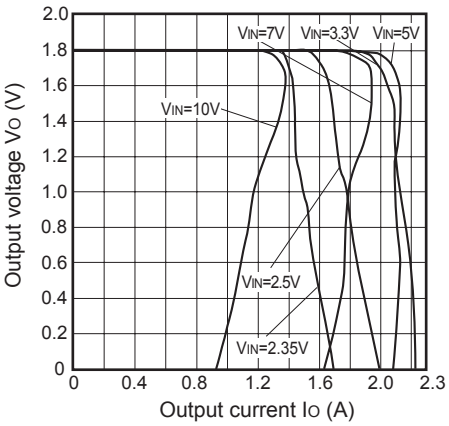


Fig.6 Output Voltage vs. Ambient Temperature (**PQ018ENAHZPH)**

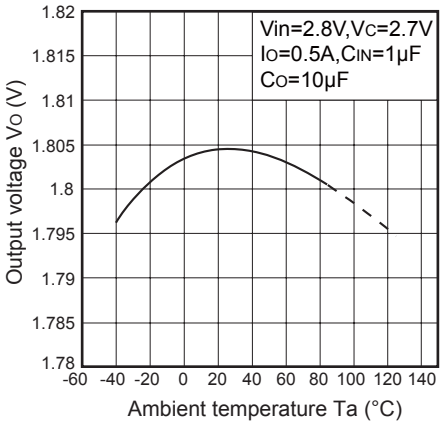


Fig.7 Dropout Voltage vs. Ambient Temperature (**PQ033ENAHZPH)**

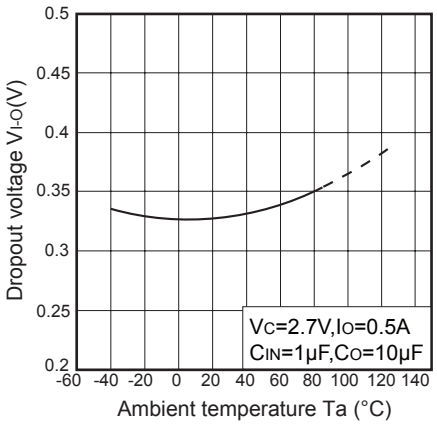


Fig.8 Line Regulation vs. Ambient Temperature

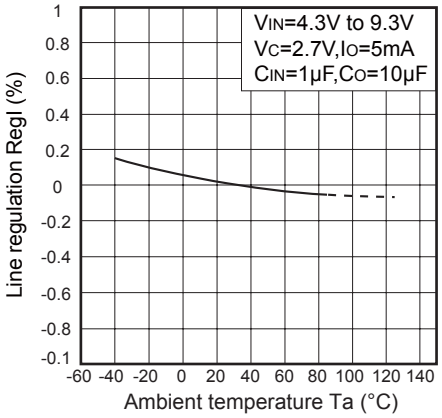


Fig.9 Load Regulation vs. Ambient Temperature(**PQ018ENAHZPH)**

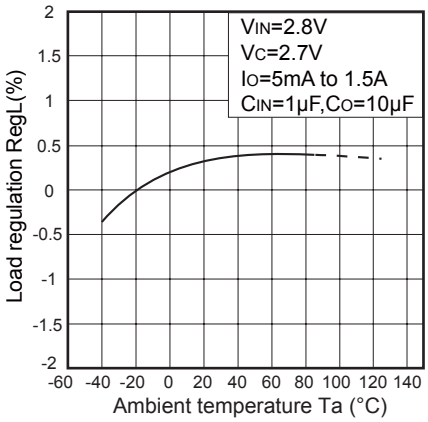


Fig.10 Quiescent Current vs. Ambient Temperature (**PQ018ENAHZPH**)

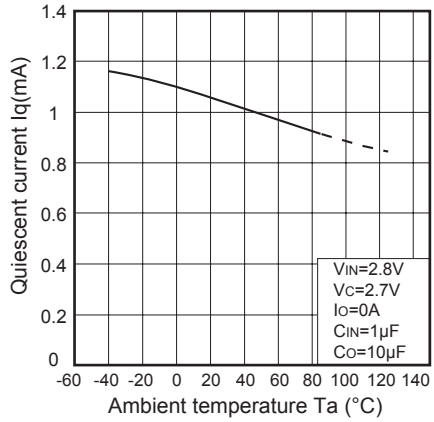


Fig.11 Output Voltage vs. ON/OFF Control Voltage (**PQ018ENAHZPH**)

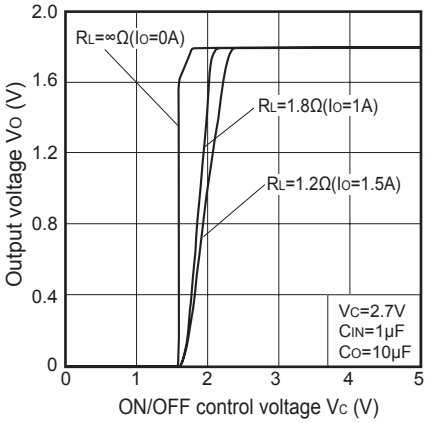


Fig.12 Circuit Operating Current vs. Input Voltage (**PQ018ENAHZPH**)

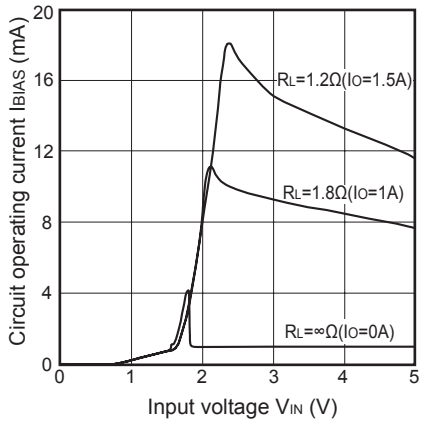


Fig.13 Dropout Voltage vs. Output Current (**PQ033ENAHZPH**)

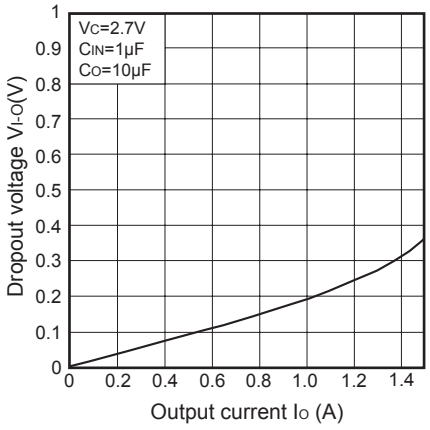


Fig.14 Ripple Rejection vs. Input Ripple Frequency (**PQxxxENAHZPH**)

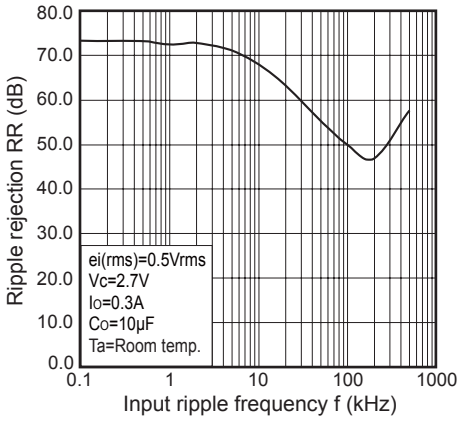


Fig.15 Ripple Rejection vs. Output Current (**PQ018ENAHZPH**)



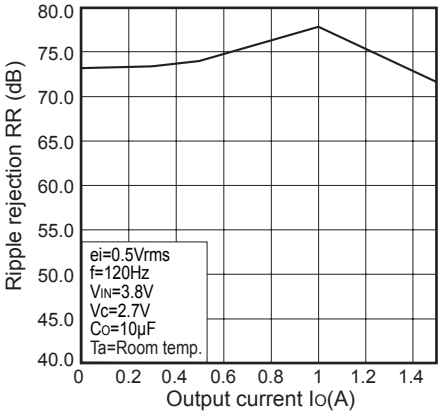


Fig.16 Power Dissipation vs. Ambient Temperature (Typical Value)

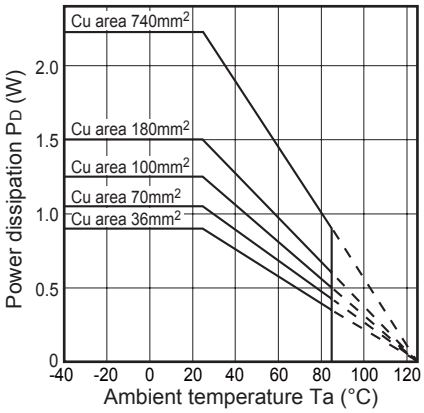

Mounting PCB



Material : Glass-cloth epoxy resin
Size : 50×50×1.6mm
Cu thickness : 35µm