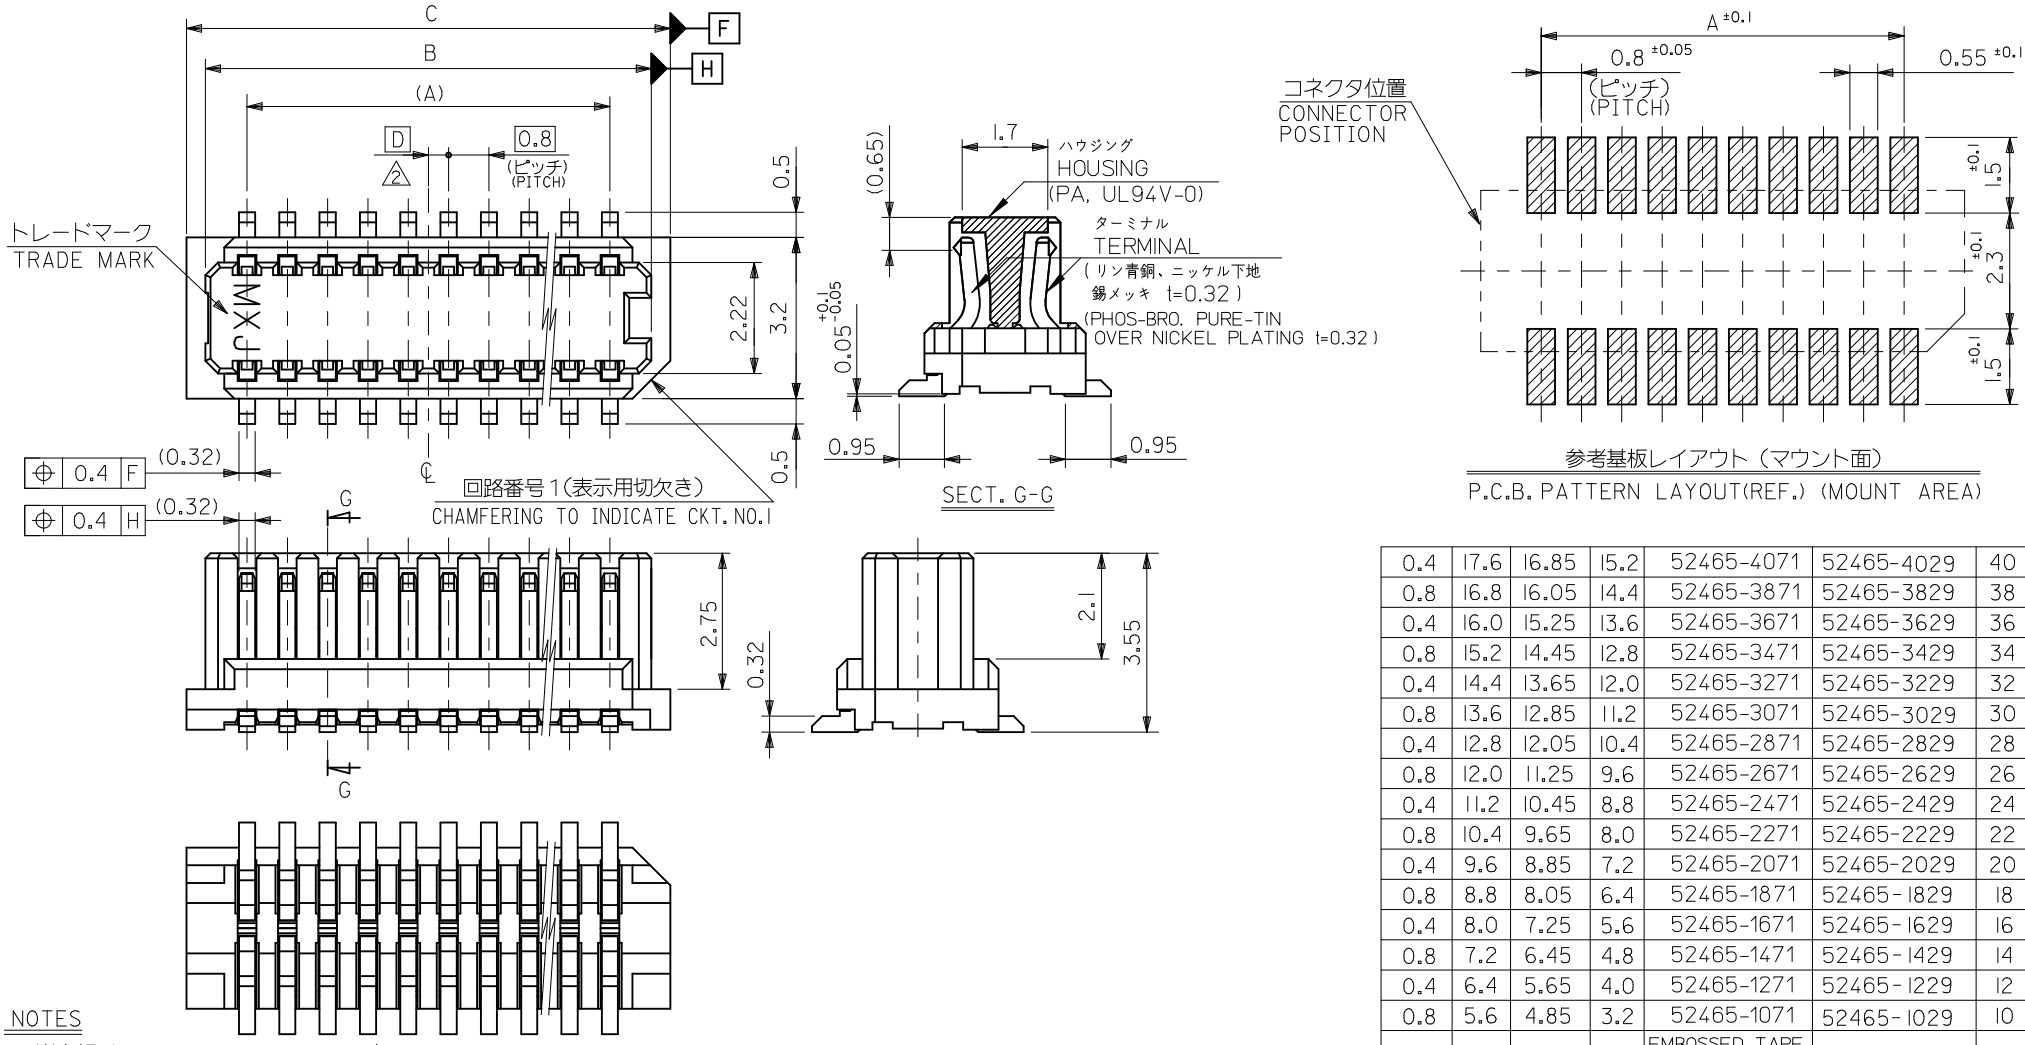


D	C	B	A	EMBOSSED TAPE ORDER No.	MATERIAL NO.	CKT.
0.4	17.6	16.85	15.2	52465-4071	52465-4029	40
0.8	16.8	16.05	14.4	52465-3871	52465-3829	38
0.4	16.0	15.25	13.6	52465-3671	52465-3629	36
0.8	15.2	14.45	12.8	52465-3471	52465-3429	34
0.4	14.4	13.65	12.0	52465-3271	52465-3229	32
0.8	13.6	12.85	11.2	52465-3071	52465-3029	30
0.4	12.8	12.05	10.4	52465-2871	52465-2829	28
0.8	12.0	11.25	9.6	52465-2671	52465-2629	26
0.4	11.2	10.45	8.8	52465-2471	52465-2429	24
0.8	10.4	9.65	8.0	52465-2271	52465-2229	22
0.4	9.6	8.85	7.2	52465-2071	52465-2029	20
0.8	8.8	8.05	6.4	52465-1871	52465-1829	18
0.4	8.0	7.25	5.6	52465-1671	52465-1629	16
0.8	7.2	6.45	4.8	52465-1471	52465-1429	14
0.4	6.4	5.65	4.0	52465-1271	52465-1229	12
0.8	5.6	4.85	3.2	52465-1071	52465-1029	10

NOTES

1. 嵌合相手：53307, 53309 シリーズ
   MATES WITH 53307, 53309 SERIES
2. ハウジングの ℄ から隣接するターミナルの ℄ 迄の位置を示す。
   SHOW POSITION FROM ℄ OF HOUSING TO ℄ OF ADJACENT TERMINALS.
3. 一対の基板の嵌合に於いて、本製品を２個以上使用することは推奨できません。
   MXJ DOSE NOT RECOMMEND THE USAGE OF TWO OR MORE OF THESE CONNECTORS BETWEEN A SINGLE PAIR OF P.C.BOARD.
4. 本製品は 52465-**27の鉛フリー品である。
   THIS PRODUCT IS LEAD FREE OF 52465-**27.
5. ELV及びRoHS適合品
   ELV AND RoHS COMPLIANT

REVISED
EC NO: J2010-0755 2008/12/17
DRWN:TNAKAGAWA01 2010/03/24
CH'KD:SMARUYAMA 2010/03/25
APPR:MSASAO
DESCRIPTION
A
REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 10:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: Y.SAKIYAMA DATE: 2004/02/17
CHECKED BY: M.SASAO DATE: 2004/02/17
APPROVED BY: M.SASAO DATE: 2004/02/17

TITLE: 0.8 BOARD TO BOARD CONN. HOUSING ASSY SMT

MOLEX INCORPORATED


MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-52465-028
SHEET NO.: 1 OF 1

SIZE A3


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DWG. NO. SD-52465-029

引き出し方向
PULL OUT DIRECTION

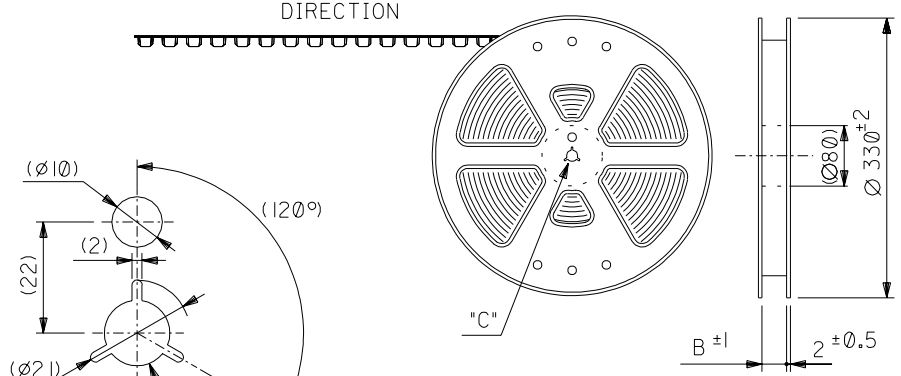

DETAIL "C"

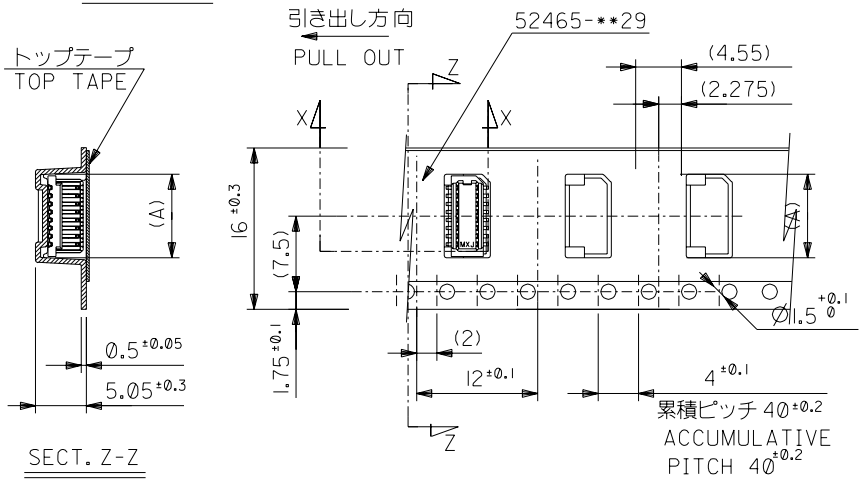


SECT. Z-Z

16mm幅キャリアテープ
16mm WIDTH CARRIER TAPE


NOTES

1. 梱包数量：1000 個／リール　NUMBER OF CONNECTORS:1000PCS/REEL


2. リードテープ長さ LEAD TAPE LENGTH

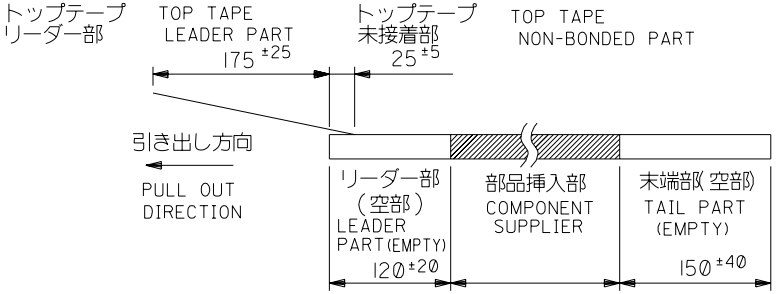

3. トップテープの剥離強度： 0.1 ～ 1.3N {10 ～ 130gf}（剥離方向は下図参照）
尚、本規格値は、出荷時に適用。（但し、輸送時に剥離が発生しない事。）
PEELING OFF FORCE OF TOP TAPE: 0.1 ～ 1.3N {10 ～ 130gf}
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLITED AT SHIPMENT
PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION

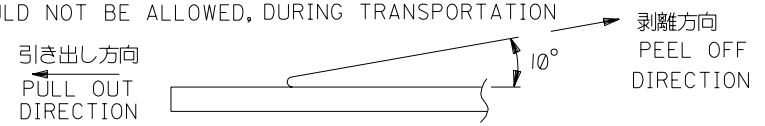

4. 材料
キャリアテープ：ポリプロピレン（PP）　CARRIER TAPE:POLYPROPYLENE
トップテープ：PET, PE, PEF　TOP TAPE:PET,PE,PEF
リール：ポリスチレン（PS）　REEL:POLYSTYREN(PS)
<リサイクル材を含む>　<RECYCLE MATERIAL CONTAINED>



SECT. X-X
(SCALE:5-1)

5. 本製品は 52465-**91 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52465-**91.

16	17.5	9.1	52465-1871	18
		8.3	52465-1671	16
		7.5	52465-1471	14
		6.7	52465-1271	12
		5.9	52465-1071	10
キャリアテープ幅 CARRIER TAPE WIDTH	B	(A)	MATERIAL NO.	CIRCUITS

MODEL NO. 52465-**71

DIMENSIONS: ☐ mm/INCH ☐ INCH/mm ☒ mm ONLY　SHT　REV

REVISE ON CAD ONLY

DO NOT SCALE DRAWING

EC NO.	DRWN:	CH'K:	APPR:	DESCRIPTION	REV
				RELEASED '04/02/17	
				EC NO. J2004-2482 DRWN: Y.SAKIYAMA CH'K: M.SASAO APPR: M.SASAO	
				ø	

MATERIAL 材料: SEE NOTES

FINISH 仕上げ

WIRE RANGE 適用電線範囲

INS. RANGE 被覆外径

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差

10 UNDER 未満	±0.2
10 OVER 以上 30 UNDER 未満	±0.25
30 OVER 以上	±0.3
ANGLE 角度	±3°

SCALE: —　DESIGN UNITS: ☒mm ☐INCH　THIRD ANGLE PROJECTION

DRAWN BY & DATE: Y.SAKIYAMA '04/02/17

CHECKED BY & DATE: M.SASAO '04/02/17

APPROVED BY & DATE: M.SASAO '04/02/17

CAD FILENAME: SD-52465-029.S01

TITLE: 0.8 B-To-B Hsg Assy SMT Embstp Pkg -LEAD FREE-

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART

DRAWING NO.: SD-52465-029

SHEET NO.: 1 OF 2


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

SIZE B


SD-52465-029.S01

EN-02J(097) MXJ-54


DWG. NO. SD-52465-029

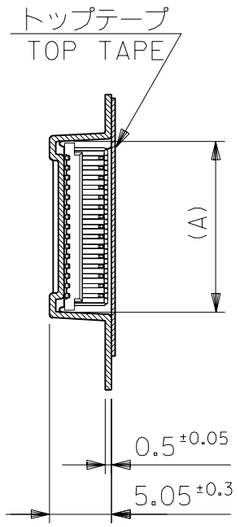


SECT. Y-Y

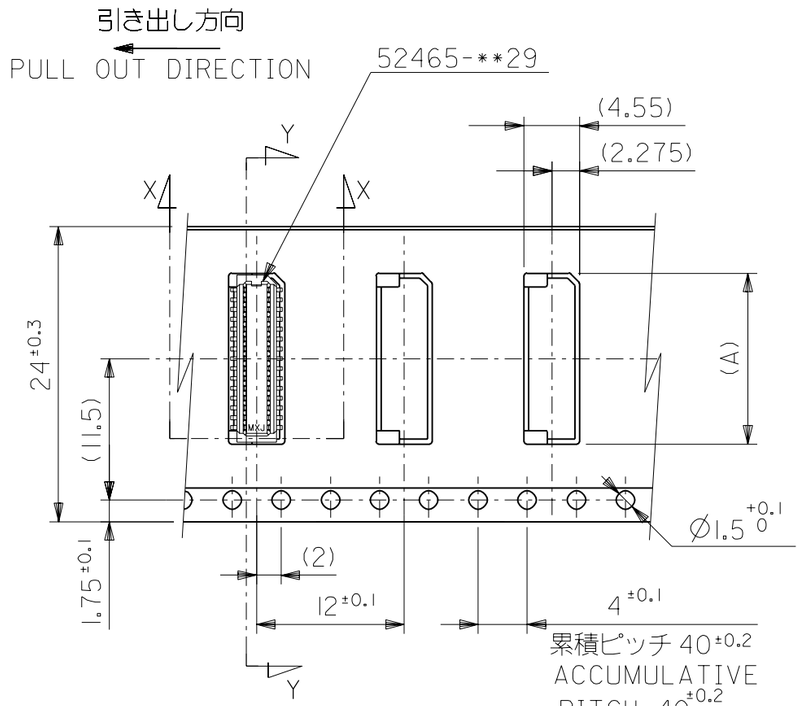


24mm幅キャリアテープ
24mm WIDTH CARRIER TAPE

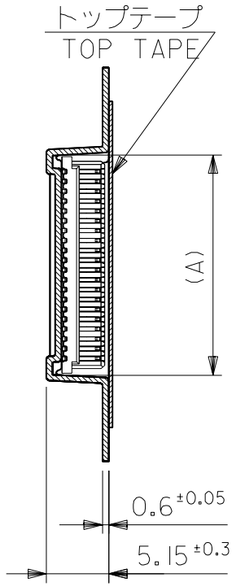


SECT. Z-Z

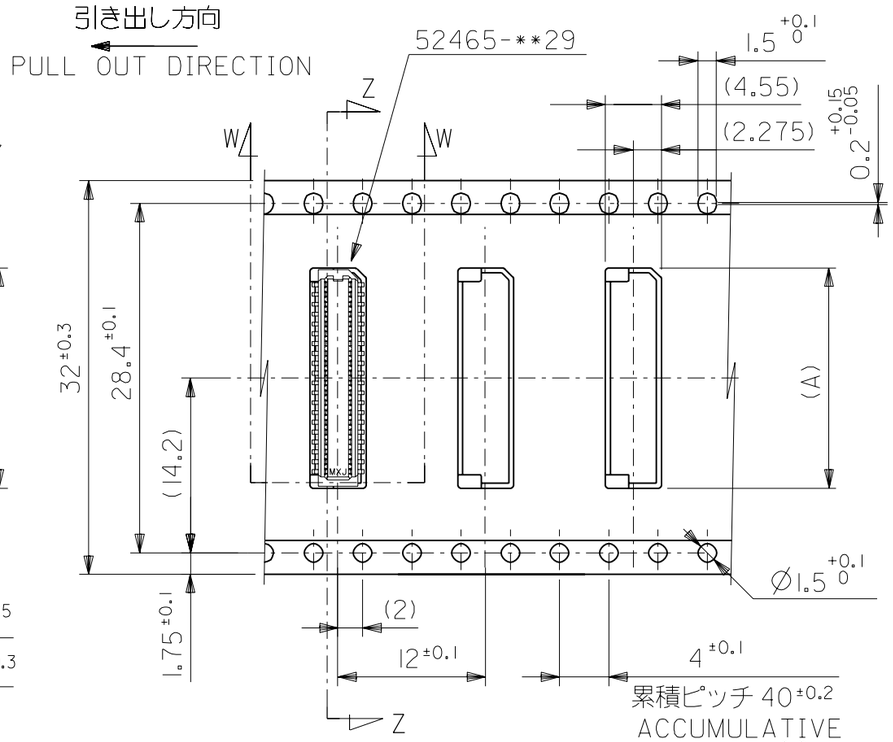

32mm幅キャリアテープ
32mm WIDTH CARRIER TAPE

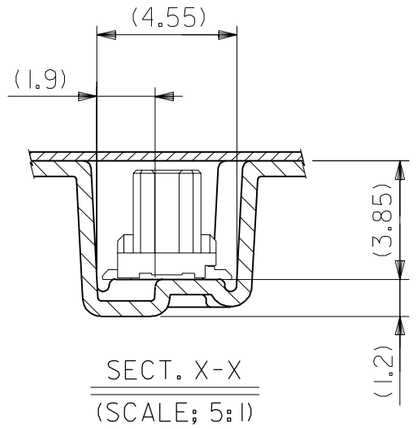

SECT. X-X
(SCALE; 5:1)

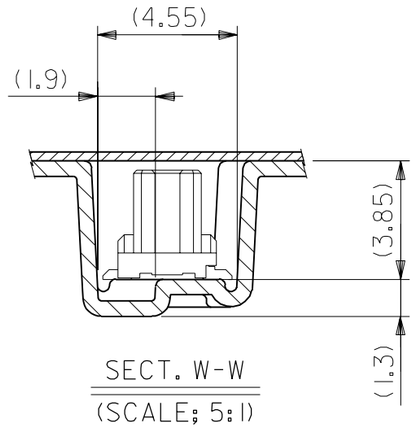

SECT. W-W
(SCALE; 5:1)

キャリアテープ幅 CARRIER TAPE WIDTH	B	(A)	MATERIAL NO.	CIRCUITS
32	33.5	17.9	52465-4071	40
		17.1	52465-3871	38
24	25.5	16.3	52465-3671	36
		15.5	52465-3471	34
		14.7	52465-3271	32
		13.9	52465-3071	30
		13.1	52465-2871	28
		12.3	52465-2671	26
		11.5	52465-2471	24
		10.7	52465-2271	22
		9.9	52465-2071	20

MODEL NO. 52465-**71

DO NOT SCALE DRAWING

	EC NO.	DRWN:	CH'K:	APPR:
	EC NO.	DRWN:	CH'K:	APPR:
	EC NO.	DRWN:	CH'K:	APPR:
	EC NO.	DRWN:	CH'K:	APPR:
REV	RELEASED '04/02/17	EC NO. J2004-2482	DRWN: Y.SAKIYAMA	CH'K: M.SASAO	APPR: M.SASAO	DESCRIPTION
	O					

MATERIAL 材料: SEE SHEET 1 OF 2

FINISH 仕上げ: ——//——

WIRE RANGE 適用電線範囲: ——//——

INS. RANGE 被覆外径: ——//——

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差

10 UNDER 未満	±0.2
10 OVER 以上 30 UNDER 未満	±0.25
30 OVER 以上	±0.3
ANGLE 角度	±3°

SCALE: ——//—— | DESIGN UNITS: ☒mm ☐INCH | THIRD ANGLE PROJECTION | DIMENSIONS: ☐mm/INCH ☐INCH/mm ☒mm ONLY | SHT | REV | REVISE ON CAD ONLY

DRAWN BY & DATE: Y.SAKIYAMA '04/02/17

CHECKED BY & DATE: M.SASAO '04/02/17

APPROVED BY & DATE: M.SASAO '04/02/17

CAD FILENAME: SD-52465-029.S02

TITLE: 0.8 B-To-B Hsg Assy SMT Embstp Pkg -LEAD FREE-

molex MOLEX INCORPORATED

MATERIAL NO.: SEE CHART | DRAWING NO.: SD-52465-029 | SHEET NO.: 2 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

SIZE B

SD-52465-029.S02 A

EN-02J(097) MXJ-54