


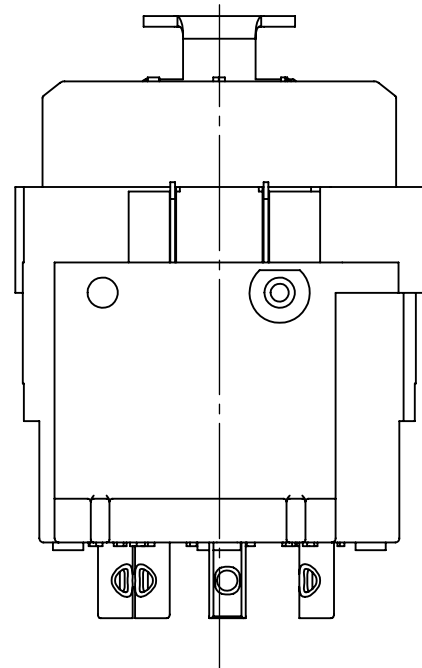
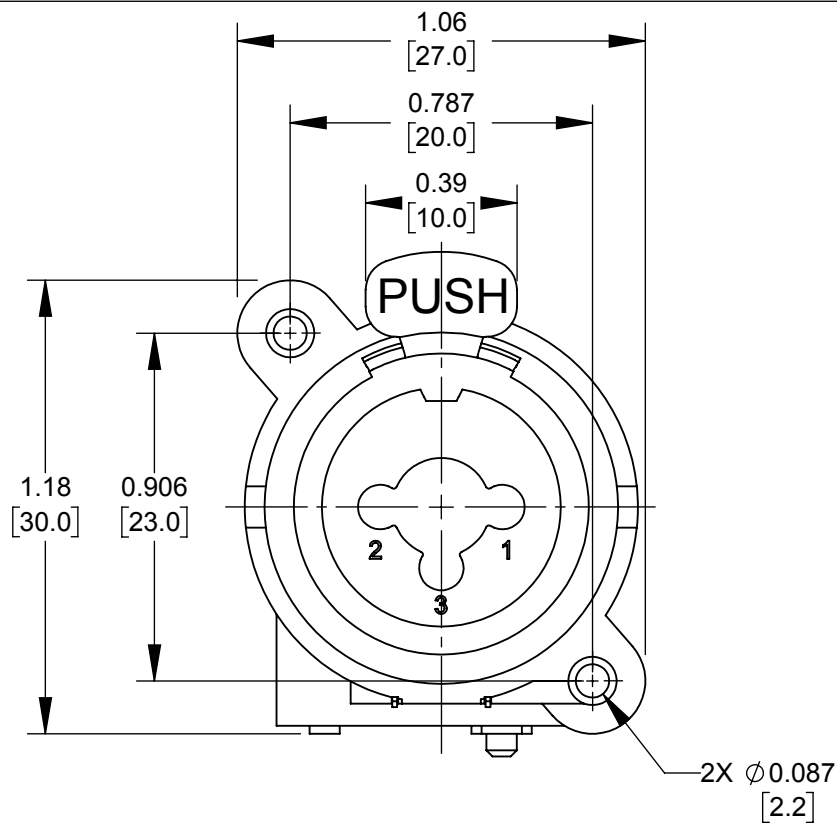
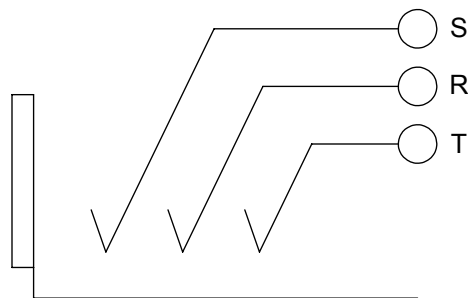


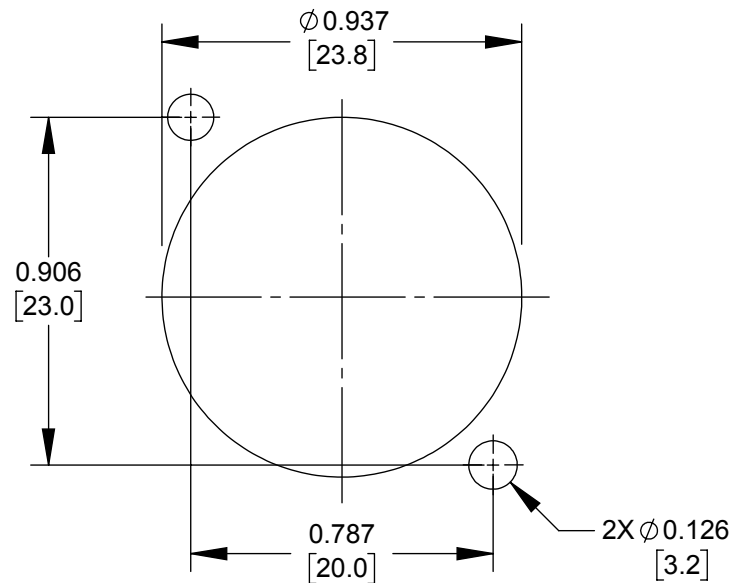


JACK SCHEMATIC

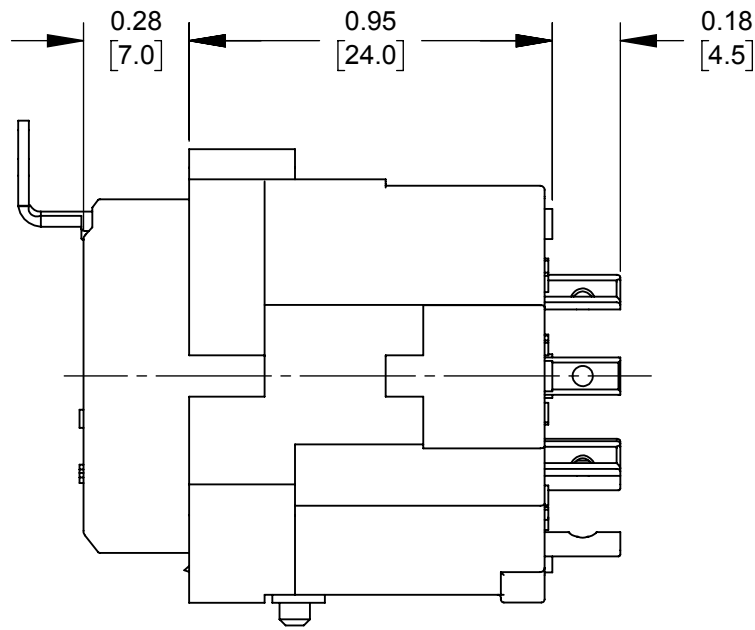

XLR SCHEMATIC



PANEL CUT OUT
COMPONENT SIDE

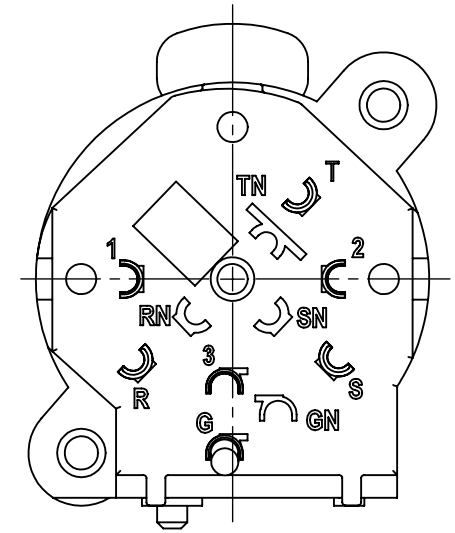

NOTES:

- MATERIALS:
HOUSING - BLACK THERMOPLASTIC
CONTACTS - COPPER ALLOY GOLD PLATED
PUSH BUTTON/SPRING - COPPER ALLOY NICKEL PLATED
GROUND SPRING - COPPER ALLOY SILVER PLATED
- OPERATING SPECS:
OPERATING/STORAGE TEMP: -30 °C TO 80 °C
RATED VOLTAGE/RATE CURRENT: 50V/7.5A
INSULATION RESISTANCE: 1/4 JACK: 100MΩ, XLR: INTIAL 2GΩ,
AFTER DAMP HEAT:>0.5GΩ
CONTACT RESISTANCE: **1/4 JACK:** 50mΩ,
XLR: 30mΩ
DIELECTRIC STRENGTH: **1/4 JACK:** 0.5mA, AC 500V.
XLR: 0.5mA, AC 500V
LIFE: **1/4 JACK:** 2,000 CYCLES,
XLR: 1000 CYCLES

3. THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES [mm] - TWO PLACE DECIMALS ±0.02 [0.5] - THREE PLACE DECIMALS ±0.005 [0.13]	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.									
						SIZE	WIDTH		MULT		LBS/M		TEMPER		
						FINISH						MATERIAL			
						SPEC No.						SPEC No.			
						FIRST USED ON				SCALE 2:1		Switchcraft®			
						DATE DRAWN	BY	CHKD		APVD					
A	27996	2/8/18	TJK	TJK		1/8/17	AB	AB 1/8/17		TJK 2/16/18					
REV	ECO NUMBER	DATE	BY	APVD	NAME 1/4" PLUG AND 3 PIN XLR, COMBO JACK, SOLDER CUP, RoHS										
REVISIONS					DO NOT SCALE DRAWING					PART No. PXC					REV A