

RA8 SERIES ROCKER SWITCH


ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS



APPLICATIONS / MARKETS



Commercial Appliances



Industrial Controls



Floor Care Appliances



Instrumentation



Medical/Dental



Electrical Housewares



RoHS

SPECIFICATIONS

Electrical Rating:

Option 3: 10A 125VAC [cURus]

Option C: 16A @ 125VAC 1/3HP T105 [cURus]
10A @ 250VAC 1/3HP T105 [cURus]

Operating Temperature: -20°C to 105°C

Electrical Life: 10,000 Cycles

Mechanical Life: 100,000 Cycles

Contact Resistance: 35mΩ Max. at 500VDC

Insulation Resistance: 500MΩ Min. at 500VDC

Dielectric Strength: 1,500VAC for 1 min.

FEATURES & BENEFITS

- High Contact Rating Switch
- Industry Standard 13mm x 19mm Cutout
- Illumination Options
- Multiple Marking Options
- Multiple Terminal Options
- 1 or 2 Pole Maintained Functions

PART NUMBER CONFIGURATOR

Series	Terminal	Function	Rating	Body Color	Actuator Color	Marking Color	Marking Type	Lens Style	Lens Color	Lamp Voltage
RA8	1 - 4.8mm Tab 3 - PCB Pins	1 - 1 Pole Off-On 2 - 2 Pole Off-On	3 - 10A 125VAC C - 16A 125VAC	1 - Black 2 - White 4 - Grey	0 - Illuminated 1 - Black 2 - White 4 - Grey 9 - Red	0 - None 1 - Black 2 - White 8 - Red	0 - None 1 - I/O Vertical 3 - ON-OFF Vertical 4 - ON-OFF Horizontal R - I/O Horizontal	None - Not Illuminated 1 - Full	None - Not Illuminated 0 - White 1 - Red 2 - Orange 3 - Green	None - Not Illuminated 3 - 6V 4 - 12V 6 - 125V 7 - 250V

Specifications subject to change without notice 6.23.2022



E-SWITCH®

www.e-switch.com




800.867.2717

1

RA8 SERIES ROCKER SWITCH

BODY DIMENSIONS

FUNCTION - 2 POLE /
TERMINAL - 3 (PCB Pins) / LENS STYLE - NONE

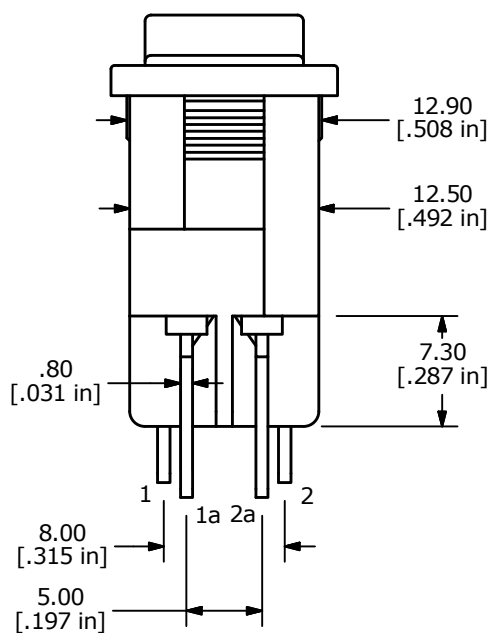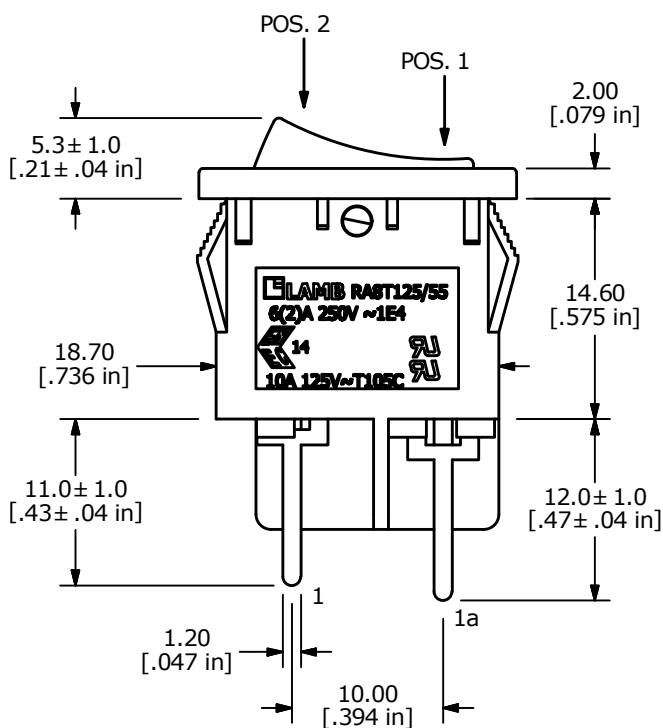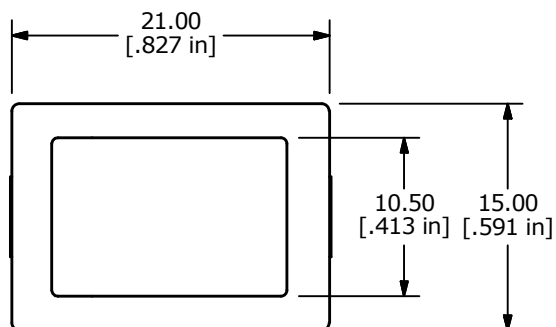

E-SWITCH®

www.e-switch.com




800.867.2717

2

ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS

CAP OPTIONS	TOGGLE SWITCHES	TACTILE SWITCHES	SNAP ACTION SWITCHES	SLIDE SWITCHES	ROTARY SWITCHES	ROCKER SWITCHES	PUSHBUTTON SWITCHES	NAVIGATION SWITCHES	KEYLOCK SWITCHES	DIP SWITCHES	DETECTOR SWITCHES	ANTI-VANDAL SWITCHES
----------------	--------------------	---------------------	-------------------------	-------------------	--------------------	--------------------	------------------------	------------------------	---------------------	-----------------	----------------------	-------------------------

FUNCTION - 1 POLE /
TERMINAL - 1 (4.8mm TAB) / LENS STYLE - 1 FULL ILLUMINATION

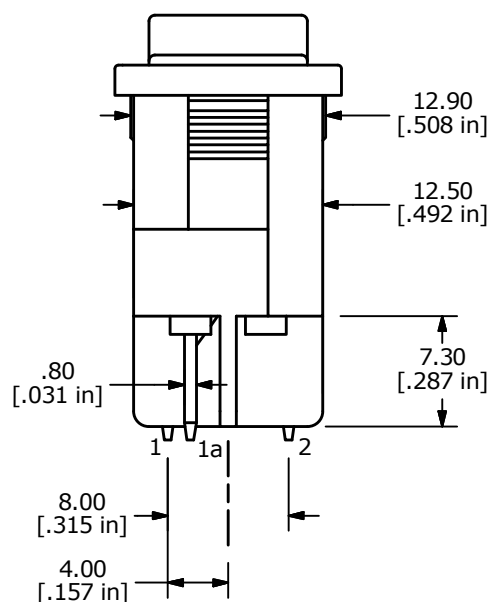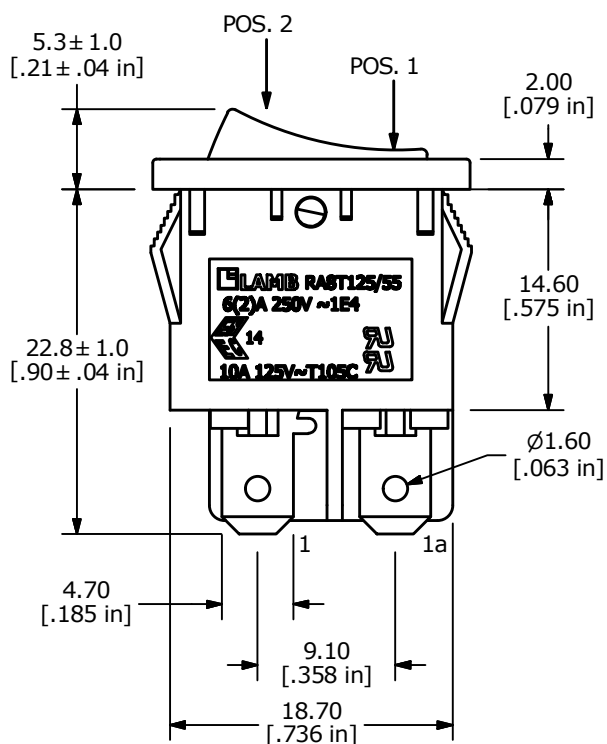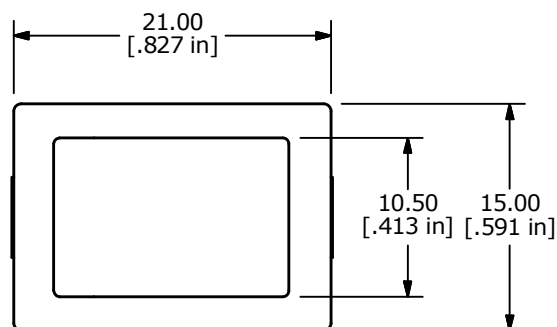

www.e-switch.com


800.867.2717

RA8 SERIES ROCKER SWITCH


MARKING TYPE




0 - NONE




1 - I/O
VERTICAL



3 - ON-OFF
VERTICAL




4 - ON-OFF
HORIZONTAL




R - I/O
HORIZONTAL

PANEL CUT OUT, PCB LAYOUT, & SCHEMATICS


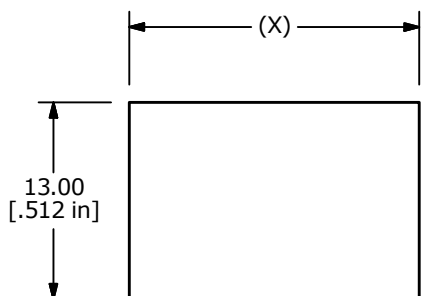


PANEL THICKNESS	X
0.75 - 1.25	19.2
1.25 - 2.00	19.4
2.00 - 3.00	19.6


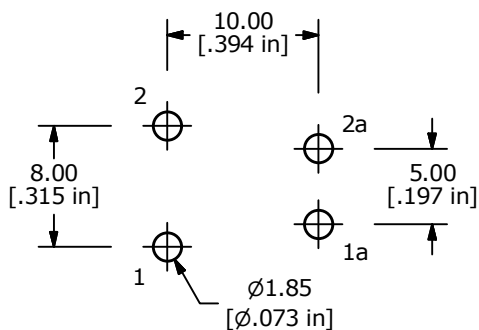


RECOMMENDED PANEL CUTOUT AND PCB LAYOUT

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	1-1a, 2



SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	1-1a, 2-2a



SCHEMATIC OPTIONS

