Features

Regulated Converters


- 7.5W in DIP24 package
- 1kVDC/1s, 2kVDC/1s or 3kVDC/1s isolation options
- Continuous short circuit protection (power limiting)
- 5 Side Shielded Metal Case
- Full SMD internal design
- Through Hole or SMD Pinning Options
- ON/OFF CTRL pin
- Efficiency to 86%

RECOM
DC/DC Converter

REC7.5-RW

7.5 Watt DIP24 or SMD Metal Case Single and Dual

3 YEAR warranty

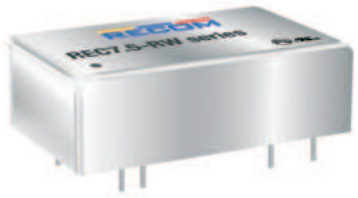

Description

The REC7.5-xxxxSRW/DRW series offer single and dual regulated outputs in a DIP24 package with 1kVDC/1s, 2kVDC/1s or 3kVDC/1s options and are suitable for higher power industrial applications. ON/OFF CTRL is possible with the /CTRL option and SMD pinning is offered with the /SMD option. The converters can deliver 140% rated power for short periods of time to cope with applications with large capacitive loads or high start up currents.

Selection Guide

Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Output Current [mA]	Efficiency typ. (1) [%]	max. Capacitive Load (2) [µF]
REC7.5-xx3.3SRW	9-18, 18-36, 36-72	3.3	1800	78	6800
REC7.5-xx05SRW	9-18, 18-36, 36-72	5	1500	79-82	6800
REC7.5-xx09SRW	9-18, 18-36, 36-72	9	833	81-84	6800
REC7.5-xx12SRW	9-18, 18-36, 36-72	12	625	82-85	6800
REC7.5-xx15SRW	9-18, 18-36, 36-72	15	500	83-86	6800
REC7.5-xx05DRW	9-18, 18-36, 36-72	±5	±750	79-82	±2200
REC7.5-xx09DRW	9-18, 18-36, 36-72	±9	±417	81-84	±2200
REC7.5-xx12DRW	9-18, 18-36, 36-72	±12	±312	82-85	±2200
REC7.5-xx15DRW	9-18, 18-36, 36-72	±15	±250	83-86	±2200

Notes:

Note1: Efficiency is tested at nominal input and full load at +25°C ambient

Note2: Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter

c UL us E358085

UL60950-1 certified
IEC60950-1 certified
EN60950-1 certified
EN55032 complaint

Model Numbering

REC7.5-___ ___ __RW/H_/A/M/SMD/CTRL-R

- nom. Input Voltage
- Output Voltage
- **S**ingle or **D**ual
- Isolation (3)
- Packaging (6)
- CTRL Option (5)
- Case Style (4)

Notes:

Note3: "**/H1**" = 1kVDC/1s isolation
"**/H2**" = 2kVDC/1s isolation
"**/H3**" = 3kVDC/1s isolation

Note4: add suffix "**/SMD**" for SMD package, without suffix = standard DIP24 THT package. If the option "/SMD" is used, the maximum allowed isolation voltage is 2kVDC/1s because of the shorter distance between pins and the metal case

Note5: add "**/CTRL**" for Control Pin option. If CTRL option is not chosen, Pin 1 will be absent.

Note6: add suffix "**-R**" for tape and reel packaging, without suffix standard tube packaging. tape and reel option only available for SMD case style

PREFERRED ALTERNATIVES
For new medical applications:
REM6E

Ordering Examples:

REC7.5-1205SRW/H3/A/M/CTRL	9-18Vin	5Vout	Single output	3kVDC isolation	with CTRL Pin	THT	tube packaging
REC7.5-2412DRW/H2/A/SMD-R	18-36Vin	±12Vout	Dual output	2kVDC isolation	no CTRL function	SMD	tape and reel packaging
REC7.5-2412SRW/H1/A/M	18-36Vin	12Vout	Single output	1kVDC isolation	without CTRL Pin	THT	tube packaging
REC7.5-4815DRW/H2/A/M/SMD-R	36-72Vin	±15Vout	Dual output	2kVDC isolation	no CTRL function	SMD	tape and reel packaging

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)


BASIC CHARACTERISTICS

Parameter	Condition		Min.	Typ.	Max.
Internal Input Filter					PI Network
Input Voltage Range	nom. Vin= 12VDC 24VDC 48VDC		9VDC 18VDC 36VDC		18VDC 36VDC 72VDC
Minimum Load [7]			10%		
No Load Power Consumption					300mW
ON/OFF CTRL	DC-DC ON DC-DC OFF		Open or 0VDC<V_{CTRL}<1.2VDC 2.2VDC<V_{CTRL}<12VDC		
Internal Operating Frequency			150kHz		240kHz
Output Ripple and Noise	20MHz BW	3.3VDC others			100mVp-p 50mVp-p


Notes:

Note7: Operation below 10% load will not harm the converter, but specifications may not be met

Efficiency vs. Load

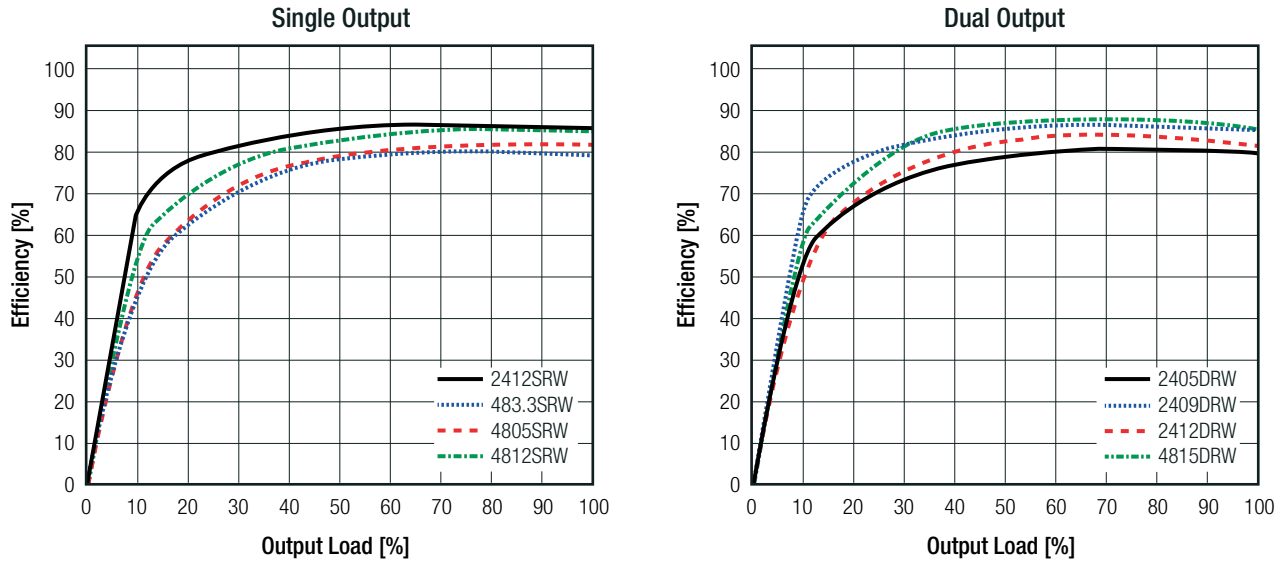

ON/OFF CTRL

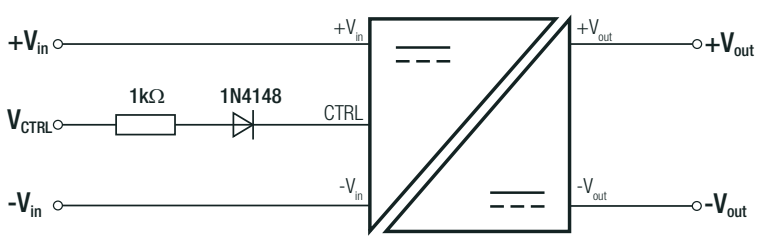



DC-DC ON: Open or 0VDC<V_{CTRL}<1.2VDC
DC-DC OFF: 2.2VDC<V_{CTRL}<12VDC

REC7.5-RW Series

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

REGULATIONS

Parameter	Condition	Value
Output Accuracy		±2.0% max.
Line Regulation	low line to high line, full load	0.4% max.
Load Regulation [7]	25% to 100% load	0.8% max.

PROTECTIONS

Parameter	Type		Value
Short Circuit Protection (SCP) [8]	below 100mΩ		continuous, auto recovery
Isolation Voltage [9]	"/H1" version	tested for 1 second rated for 1 minute	1kVDC 500VAC/ 60Hz
	"/H2" version	tested for 1 second rated for 1 minute	2kVDC 1kVAC/ 60Hz
	"/H3" version	tested for 1 second rated for 1 minute	3kVDC 1.5kVAC/ 60Hz
Isolation Resistance			1GΩ min.
Isolation Capacitance			50pF typ.

Notes:

Note8: Max. Temperature = +50°C during the short circuit conditions


Note9: For repeat Hi-Pot testing, reduce the time and/or the test voltage

Note10: Refer to local safety regulations if input over-current protection is also required. Recommended fuse: slow blow type

ENVIRONMENTAL

Parameter	Condition		Value
Operating Temperature Range	with derating @ free air convection (see graph)		-40°C to +85°C
Thermal Impedance	0.1m/s natural convection		12K/W
Operating Altitude	according to 6060-1		3000m
Operating Humidity	non-condensing		95% RH max.
Pollution Degree			PD2
MTBF	according to MIL-HDBK-217F, G.B.	+25°C +71°C	800 x 10^3 hours >200 x 10^3 hours

Derating Graph
(@ Chamber and free air convection)

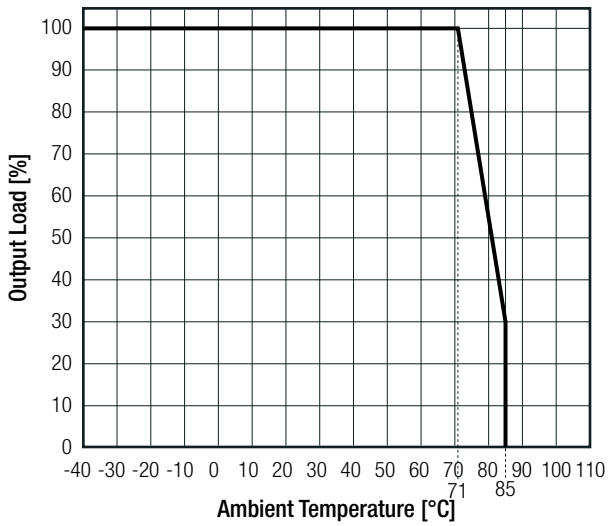


Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

SAFETY AND CERTIFICATIONS

Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	E358085	UL60950-1, 2nd Edition, 2011 CAN/CSA-C22.2 No. 60950-1-03, 2nd Edition, 2011
Information Technology Equipment, General Requirements for Safety	LVD1605077-01	IEC60950-1:2005, 2nd Edition + A2:2013 EN60950-1:2006, A2:2013
Medical Electrical Equipment Part 1: General Requirements for Basic Safety and Essential Performance	SPC1006048	IEC60601-1:1988 + A2:1995 EN60601-1:1990 + A13 :1996
EAC	RU-AT.49.09571	TP TC 004/2011
RoHS		RoHS-2011/65/EU + AM-2015/863

EMC Compliance	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission requirements	with external filter (see filter suggestion below)	EN55032, Class A and Class B

EMC Filtering Suggestions according to EN55032

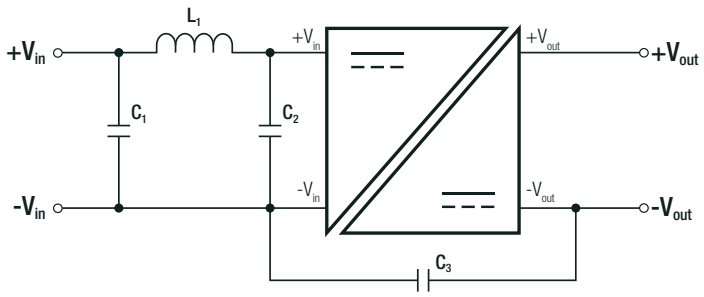

Component List Class A

MODEL	C1	C2	C3	L1
all	10µF/50V MLCC	10µF/50V MLCC	1000pF/4kVDC	N/A

Component List Class B

MODEL	C1	C2	C3	L1
all	10µF/50V MLCC	10µF/50V MLCC	1000pF/4kVDC	820µH Choke

DIMENSION AND PHYSICAL CHARACTERISTICS


Parameter	Type	Value
Material	case base potting PCB	nickel plated copper non-conductive black plastic epoxy, (UL94 V-0) FR4, (UL94 V-0)
Dimension (LxWxH)	DIP24 SMD	32.0 x 20.3 x 10.5mm 32.0 x 20.3 x 11.2mm
Weight		16g typ.

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

Dimension Drawing (mm)

DIP24 package

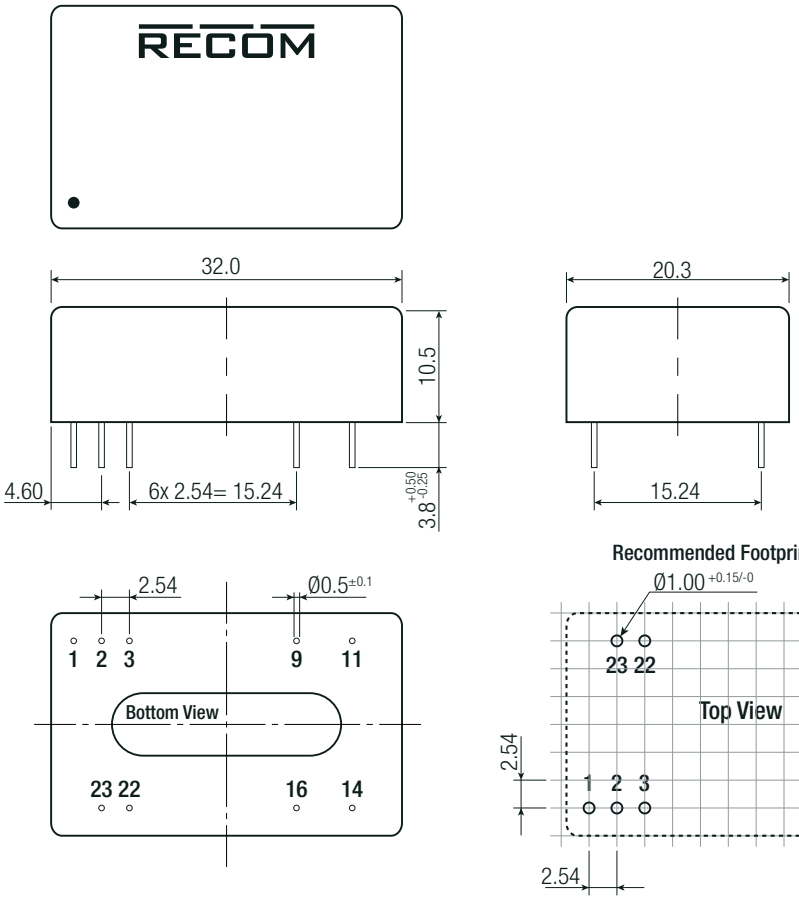


DIP24 Pinning (/H1, /H2, /H3)

Pin #	Single	Dual
1 (option)	CTRL	CTRL
2, 3	-Vin	-Vin
9	NC	Com
11	NC	-Vout
14	+Vout	+Vout
16	-Vout	Com
22, 23	+Vin	+Vin

NC= No Connection
Tolerance: xx.x= ±0.5mm
xx.xx= ±0.25mm

SMD package

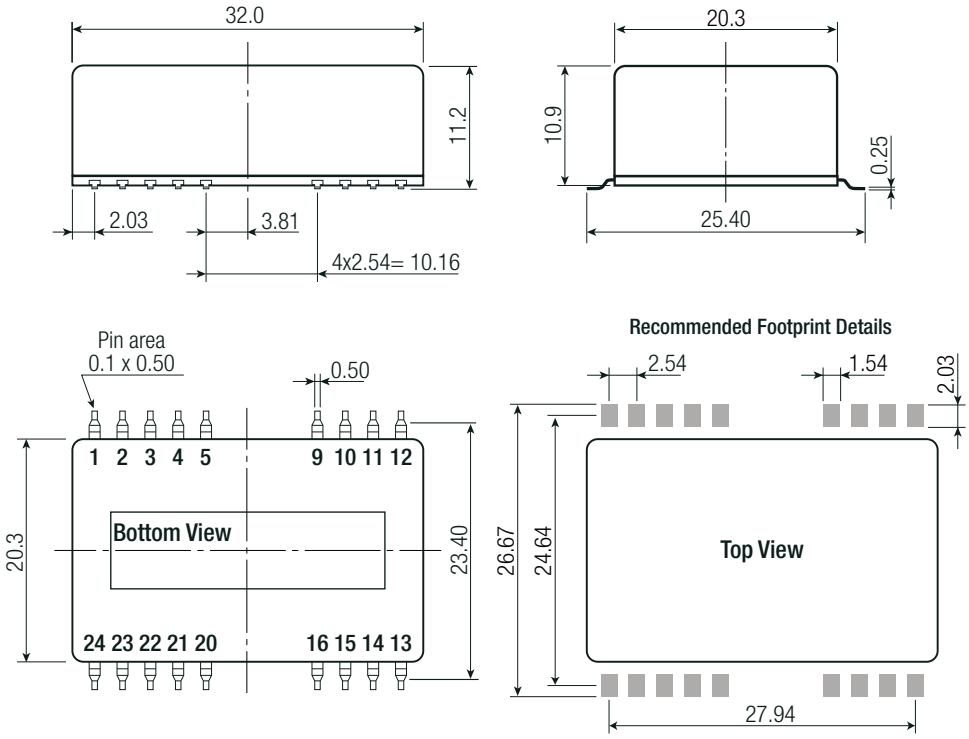

SMD Pinning (/H1, /H2)

Pin #	Single	Dual
1 (option)	CTRL	CTRL
2, 3	-Vin	-Vin
4, 5	NC	NC
9	NC	Com
10,12,13,15	NC	NC
11	NC	-Vout
14	+Vout	+Vout
16	-Vout	Com
20, 21, 24	NC	NC
22, 23	+Vin	+Vin

NC= No Connection
Tolerance: xx.x= ±0.5mm
xx.xx= ±0.25mm

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

PACKAGING INFORMATION			
Parameter	**Type**		**Value**
Packaging Dimension (LxWxH)	DIP24	tube	530.0 x 23.0 x 19.0mm
	SMD	tube	530.0 x 32.0 x 19.0mm
		tape and reel (carton)	355.0 x 342.0 x 70.0mm
Packaging Quantity	tube		15pcs
	tape and reel		100pcs
Tape Width			44mm
Storage Temperature Range			-55°C to +125°C
Storage Humidity	non-condensing		95% RH max.

The product information and specifications may be subject to changes even without prior written notice.The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.