


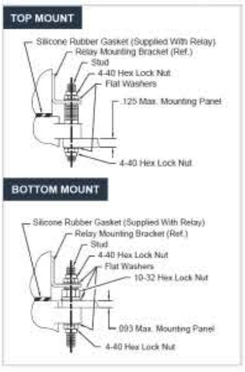
RSE112036

Series:	MIL-PRF-12883
Type:	Low Profile
Number of Poles:	1
Number of Contacts:	5
Number of Contacts per Size:	3, 2
Contact Size:	12, 16
With or Without Hardware:	With
With or Without Contacts:	With
Configuration:	A
Amperage:	25
Mounting Stud:	Fixed
QPL:	M12883/55-02
Mil-Spec:	Active Mil-Spec
Temperature (C°):	-65 to 125
Insulation Resistance:	1000 Megaohms Min.
Dielectric Withstanding Voltage:	1500 VRMS at Sea Level; 500 VRMS at 80,000 ft.
Vibration:	MIL-STD-202, Method 204 Test Condition G
Shock:	MIL-STD-202, Method 213 Test Condition C
Body:	Polyetherimide per ASTM-D5205
Grommet:	Silicone Rubber per A-A-59588
Hardware Material:	Stainless Steel or Steel with Cadmium Chromate Finish
Contact Retainers:	Stainless Steel
Removable Socket Contacts:	Copper Alloy, Hard Gold Plated in Accordance with MIL-G-45204
Configuration Drawing:	
Mounting Panel Cutout Drawing:	
Dimensions Drawing:	
Mounting Instructions:	
Engineering Drawing:	RSE112034_C.pdf