
ELECTRICAL SPECIFICATION


PARAMETER	SYMBOL	CONDITIONS	VALUE	UNIT
Nominal Frequency	fo	Vcc ±5%	32.000	MHz
Supply voltage, nom.	V_{CC}	Vcc ±5%	3.3	VDC
Supply current, max	I_S	Vcc ±5%	2.5	mA
Operating temperature	Ta		-30 ~ +85	°C
Storage temperature	T(stg)	Absolute max	-40 ~ +85	°C
Frequency Stability				
vs. Temperature	Δf/fo(Ta)	Reference to +25°±2°C (-30 to 85°C)	±0.5	ppm
vs. Supply Voltage	$\Delta f/f_V$	Vcc ±5%	±0.2	ppm
vs. Load	$\Delta f/f_L$	Load ±10%	±0.2	ppm
vs. Aging Max	Δf/fo(year)	Per Year at +25°C ± 2°C	±1.0	ppm
Initial Frequency Calibration, max	f_C	Measured at 25°C, before shipment	±1.0	ppm
Reflow Shift, max		2 consecutive reflows, after 2 hours relaxation	±1.0	ppm
Start Up Time			2	ms
Output Level, Clipped Sine Wave, min		10kΩ // 10 pF ±10%	0.8	V_{P-P}
Phase Noise @ Freq. offset, typ	£ (Δf)	@10Hz	-87	dBc/Hz
		@100Hz	-112	dBc/Hz
		@1kHz	-132	dBc/Hz
		@10kHz	-147	dBc/Hz
		@100kHz	-151	dBc/Hz

MECHANICAL SPECIFICATION

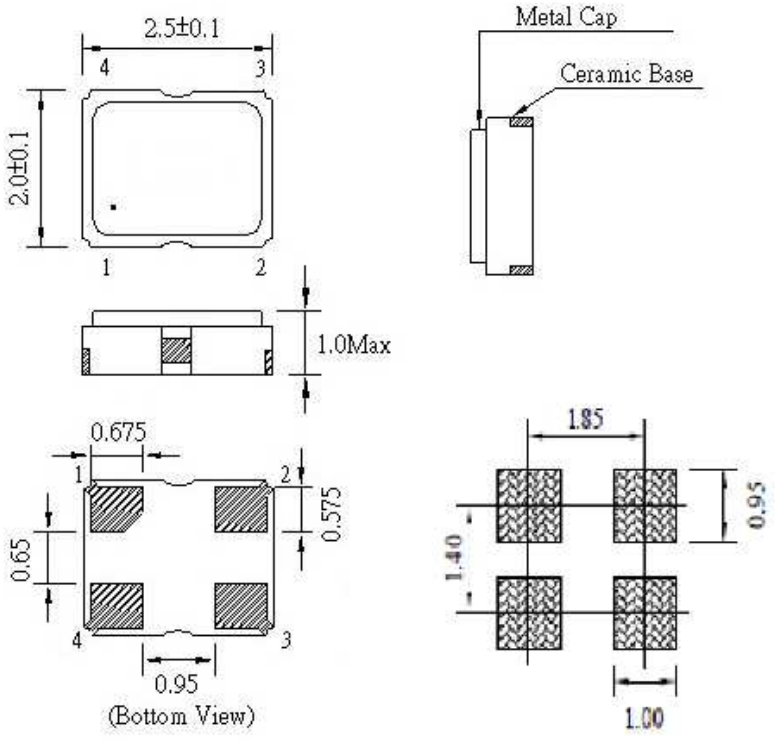

PIN FUNCTIONS:
[1] GND
[2] GND
[3] OUTPUT
[4] VCC

REFLOW PROFILE

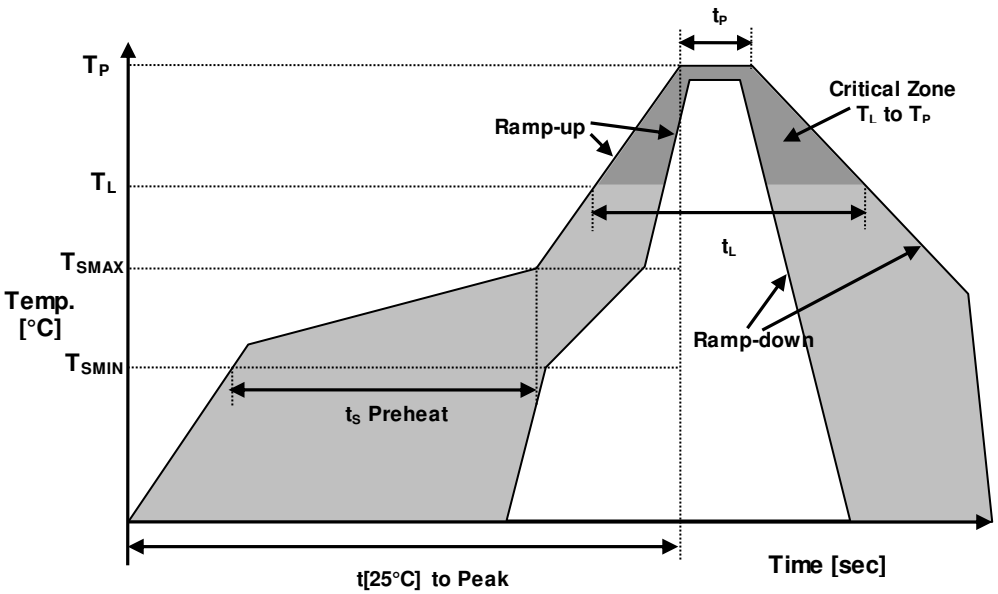

Reflow profile		
Temperature Min Preheat	T_{SMIN}	150°C
Temperature Max Preheat	T_{SMAX}	200°C
Time (T_{SMIN} to T_{SMAX})	t_S	60-180 sec.
Temperature	T_L	217°C
Peak Temperature	T_P	260°C
Ramp-up rate	R_{UP}	3°C/sec max.
Ramp-down rate	R_{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t_P	10 sec.
Time t[25°C] to Peak Temperature	t[25°C] to Peak	480 sec.
Time	t_L	60-150 sec.

ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH	Compliant
RoHS	Compliant
TERMINATION FINISH	Au

• MARKING

Rx320
•AF3yw

x – Internal Production ID code
y – Year code
w – Week code

YEAR CODE	
Year	Code
2018	8
2019	9
2020	0
2021	1
2022	2
2023	3
2024	4
2025	5
2026	6
2027	7
2028	8
2029	9

ALPHA WEEK CODE TABLE					
Week	Code	Week	Code	Week	Code
1	a	19	s	37	K
2	b	20	t	38	L
3	c	21	u	39	M
4	d	22	v	40	N
5	e	23	w	41	O
6	f	24	x	42	P
7	g	25	y	43	Q
8	h	26	z	44	R
9	i	27	A	45	S
10	j	28	B	46	T
11	k	29	C	47	U
12	l	30	D	48	V
13	m	31	E	49	W
14	n	32	F	50	X
15	o	33	G	51	Y
16	p	34	H	52	Z
17	q	35	I		
18	r	36	J		

■ APPROVALS

RALTRON	
Created by, date:	KJackson, August 10, 2017
Eng. approval, date:	JIvens, August 10, 2017
Revision: A B	Initial Release CP, November 17, 2021 Updated to the current spec level

Raltron Electronics / RAMI Technology USA, LLC, including its affiliates, employees, agents and other persons acting on its behalf (collectively Raltron/RAMI Tech), disclaim any and all liability for any errors or inaccuracies contained in this data sheet. While Raltron/RAMI Tech has made every reasonable effort ensure the accuracy of all product information, specifications and data contained herein, Raltron/RAMI Tech does not guarantee that the information is accurate, reliable or current. The product information is provided only for reference purposes only and is subject to change, correction or revision, at any time without notice. Raltron/RAMI Tech does not assume any liability arising out of an application or use of any product described herein and disclaims any warranties expressed or implied. The user of products in such applications shall assume all risks of such use and will agree to hold Raltron/RAMI Tech, harmless against all damages.

Copyright © 2016, Raltron Electronics / RAMI Technology USA, LLC. All rights reserved. No part of this document may be reproduced in any form without the prior written permission of Raltron Electronics / RAMI Technology USA, LLC.