
RWS-374 RF MODULE Series

Wireless Hi Sensitivity Receiver Module (RF ASK)

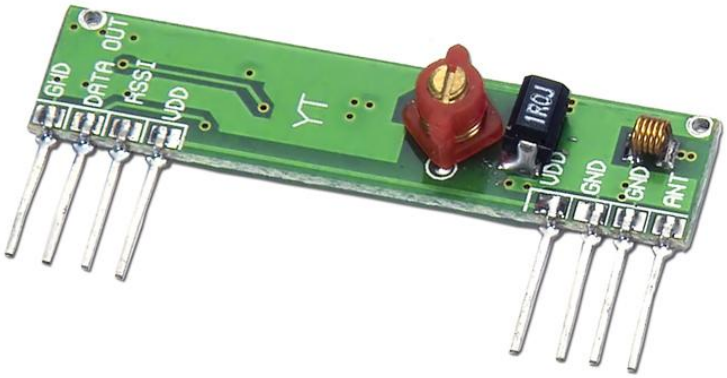

WENSHING Confidential
Do Not Distribute

Version History

Version	Date	Changes
V1.01	Mar.7, 2004	1st. Edition
V1.02	Jul.2,2008	2nd. Edition

Model: RWS-374-3

- Frequency Range: 315MHz
- Modulate Mode: ASK
- Circuit Shape: LC
- Date Rate: 4800 bps
- Selectivity: -108 dBm
- Channel Spacing: ±500KHz
- Supply Voltage: 5V
- High sensitivity passive design
- Simple to apply with low external count


Electrical Characteristic

Characteristic	Sym	Min	Type	Max	Unit
Operating Radio Frequency	FC	314.500	315.000	315.500	MHz
Sensitivity	Pref.	-106	-108	-110	dBm
Channel Width		-500		+ 500	KHz
Noise Equivalent BW	NEB		5	4	
Baseboard Data Rate				3	KB/S
Receiver Turn On Time				3	ms

DC Characteristic


Symbol	Parameter	Condition	Min	Type	Max	Unit
Vcc	Operating Supply Voltage		4.9	5	5.1	
I Tot	Operating Supply Voltage			4.5		
V Data	Data Out	1 Data=+200uA (High)	Vcc -0.5	Vcc		V
		1 Data=-10uA (Low)			0.3	V

Size

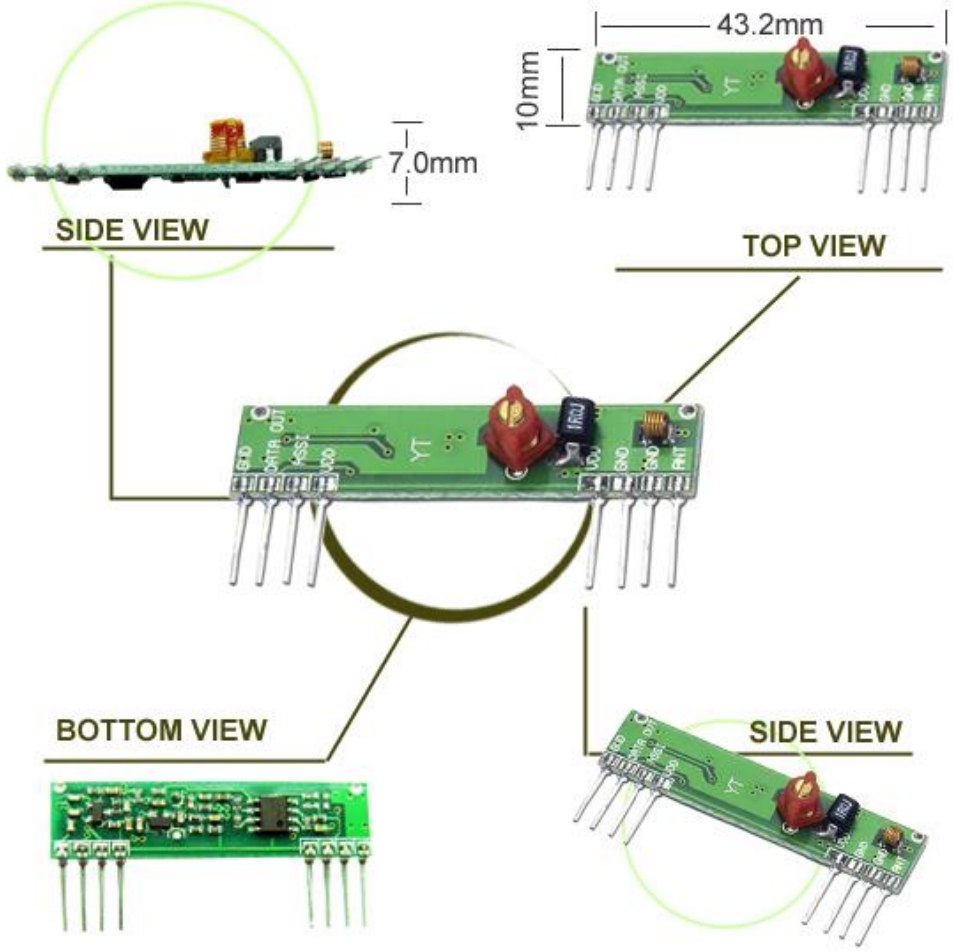


Pin Assignment

Pin	Function
1	GND
2	Digital Output
3	Linear Out
4	VCC
5	VCC
6	GND
7	GND
8	ANT(About 13cm)

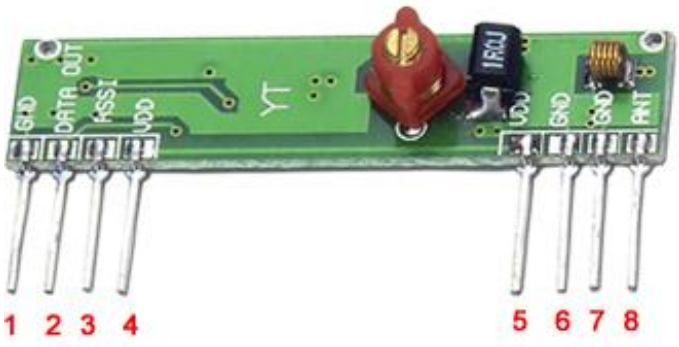

Demo Circuit

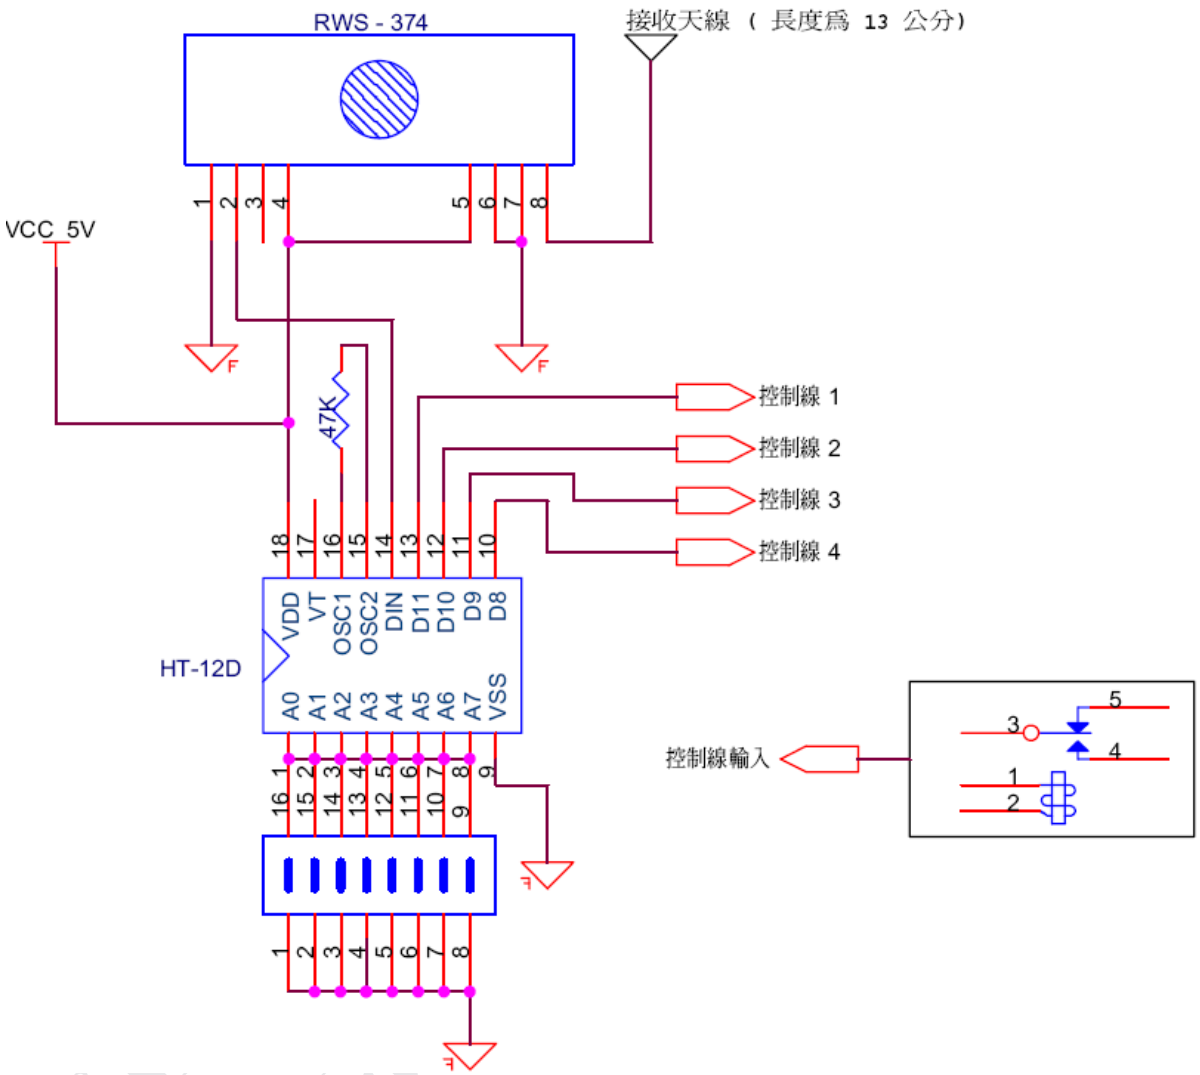

Do Not