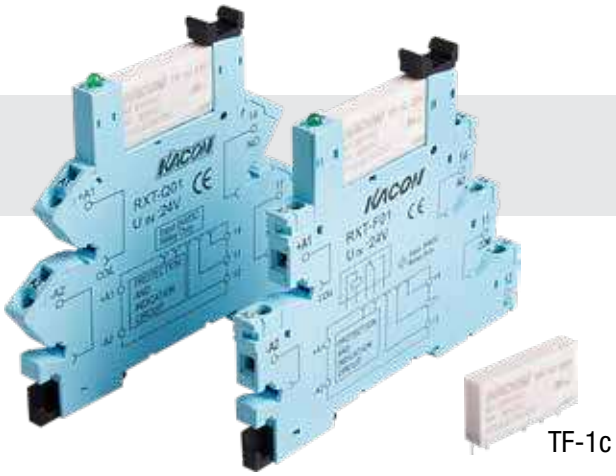


TF-1c

RXT Series

Relay Terminal Blocks

Ordering Information

RXT - ①

① Description	
	F01
	Q01

Relay Specifacations (TF-1c)

Contact Ratings	Contact Form		1N/O + 1N/C
	Contact Material		Silver Alloy
	Maximum Contact Resistance		30mΩ
	Rated Current (Resistance Load)		6A 250VAC , 6A 30VDC
	Maximum Contact Capacity	DC	180W
		AC	1500VA
	Maximum Rated Voltage		6A 250VAC
	Minimum Switching Current		1mA 5VDC
Coil Ratings	Coil Voltage		5V 12V 24V
	Coil Consumption		170mW 24VDC
	Minimum Pick Up Voltage		70% of Nominal Voltage
	Maximum Drop-Out Voltage		5% of Nominal Voltage
General Ratings	Operating Time	Pick-up	8ms
		Drop-out	4ms
	Insulation Resistance		100MΩ
	Dielectirc Strength	Btwn Contacts and Coil	4000VAC 1 minute
		Btwn Contacts	1000VAC 1 minute
	Life Cycles	Mechanical	Min. 10,000,000
		Electrical	Min. 100,000
	Vibration Resistance		10Hz to 55HZ 1mm DA
	Ambient Temperature		-40°C to 85°C
	Ambient Humidity		5% to 85% RH
	Weight		Approx. 3g
	Approval		CE , VDE , UL




RXT-QS (Jumper)

Dimensions

unit: mm

RXT – F01 screw type

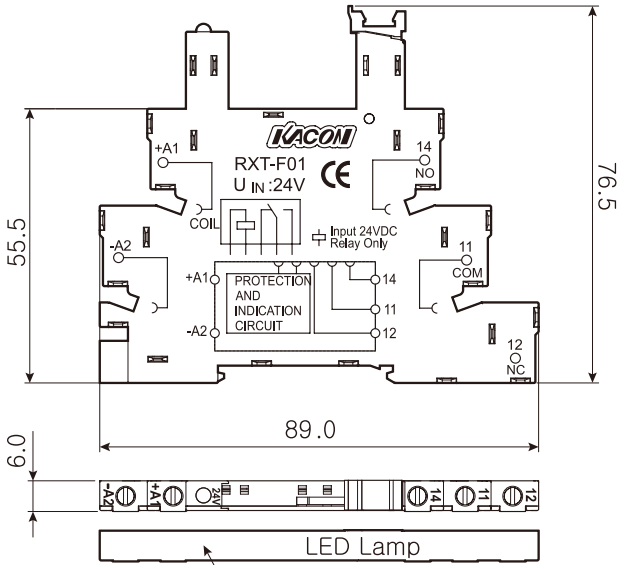

RXT – Q01 pin type

