Clairitec

HMI Solution & Graphic Products



Specifications

Intelligent Display 9”

Resistive Touch panel

Contents

CHAPTER 1: VERSIONS HISTORY 2

CHAPTER 2: GENERAL DESCRIPTION 3

CHAPTER 3: SPECIFICATION OF THE INTELLIGENT DISPLAY 3

MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS 3

FUNCTIONAL CHARACTERISTICS 3

CHAPTER 4: DESCRIPTION OF CONNECTIONS 4

CONNECTOR N°1: USB HOST 4

CONNECTOR N°2: RS232 TTL OR CAN 5

CONNECTOR N°3: RS232 PC 5

CHAPTER 5: MECHANICAL DESCRIPTION 6

CHAPTER 6: CLAIRITEC'S CONTACT 7

Chapter 1: Versions history

Reference	Modifications	Date
DOC-20141125-1L-UK	Add video connectors reference for real time video versions	10/04/2019
DOC-20130731-1K-UK	Company and contact information	27/08/2017
DOC-20130731-1J-UK	Add inrush current and update power supply	25/08/2017
DOC-20130731-1I-UK	Mechanical description modification	02/07/2015
DOC-20130731-1H-UK	Add horizontal / vertical flip	23/06/2014
DOC-20130731-1G-UK	Add storage temperature	29/04/2014
DOC-20130731-1F-UK	Update connectors description	12/03/2014
DOC-20130731-1E-UK	Update power supply and maximum consumption	23/09/2013
DOC-20130731-1D-UK	Check and remove preliminary version. Change mechanical dimension of touch panel and thickness.	10/09/2013
DOC-20130731-1C-UK	Connectors description	02/09/2013
DOC-20130731-1B-UK	Mechanical description	31/08/2013
DOC-20130731-1A-UK	Creation	31/07/2013

Classification: CONFIDENTIAL | *Copy or communication inhibited without written authorization from Clairitec*

Chapter 2: General description

The Intelligent Display is a "Plug & Play" graphic module display developed & produced in France.

It consists of a TFT-LCD 9 "WVGA (800 x 480 pixels) touchscreen display with integrated HMI board from CLAIRITEC® and a metal protective cover.

The Intelligent Display is EMC compliant and withstands a temperature range from -20°C to +70°C.

It can fit easily into electronic equipment thanks to its 4 fixing points.

Chapter 3: Specification of the intelligent display

MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Item	Specifications
Size	9'' Diagonal
Resolution	800 x RGB x 480 dots (WVGA)
Viewing direction	6 o'clock
Viewing area	198.0 (W) x 111.7 (H) mm
Horizontal / Vertical flip	Available
Backlight	White LED
Brightness	400 cd/m^2
Viewing angle (typ.)	120° Vertical / 140° Horizontal
Touch screen	4-wire resistive
Operating temperature	-20°C ~ +80°C
Storage temperature	-30°C ~ +80°C
EMC compliant	NF-EN55022 class B (Frequency range 150 kHz to 2 Ghz) NF-EN61000-4-2 (8 kV contact discharge / 15 kV air discharge) NF-EN61000-4-3 (Frequency range : 30 Mhz to 1 Ghz – 10 V/m)
Outline dimension	233.1 (W) x 126.5 (H) x 20 (D) mm
Weight	657 g. for stainless steel protective cover

FUNCTIONAL CHARACTERISTICS


Item	Specifications
Color LCD Management	262k colors (display) – 16M (controller) TFT transmissive active matrix
Touchscreen Management	Advanced clicking area processing
Graphic Engine	Advanced display algorithms
Graphic pages Management	Two pages dynamically managed
Storage Memory	32 Mb
Graphical Layout Management	GraphConverter®3 software tool enables you to build your HMI's graphic library and upload it in the board flash memory
Communication Bus	RS232 serial (9600bds to 355Kbds) CAN 2.0B (100Kbds to 500Kbds) USB
Power Supply	5V (+/-2%) or 6-36V +/- 5%
Inrush current (5V version only)	1.5A / 500us
Maximum Consumption	7W

Classification: CONFIDENTIAL | ***Copy or communication inhibited without written authorization from Clairitec***

Chapter 4: Description of connections


The Clairitec Intelligent Display has three communication connectors as shown in the photo below:

Connector N°1
USB
Connector N°2
RS232 TTL / CAN
Connector N°3
RS232 PC

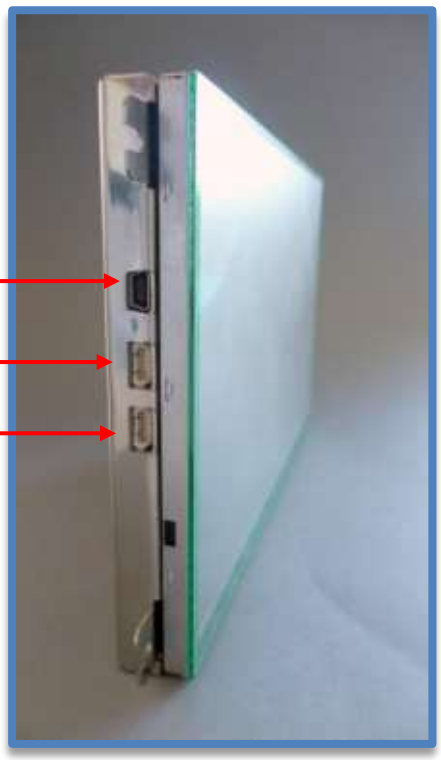

CONNECTOR N°1: USB

This connector allows you to update firmware, and the graphics chart via a computer or a USB key. Thanks to its transfer via USB, the loading time is decreased. Requires a standard adapter USB -> mini USB, available in the starter kit.



Pin number	I/O	Description
1	Power	Power Supply +5V / 500mA max
2	I/O	USB -
3	I/O	USB +
4	-	Reserved
5	Power	GND

Classification: CONFIDENTIAL ***Copy or communication inhibited without written authorization from Clairitec***


CONNECTOR N°2: RS232 TTL OR CAN

Connection Interface for serial communication EIA / RS232E or CAN2.0B between the Clairitec HMI board and your application board.

→ Update the firmware with the RS232 SpiderGraph protocol,
→ Update your graphic chart with the RS232 SpiderGraph protocol,
→ Send and receive commands with the RS232 or Can2.0B SpiderGraph protocol.

PCB base reference: Wurth: 653105131822
Molex: 53261-0571

Matting model: Wurth: 653005113322
Molex: 51021-0500

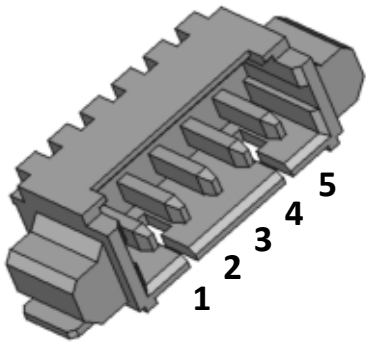

Pin number	I/O	Description
1	Power	Power Supply +12V
2	Power	GND
3	I/O	RS232 TTL TX or CAN H
4	I/O	RS232 TTL RX or CAN L
5	Power	GND


CONNECTOR N°3: RS232 PC

Connection Interface for serial communication EIA / RS232E between the Clairitec HMI board and your application board.

→ Update the firmware with the RS232 SpiderGraph protocol,
→ Update your graphic chart with the RS232 SpiderGraph protocol,
→ Send and receive commands with the RS232 SpiderGraph protocol.

PCB base reference: Wurth: 653105131822
Molex: 53261-0571

Matting model: Wurth: 653005113322
Molex: 51021-0500

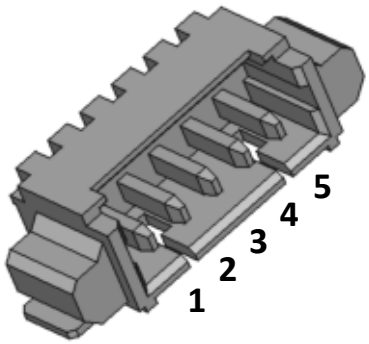

Pin number	I/O	Description
1	Power	Power Supply +12V
2	Power	GND
3	O	RS232 TX (EIA/232)
4	I	RS232 RX (EIA/232)
5	Power	GND

Classification: CONFIDENTIAL
Copy or communication inhibited without written authorization from Clairitec

CONNECTOR N°4: ONLY FOR REAL TIME VIDEO VERSIONS

Connection interface for real time analogic video streaming (NTSC or PAL).






PCB base reference: Samtec: MCX7–J–P–H–ST

Matting model: Samtec: RF179 + 75 ohm cable
https://www.samtec.com/products/rf179

Classification: CONFIDENTIAL | ***Copy or communication inhibited without written authorization from Clairitec***

Chapter 5: Mechanical description

Unit: mm

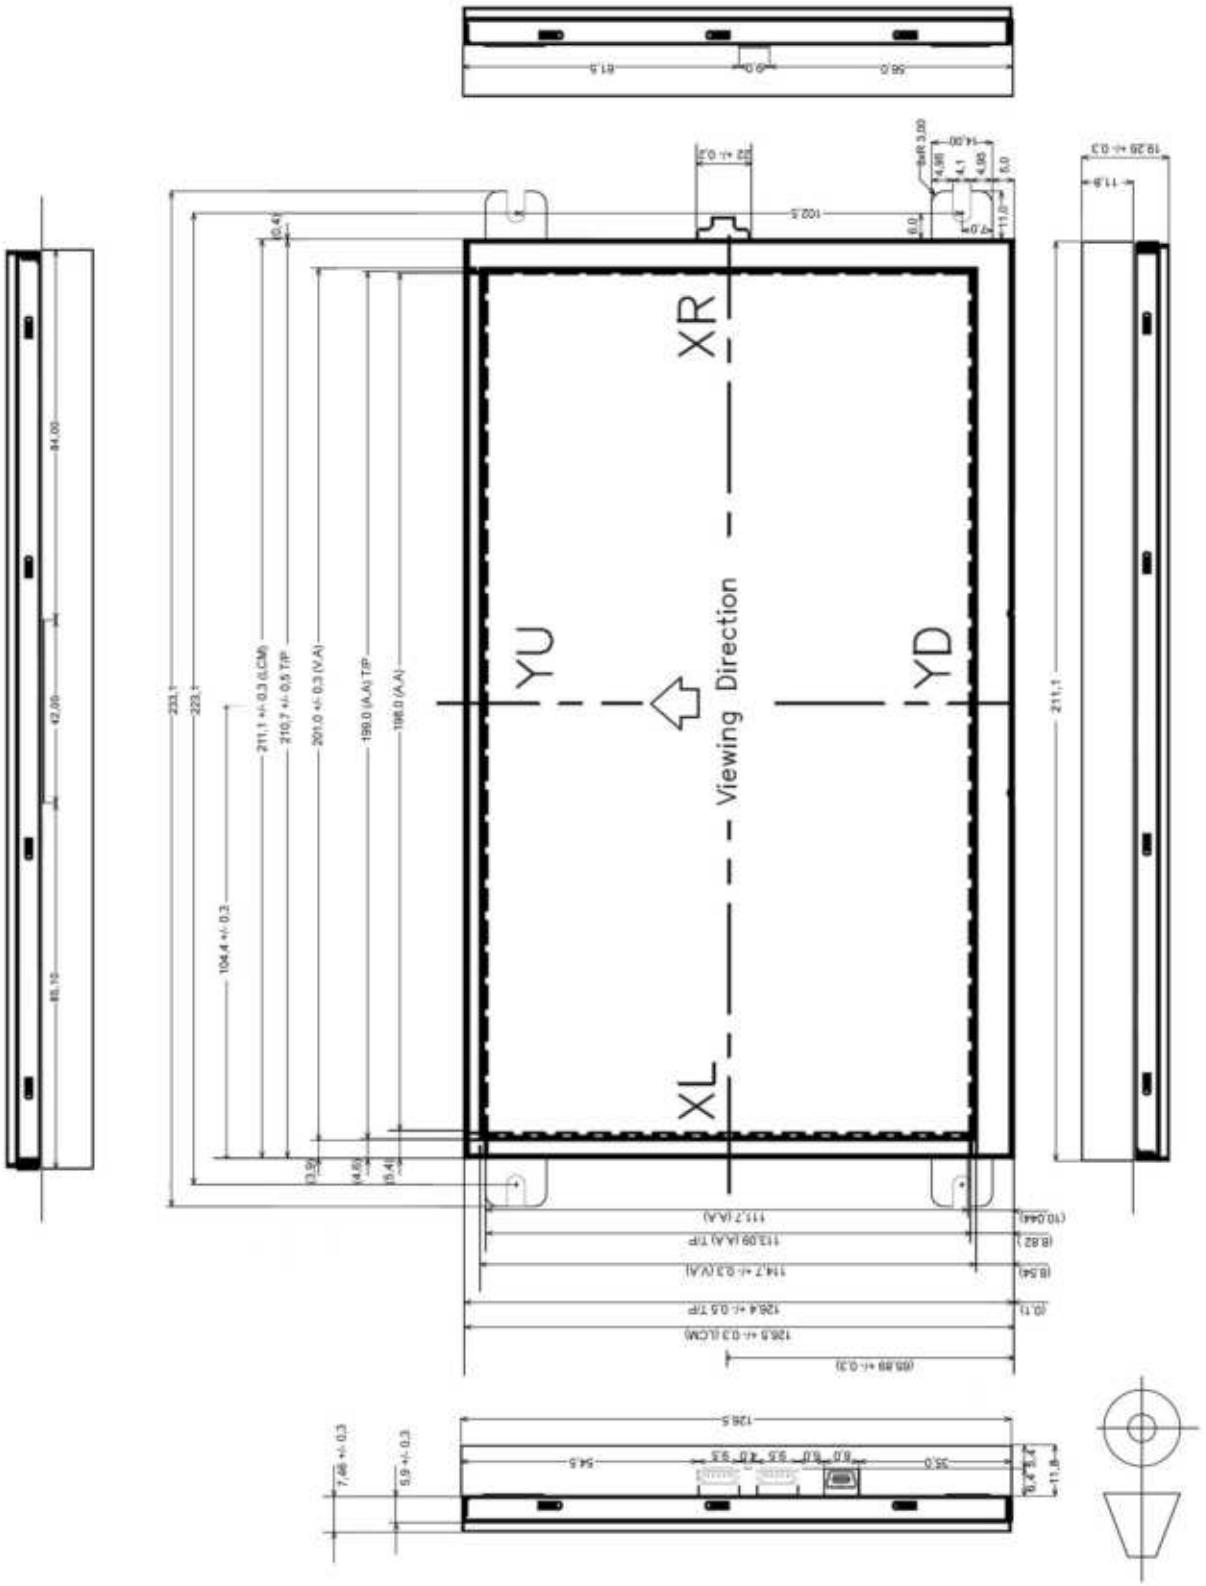

Chapter 6: Clairitec's contact

Clairitec

CLAIRITEC
11 avenue Henri Becquerel
33700 Mérignac
FRANCE

Web site: www.clairitec.com

Clairitec services

Customer relation service: contact@clairitec.com

Technical support service: support@clairitec.com

Non-contractual pictures

Copy or communication inhibited without written authorization from Clairitec

Clairitec

11, avenue Henri Beauerel - 33700 - MERIGNAC - FRANCE

Email: contact@clairitec.com
www.clairitec.com