SAV7 Series Anti-vandal Switch



Applications / Markets


Audio / Visual


Security Devices


Industrial Controls


Kiosks


Electrical Housewares


Medical Equipment

c UL us RoHS

Specifications

Electrical Rating: 15A, 125/250VAC
Electrical Life: 10,000 Cycles
Contact Resistance: 100mΩ max,
Insulation Resistance: 100MΩ @ 500VDC
Dielectric Strength: 1,500VAC for 60 seconds
Operating/Storage Temperature: -25°C to 85°C
Travel: 3.2mm
Moisture Protection: IP67 (at front panel)
Actuation Force: 3.5N
Panel Thickness: 1-10mm
Hex Nut Torque: 1-3Nm

Features & Benefits

- **22mm diameter panel cutout**
- **Ring or ring/power illumination options**
- **Multiple illumination voltage options**
- **Momentary and latching functions**
- **15A high current rating**


Part Number Configurator

Series	Actuator	Terminal	Function	Body Finish	Actuator Finish	Lens Style	LED Color	Illumination Voltage
SAV7	**F** - Flat	**1** - 4.8mm Quick Connect	**3** - 1P ON-ON **B** - 1P ON-(ON)*	**S** - Stainless Steel **1** - Black Anodized	**S** - Stainless Steel **1** - Black Anodized	**None** - Non-Illuminated **3** - Ring, moveable with actuator **6** - Ring / Power Symbol moveable with actuator	**None** - Non-Illuminated **0** - White **1** - Red **2** - Orange **3** - Green **4** - Blue **5** - Yellow **G** - Red / Green **P** - Green / Yellow	**None** - Non-Illuminated **1** - 3V **3** - 6V **4** - 12V **5** - 24V **6** - 110V **7** - 220V


NOTES:
*( ) denotes function is momentary
Call us for custom graphic options 800-867-2717

Specifications subject to change without notice 8.14.2019


BODY DIMENSIONS

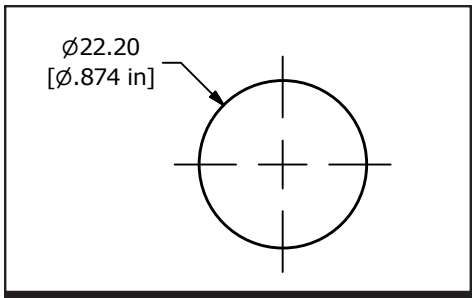


RECOMMENDED PANEL CUTOUT

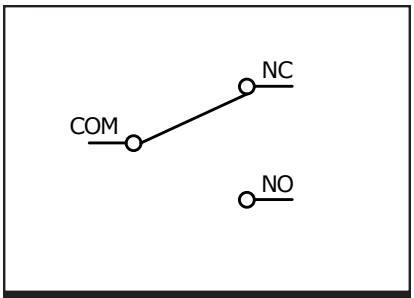



NON ILLUM SCHEMATIC

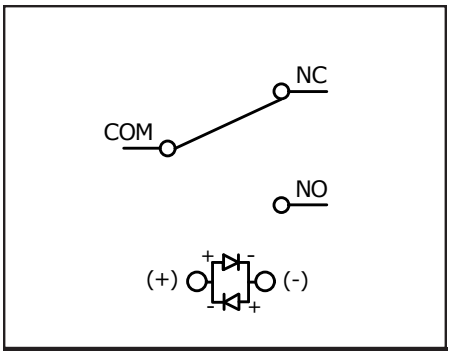


LED SCHEMATIC

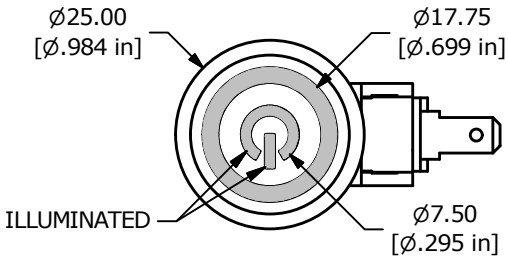

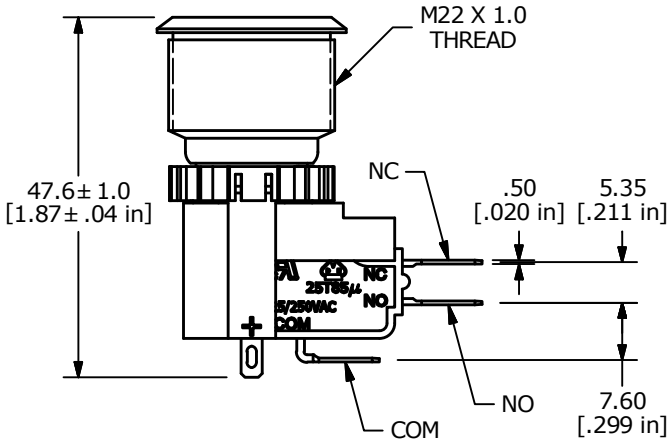

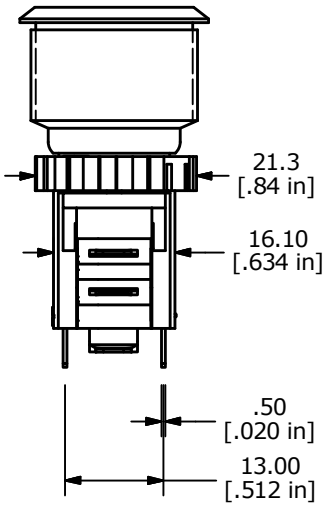


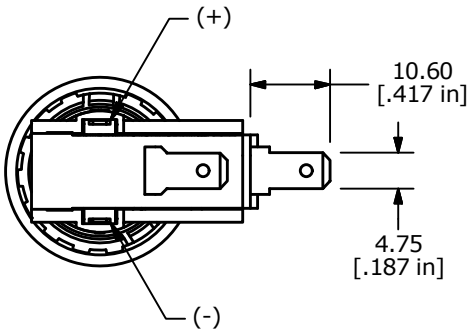


ILLUMINATED RING / POWER SYMBOL OPTION SHOWN

LED (+) AND (-) TERMINALS ARE NOT INCLUDED ON THE NON-ILLUMINATED OPTION


Lens Sytle Options

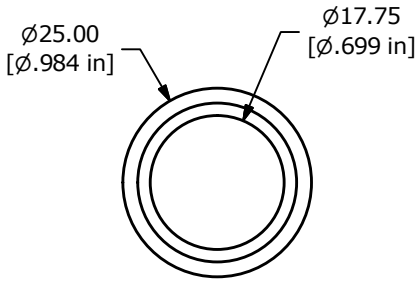

Non-Illuminated

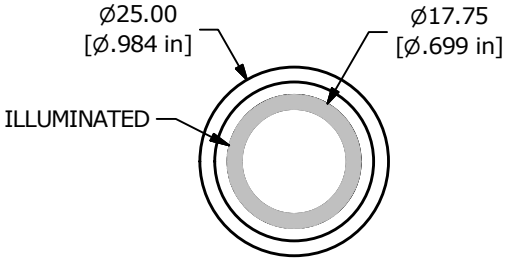

Ring Illuminated

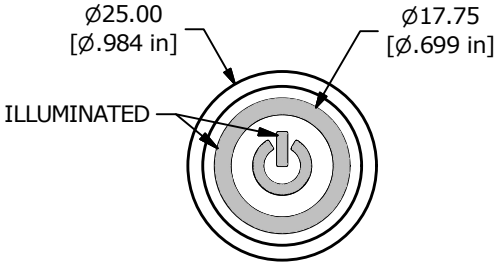

Ring / Power Symbol
Illuminated