



REV.	ECN NO.	DATE	SIGN	DESCRIPTION

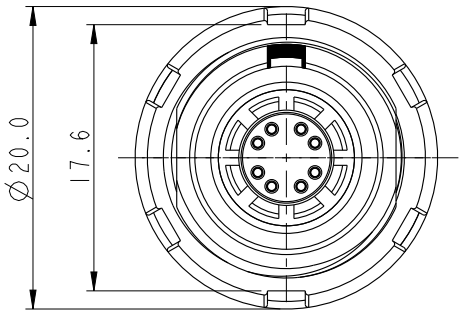


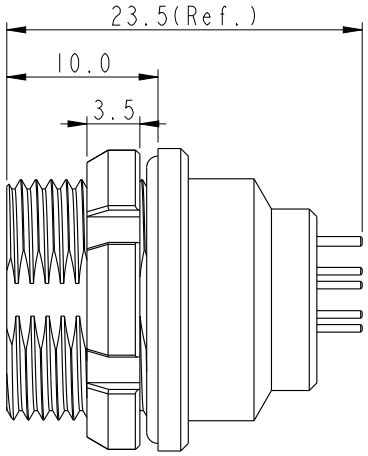

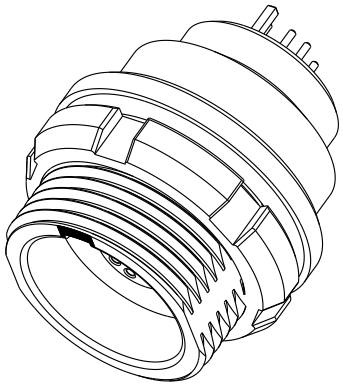


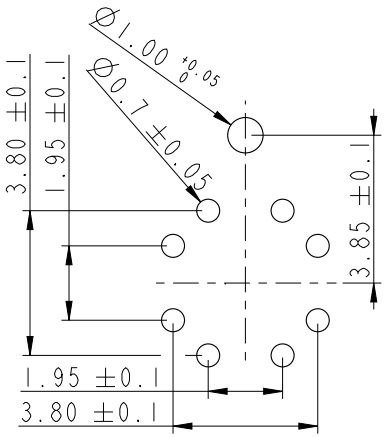

PCB Layout

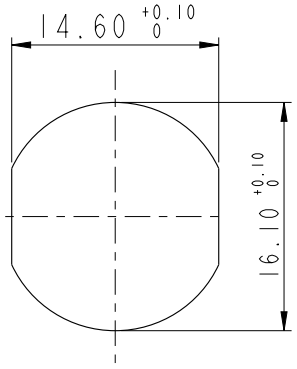

Recommended panel Cut-out

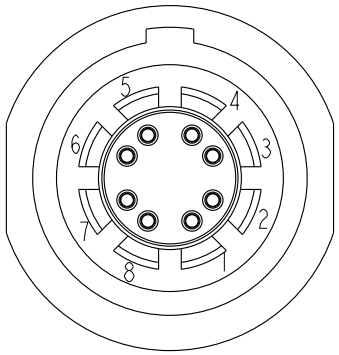

Pin Assignments
Front View

Note:
* RoHS Compliant
* (QC) Important Dimension
* Waterproof Rate: IPX8, Unmated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper Alloy, Gold Plated
  O-Ring: Rubber, Black
* Shield: Metal
* Nut: Metal
*O-Ring: Rubber, Red
* For Panel Thickness Max 5.0mm
* O-Ring and nut are assembled on connectors

UNIT: mm

TOLERANCE
±0.5mm

TITLE: FLO C SIZE CAT 6A PANEL 8P

SCALE	SIZE	SHEET
1:1	A4	1 OF 1

REV.	WC-REV.	
A	.0	(QC): Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
SLKC-A08EEFP-GCP-001	Ouyang	2021-09-08
DWG NO	CHECKED BY	DATE
SLKC-A08EEFP-GCP-001	Jerry	2021-09-08
CUSTOMER	APPROVED BY	DATE
ALTW	Fred	2021-09-08

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.