


NOTES:
1. COMPONENTS SHIPPED NON-ASSEMBLED.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	Engineering Release	9/14/2009	T.Y.
B	Updated Table For Length "L"	11/14/2012	T.Y.
C	ECO-1241: Updated Recommended Mounting Holes	5/9/2024	A.V.

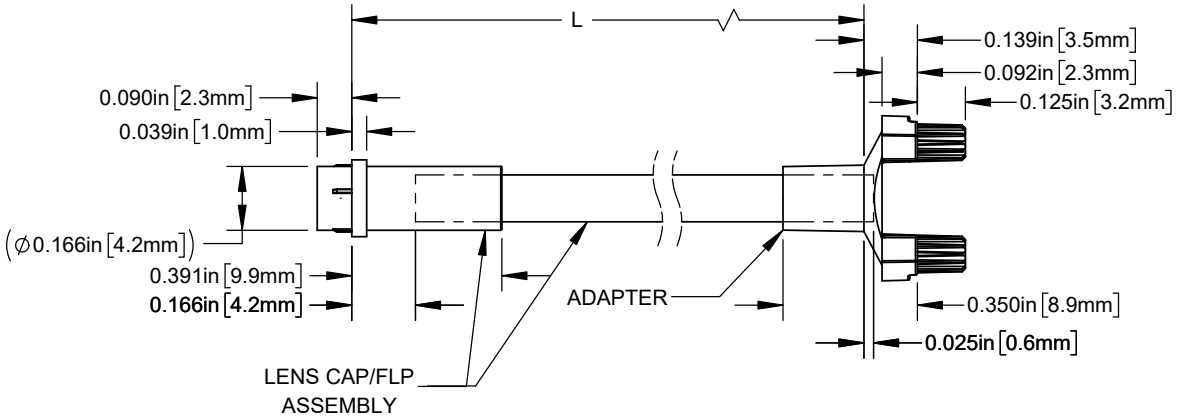




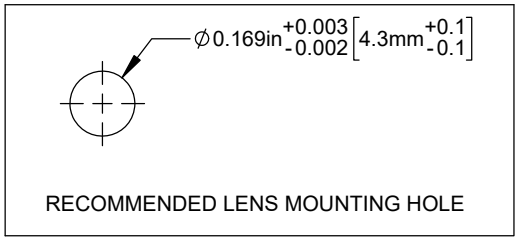


RECOMMENDED LENS MOUNTING HOLE

TABLE 1 - LENGTH	
LENGTH (L)*	TOLERANCE
1.00" - 16.00"	±0.05"
16.1" - 40.00"	±0.15"
40.1" - 80.00"	±0.30"
80.1" - 3,940.00"	±0.5%

*AVAILABLE IN 0.1" INCREMENTS

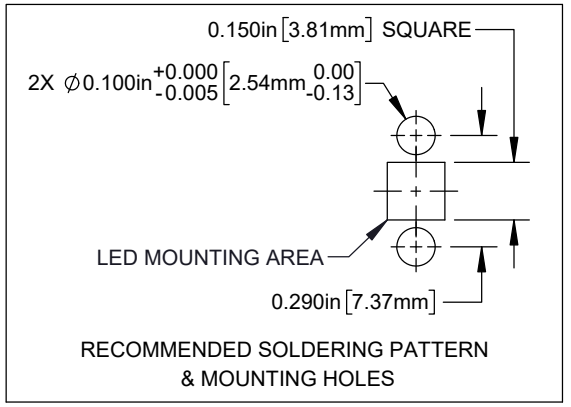

RECOMMENDED SOLDERING PATTERN & MOUNTING HOLES

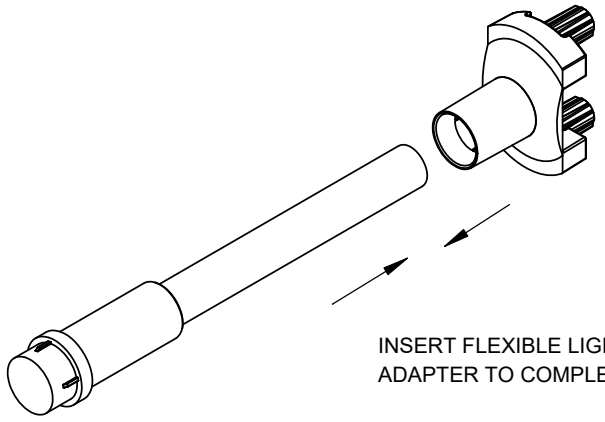
INSERT FLEXIBLE LIGHT PIPE INTO ADAPTER TO COMPLETE ASSEMBLY

CUSTOMER USE DRAWING

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)
DECIMALS: .X ± .1; .XX ± .02; .XXX ± .010
ANGULAR: X° ± 1°

BIVAR®
4 THOMAS, IRVINE, CA. 92618
TEL: (949) 951-8808 FAX: (949) 951-3974

TITLE: FLP ASSEMBLY WITH SMFLP ADAPTER, FLAT FACE			
DESIGNED: K. BARON	DATE: 9/14/2009	DRAWING NO: SMFLP2F-X.X	REVISION: C
REVISED: K. BARON	DATE: 5/9/2024	SHEET SIZE: A	CAGE CODE: 32559
CHECKED: A. VALDEZ	DATE: 5/9/2024	SCALE: 2:1	SHEET # 1 OF 1
		CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING	