Ordering number : ENN2563C

ON Semiconductor®

ON Semiconductor
DATA SHEET

2SK669

N-Channel Enhancement Silicon MOSFET

Very High-Speed Switch,Analog Switch Applications

Applications

· Analog switches, low-pass filters, Ultrahigh-speed switches.

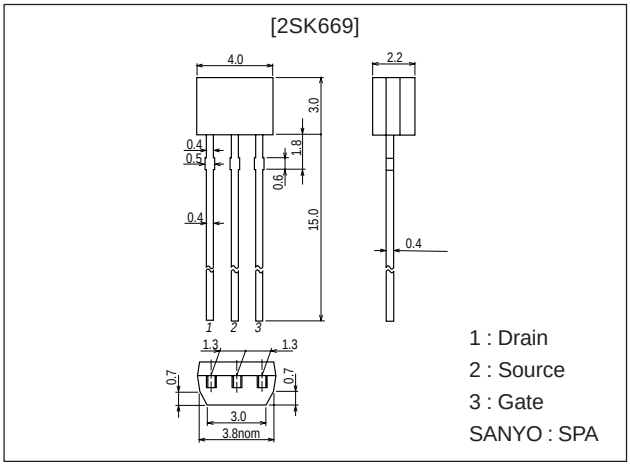
Features

· Large $|y_{fs}|$.
· Enhancemet type.
· Small ON resistance.

Package Dimensions

unit:mm

2040A



Specifications

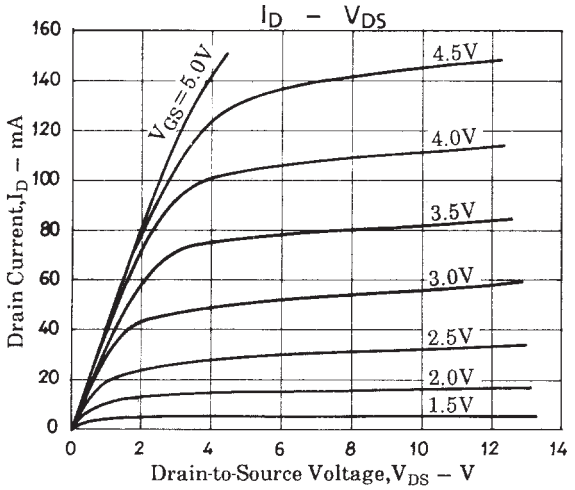
Absolute Maximum Ratings at Ta = 25˚C

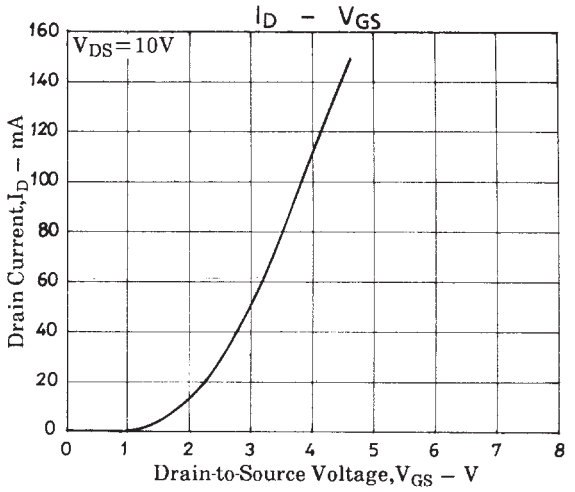
Parameter	Symbol	Conditions	Ratings	Unit
Drain-to-Source Voltage	V_{DS}		50	V
Gate-to-Source Voltage	V_{GS}		±12	V
Drain Current	I_D		100	mA
Drain Current(Pulse)	I_{DP}		300	mA
Allowable Power Dissipation	P_D		200	mW
Channel Temperature	Tch		125	˚C
Storage Temperature	Tstg		–55 to +125	˚C

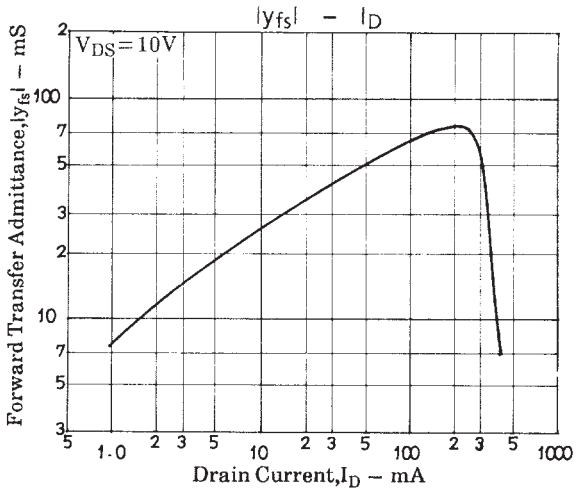
Electrical Characteristics at Ta = 25˚C

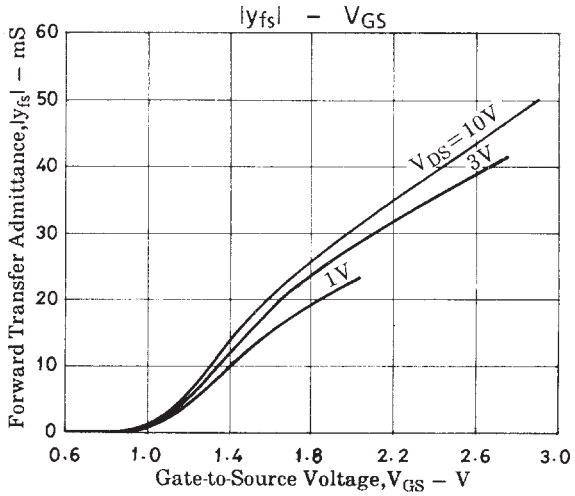
Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Drain-to-Source Voltage	$V_{(BR)DS}$	I_D=10μA, V_{GS}=0	50			V
Gate-to-Source Leakage Current	I_{GSS}	V_{GS}=10V, V_{DS}=0		0.01	10	nA
Zero-Gate Voltage Drain Current	I_{DSS}*	V_{DS}=20V, V_{GS}=0V			1.0	μA
Cutoff Voltage	$V_{GS(off)}$	V_{DS}=10V, I_D=100μA	0.3	0.9	1.5	V
Forward Transfer Admittance	| yfs |	V_{DS}=10V, I_D=50mA, f=1kHz	25	40		mS
Input Capacitance	Ciss	V_{DS}=10V, V_{GS}=0, f=1MHz		15		pF
Output Capacitance	Coss	V_{DS}=10V, V_{GS}=0, f=1MHz		6		pF
Reverse Transfer Capacitance	Crss	V_{DS}=10V, V_{GS}=0, f=1MHz		0.5		pF
Drain-to-Source ON Resistance	$R_{DS(on)}$	V_{DS}=10V, I_D=10mA		20		Ω

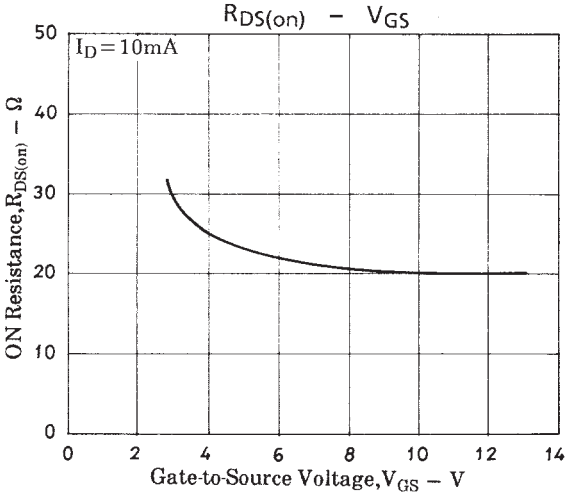
© 2011, SCILLC. All rights reserved.

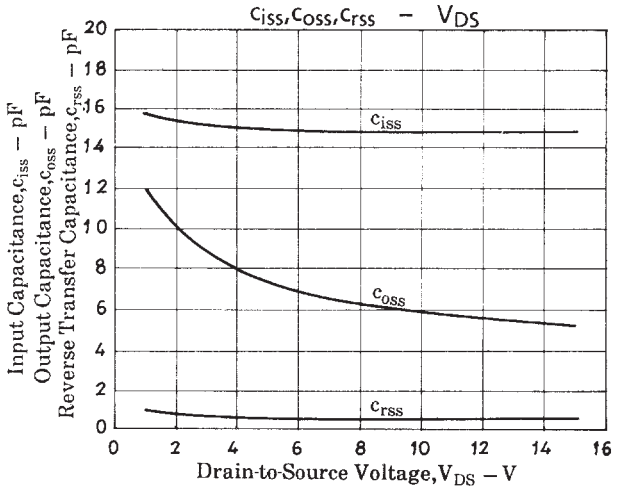

I_D – V_{DS}
V_{GS}=5.0V
4.5V
4.0V
3.5V
3.0V
2.5V
2.0V
1.5V
Drain Current,I_D – mA
Drain-to-Source Voltage,V_{DS} – V


I_D – V_{GS}
V_{DS}=10V
Drain Current,I_D – mA
Drain-to-Source Voltage,V_{GS} – V


|y_{fs}| – I_D
V_{DS}=10V
Forward Transfer Admittance,|y_{fs}| – mS
Drain Current,I_D – mA


|y_{fs}| – V_{GS}
V_{DS}=10V
3V
1V
Forward Transfer Admittance,|y_{fs}| – mS
Gate-to-Source Voltage,V_{GS} – V


$R_{DS(on)}$ – V_{GS}
I_D=10mA
ON Resistance,$R_{DS(on)}$ – Ω
Gate-to-Source Voltage,V_{GS} – V


C_{iss},C_{oss},C_{rss} – V_{DS}
C_{iss}
C_{oss}
C_{rss}
Input Capacitance,C_{iss} – pF
Output Capacitance,C_{oss} – pF
Reverse Transfer Capacitance,C_{rss} – pF
Drain-to-Source Voltage,V_{DS} – V

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. SCILLC strives to supply high-quality high-reliability products and recommends adopting safety measures when designing equipment to avoid accidents or malfunctions. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals," must be validated for each customer application by customer's technical experts. SCILLC shall not be held liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affi liates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affi rmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada.
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5773-3850

ON Semiconductor Website:www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative