NextGen Components,Inc.

PART CODE: SOD5235Z3V3S3C

SPECIFICATION SHEET

SPECIFICATION SHEET NO.	N1004- SOD5235Z3V3S3C
DATE	Oct. 04, 2021
REVISION	A0
DESCRIPITION	SMD Plastic-Encapsulate ESD Protection Diodes, SOD-523 series, 2 pads ESD5Z3.3C Type, TVs for ESD protection Reverse Working Voltage: 3.3V, Clamping Voltage 6.5VC Max. Operating Temp. Range -40°C ~+150°C, Package in Tape/Reel, 3000pcs/Reel RoHS/RoHS III compliant
CUSTOMER	
CUSTOMER PART NUMBER	
CROSS REF. PART NUMBER	
ORIGINAL PART NUMBER	MDD ESD5Z3.3C
PART CODE	SOD5235Z3V3S3C

VENDOR APPROVE
Issued/Checked/Approved Mandy Xu · Ruby Zhang · Jack Zhang (NextGen Components, Inc.)
DATE: Oct. 04, 2021

CUSTOMER APPROVE
DATE:

NextGen Components,Inc.

PART CODE: **SOD5235Z3V3S3C**

SMD ESD PROTECTION DIODES SOD-523 SERIES

MAIN FEATURE

- IEC61000-4-2 (ESD) +/-30KV (Air); +/-30KV (Contact)
- IEC61000-4-4 (EFT) 40A (5/50ns)
- Peak power dissipation: 60W (8/20μs)
- Protects one directional I/O line
- Low clamping voltage
- Working voltages : 3.3V
- Low Leakage Current

APPLICATION

- High speed line: USB 1.0/2.0, VGA, DVI, SDI
- Serial and Parallel Port
- Notebooks, Desktops, and Servers Cellular
- Handsets and Accessories
- Portable Instrumentation
- Peripherals & Projection TV

RFQ
Request For Quotation

PART CODE GUIDE

SOD523	5Z3V3	S	3C
1	2	3	4

1) **SOD523:** SMD Plastic-Encapsulate ESD Protection Diodes, SOD-523 series, 2 pads

2) **5Z3V3:** Type code for original part number ESD5Z3.3

3) **S**: Package code, Package in Tape/Reel, 3000pcs/Reel

4) **3C:** Marking code for "3C □" on the case surface, Different Marking for different specification.

SMD ESD PROTECTION DIODES SOD-523 SERIES


DIMENSION (Unit: Inch/mm)


Image for reference




Marking: 3C ∞

SOD-523

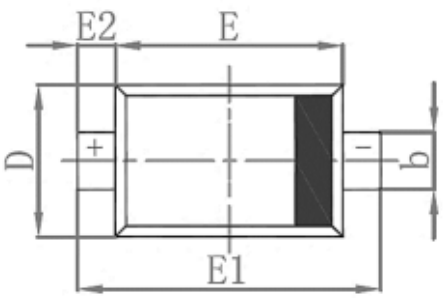







Symbol	Value (mm)		
	Min.	Typ.	Max.
A	0.51		0.770
A1	0.50		0.70
b	0.250		0.350
c	0.080		0.150
D	0.750		0.850
E	1.10		1.30
E1	1.50		1.70
E2	0.20 Ref.		
L	0.010		0.070
K	7° Ref.		

Recommend Pad Layout



Circuit Diagram



SMD ESD PROTECTION DIODES SOD-523 SERIES

MECHANICAL DATA

Case	Terminals	Flammability Rating	Mounting Position	Weight per piece
JEDEC SOD-523 molded plastic body	Gold plated, solderable per MIL-STD-750,Method 2026	UL 94V - 0	-	-

ABSOLUTE MAX. RATINGS AT Ta=25 °C (unless otherwise specified)

Parameter	SYMBOLS	VALUE	UNITS
		LIMIT	
ESD per IEC 61000-4-2 (Air)	V_{ESD}	+/-30	KV
ESD per IEC 61000-4-2 (Contact)	V_{ESD}	+/-30	KV
Peak Pulse Power (8/20μs)	P_{PP}	60	W
Operating Temperature Range	T_J	-40 ~+ 150	°C
Storage Temperature Range	T_{STG}	-40 ~ +150	°C
Lead Solder Temperature- Max. (10 s Duration)	T_L	260 /10s	°C


ELECTRICAL CHARACTERISTICS (Ta=25 °C unless otherwise specified)

Parameter	SYMBOLS	VALUE			UNITS
		Min.	Typical	Max.	
Reverse Working Voltage	V_{RWM}			3.3	V
Reverse Breakdown Voltage @ I_T = 1.0mA	V_{BR}	3.6			V
Reverse Leakage Current @V_{RWM} = 3.3V,	I_R			1.0	μA
Clamping Voltage @ I_{PP} = 1.0A, t p = 8/20μs	V_C			6.5	V
Clamping Voltage @ I_{PP} = 5.0A, t p = 8/20μs	V_C			12.0	V
TLP Clamping Voltage @ I pp =16.0A, IEC61000-4-2 Level 4 equivalent (+/-8KV Contact, +/-15KV Air）	V_{CTLP}		9.0		V
Junction Capacitance @V_R =0V, f=1.0MHz	C_J			16.5	pF

RELIABILITY

Number	Experiment Items	Experiment Method And Conditions	Reference Documents
1	Solder Resistance Test	Test 260°C± 5°C for 10 ± 2 sec. Immerse body into solder 1/16" ± 1/32"	MIL-STD-750D METHOD-2031.2
2	Solderability Test	230°C ±5°C for 5 sec.	MIL-STD-750D METHOD-2026.1 0
3	Pull Test	1 kg in axial lead direction for 10 sec.	MIL-STD-750D METHOD-2036.4
4	Bend Test	0.5Kg Weight Applied To Each Lead, Bending Arcs 90 °C ± 5 °C For 3 Times	MIL-STD-750D METHOD-2036.4
5	High Temperature Reverse Bias Test	T_A=100°C for 1000 Hours at V_R=80% Rated V_R	MIL-STD-750D METHOD-1038.4
6	Forward Operation Life Test	TA=25°C Rated Average Rectified Current	MIL-STD-750D METHOD-1027.3
7	Intermittent Operation Life Test	On state: 5 min with rated IRMS Power Off state: 5 min with Cool Forced Air. On and off for 1000 cycles.	MIL-STD-750D METHOD-1036.3
8	Pressure Cooker Test	15 PSIG, T_A=121°C, 4 hours	MIL-S-19500 APPENOIXC
9	Temperature Cycling Test	-55°C~+125°C; 30 Minutes For Dwelled Time 5 minutes for transferred time. Total: 10 cycles.	MIL-STD-750D METHOD-1051.7
10	Thermal Shock Test	0°C for 5 minutes., 100°C for 5minutes, Total: 10 cycles	MIL-STD-750D METHOD-1056.7
11	Forward Surge Test	8.3ms Single Sale Sine-wave One Surge.	MIL-STD-750D METHOD-4066.4
12	Humidity Test	T_A=65°C, RH=98% for 1000 hours.	MIL-STD-750D METHOD-1021.3
13	High Temperature Storage life Test	150°C for 1000 Hours	MIL-STD-750D METHOD-1031.5

SUGGESTED REFLOW PROFILE (For Reference Only)

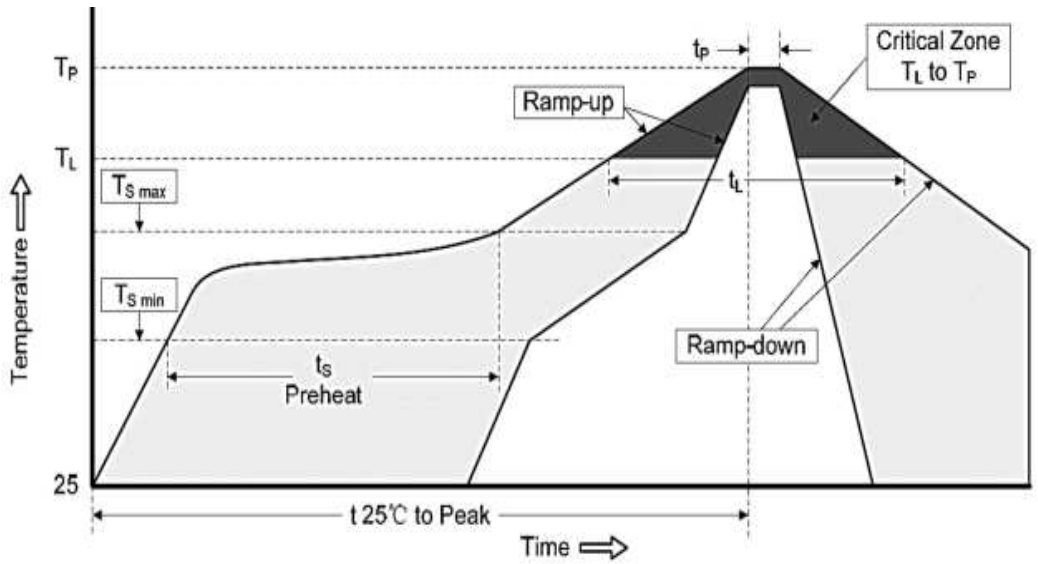

Profile Feature		Pb-Free Assembly
Average Ramp-up Rate (Ts Max to Tp)		3℃/second Max
Preheat	**Temperature Min (Ts Min.)**	150℃
	Temperature Max (Ts Max.)	200℃
	Time (ts Min. to ts Max.)	60 ~ 180 seconds
Time maintained above	**Temperature (TL)**	217℃
	Time (tL)	60 ~ 150 seconds
Peak/Classification Temperature (Tp)		260 ℃
Time within 5℃ of actual Peak Temperature (tp)		20 ~ 40 seconds
Ramp-down rate		6 ℃ /Second Max.
Time 25 ℃ to Peak Temperature		8 minutes Max.
Suggest reflow times		3 Times Max.

RATINGS AND CHARACTERISTIC CURVES (For Reference Only)

Fig 1 8/20μs Waveform per IEC61000-4-5

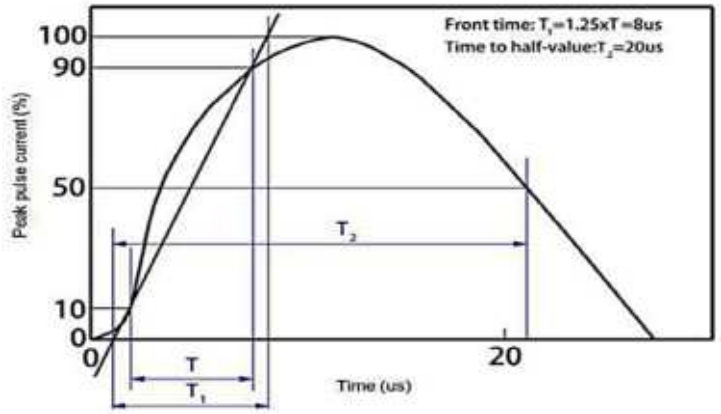


Fig 2 Contact Discharge Current Waveform per IEC 61000-4-2)


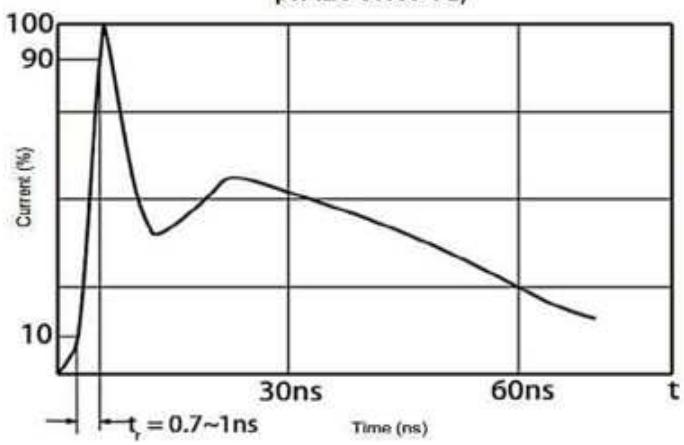


Fig 3 Power Derating Curve

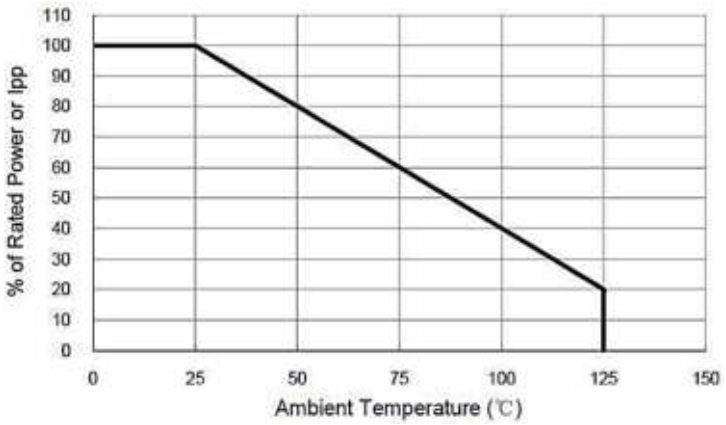

RATINGS AND CHARACTERISTIC CURVES (For Reference Only)

Fig 4 Voltage vs Capacitance

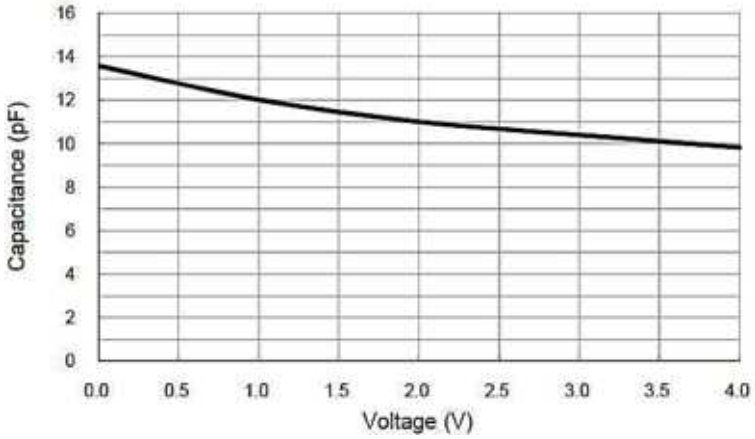


Fig 5 Transmission Line Pulsing (TLP) Measurement



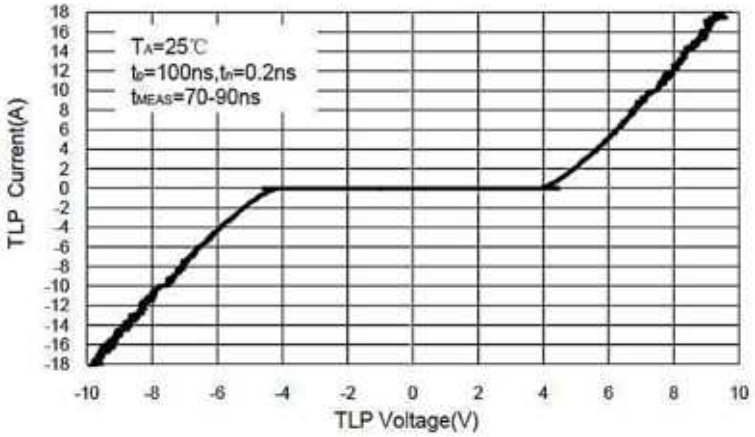


Fig 6 Clamping Voltage vs Peak Pulse Current

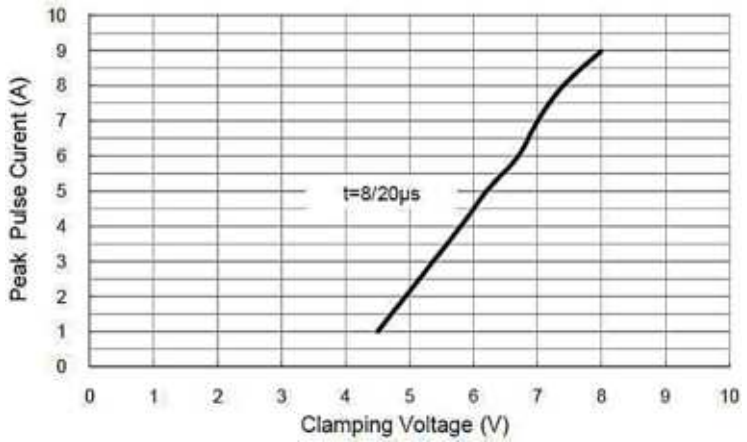

TAPE/REEL (Unit: mm)

All Devices are packed in accordance with EIA standard RS-481-A and specifications.

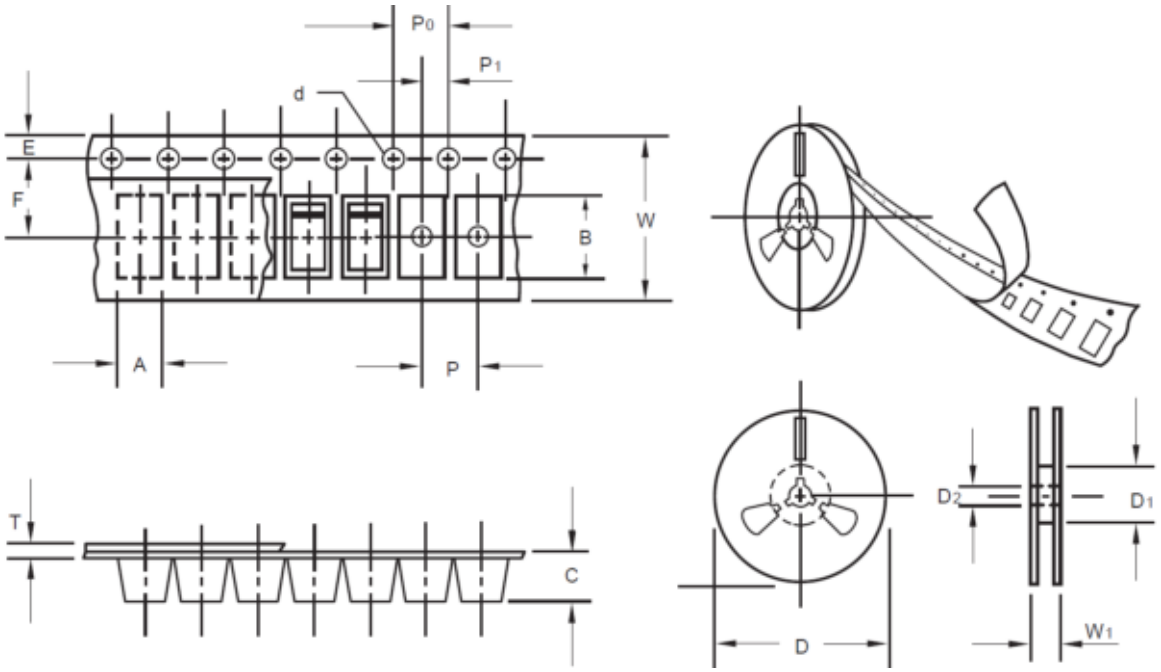

Item	Symbol	Tolerance	SOD-523
Carrier width	A	0.1	2.10
Carrier Length	B	0.1	4.00
Carrier Depth	C	0.1	1.60
Sprocket hole	d	0.05	1.55
7”Reel outside diameter	D	2.0	178.00
7”Reel inner diameter	D1	Min.	50.00
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.25
Tape width	W	0.3	8.15
Reel width	W1	1.0	10.50

SPQ PACKAGE for Reference

Item	Unit	Value
Case Code		SOD-523
Reel Size	Inch	7
Reel Size	mm	178
Tape Space	mm	/
SPQ /Reel	pcs	3000
Weigh /SPQ	LBs	
Weigh /SPQ	KGs	
Qty. Per Box	pcs	6,000
Inner Box	Inch	L8.0*W8.0*H1.5

DISCLAIMER

NextGen Component, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information