
SPM3020 -CA Series

SMD Power Inductor

Component Image & Dimension

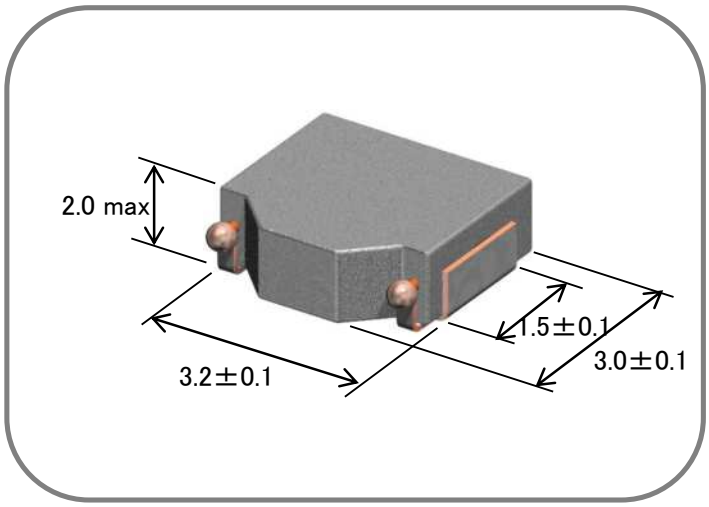

Features

a) Small Footprint and Low Profile Design :
Footprint : 3.2 x 3.0 mm Typ.
Height : 2.0mm Max.
b) High Power Handling Capability :
Small Copper Loss
Using Large Saturation Induction of
Fe- based metals
c) Flat inductance performance over temperature based on the high curie temperature of the iron powder core material.
d) Automatic Mounting in Tape&Reel Package.

Applications

Note Book & Mobile Computer, VRM,
Cellular Phone, HDD, Car accesories etc.


Electrical Specification (Provisional value)

TDK Identification	Inductance at 0A (uH)	Tol. (%)	Test Freq. (kHz)	DC Resistance Spec. (m-Ohm)	DC Resistance Typ. (m-Ohm)	Rated DC Current Idc 1 (A) max.	Idc 1 (A) typ.	Idc 2 (A) typ.
SPM3020T- R47M	0.47	+/-20%	100	28.9max	26.3	6.7	9.0	4.8
SPM3020T- 1R0M	1.0	+/-20%	100	42.2max	38.4	4.7	6.3	3.8
SPM3020T- 1R5M	1.5	+/-20%	100	64.8max	58.9	3.3	4.4	3.4
SPM3020T- 2R2M	2.2	+/-20%	100	90.0max	81.9	3.9	3.0	2.8
SPM3020T- 3R3M	3.3	+/-20%	100	127.2max	115.6	2.6	3.5	2.2
SPM3020T- 4R7M	4.7	+/-20%	100	173.0max	157.3	2.2	2.9	1.9

Note. *Idc 1 : Based on the inductance change.(-30% Reduction from Nominal L Value)*
Idc 2 : Based on the self temperature rise. (+40 deg typ.)
Operating Temperature Range: -40 ℃～+125 ℃ (including self temperature rise)

Caution: Please contact our sales person when you consider organic solvent or aqueous cleaning.

Inductance vs.DC Superposition

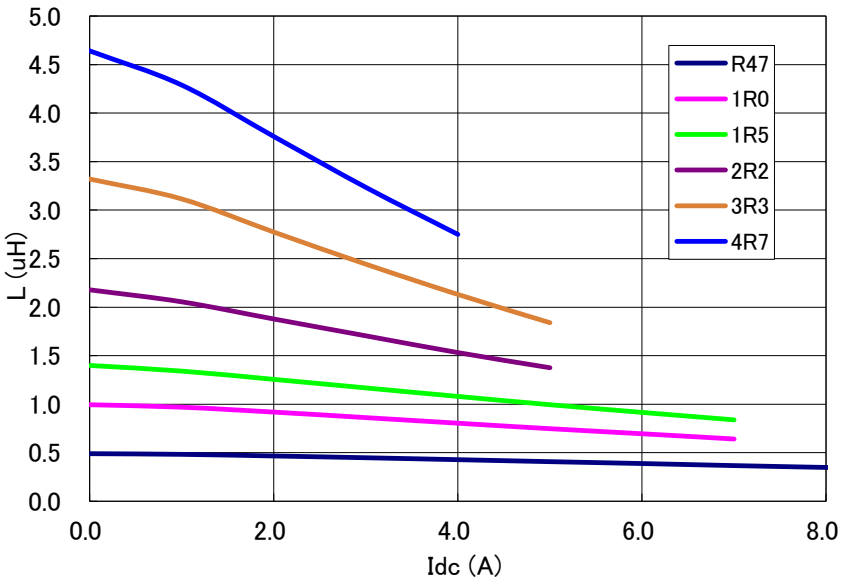

Recommended pad layout

