


ST ...-QUATTRO

The double connection of ST...-QUATTRO allows four conductors to be connected on one potential. The QUATTRO variants can therefore be used as compact power distributors.

The FBS plug-in bridge system allows bridging any number of terminal blocks and thus achieves further power distribution.

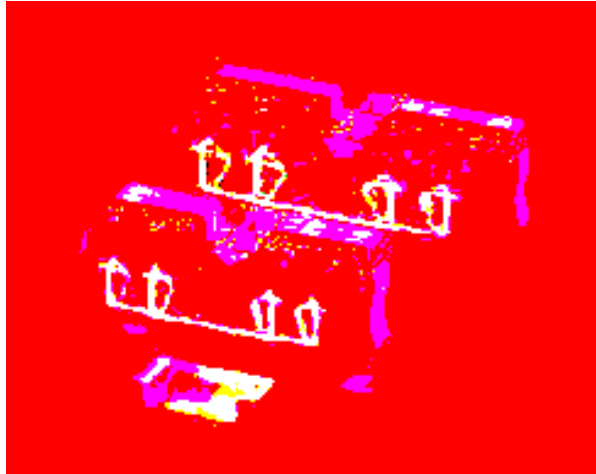

Terminal Block

ST 1,5-QUATTRO

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
IEC 60 947-7-1	0.08-1.5	0.08-1.5	28-16	17.5*	500
EN 50 019**	0.08-1.5	0.08-1.5	28-16	17.5*	420

** EU certificate of design approval no.: KEMA 00ATEX2129U 1)

1) For installation notes and the use of accessories for EEx e applications see Catalog CLIPLINE.

* The max. load current must not be exceeded by the total current of all connected conductors.

UL US KEMA

Technical data

or mounting on

blue terminal width 4.2

gray

projecting terminal segments

gray

of the insulation in the case of smaller cross sections
Cross section range:

0.08-0.2 mm
0.25-0.5 mm


gray

cross-connections in the
terminal center

3-pos.
4-pos.
5-pos.
10-pos.
20-pos.



for
visual and electrical separation
of terminal groups, 2 mm thick



est adapter,


and 4 mm

making contact in the bridge shaft



ing cover,

operating shafts of the "mini-spring"
ST spring cage terminal blocks




for
actuating the tension spring




labeling the outer marker grooves

white



labeling in the terminal center
and on the plug-in bridges

white



Dimensions

Height (NS 35/7.5 / NS 35/15) [mm]

chnical data in accordance with IEC/ DIN VDE

Rated surge voltage / contamination class [kV] / -


Surge voltage category / insulation material group - / -

Stranded with ferrule without plastic sleeve [mm]

Stranded with TWIN ferrule with plastic sleeve [mm]

Inflammability class in acc. with UL 94

CSA/CUL: [V] / [A] / AWG

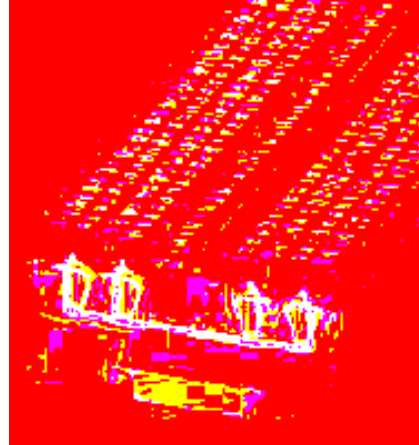

ype	Order No.	Pkt.
ST 1,5-QUATTRO BU	30 31 19 9	50
ISH 1,5/0,5	30 31 03 4	50
FBS 3-4 FBS 4-4 FBS 5-4 FBS 10-4 FBS 20-4	17.5 A	
TP ST-QUATTRO	30 30 81 5	50
	30 30 92 5	10

36.5 / 44
17.5 / 1.5
6 / 3
III / I
0.25 - 1.5
0.25 - 1.5
0.5
V0
-

Ground Terminal Block

ST 1,5-QUATTRO-PE



[mm	solid	stranded	AWG
IEC 60 947-7-2	0.08-1.5	0.08-1.5	28-16
EN 50 019*	0.08-1,5	0.08-1.5	28-16

* EU certificate of design approval no.: KEMA 00ATEX2129U

see Catalog CLIPLINE.
The current carrying capacity of the mounting rails should be observed.




Technical data

for mounting on		
	gray	
projecting terminal segments	gray	
of the insulation in the case of smaller cross sections		
Cross section range:	0.08-0.2 mm	
	0.25-0.5 mm	gray
for actuating the tension spring		
labeling the outer marker grooves	white	
labeling in the terminal center and on the plug-in bridges	white	
Dimensions		
Height (NS 35/7.5 / NS 35/15)	[mm]	
chnical data in accordance with IEC/ DIN VDE		
Rated surge voltage / contamination class	[kV] / –	
Surge voltage category / insulation material group	– / –	
Stranded with ferrule without plastic sleeve	[mm]	
Stranded with TWIN ferrule with plastic sleeve	[mm]	
Inflammability class in acc. with UL 94		
CSA/CUL: [V] / [A] / AWG		

ype	Order No.	Pkt.
ISH 1,5/0,5	30 31 03 4	50
	36.5 / 44	
	6 / 3	
	III / I	
	0.25 - 1.5	
	0.25 - 1.5	
	0.5	
	V0	
	–	

Four-Conductor Spring Cage Terminal Block ST 2,5-QUATTRO

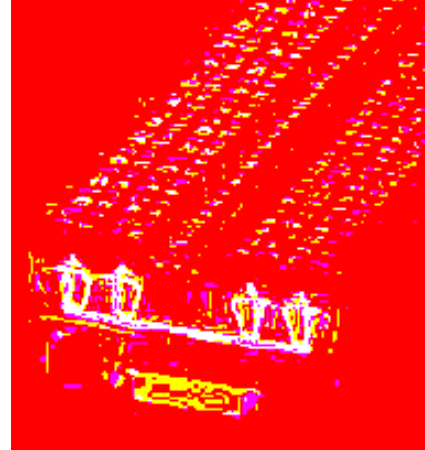

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
IEC 60 947-7-1	0.08-4	0.08-2.5	28-12	28*	800
EN 50 019**	0.08-4	0.08-2.5	28-12	24/21*	550



** EU certificate of design approval no.: KEMA 00ATEX2052U 1)

1) For installation notes and the use of accessories for EEx e applications see Catalog CLIPLINE.

* The max. load current must not be exceeded by the total current of all connected conductors.

UL US KEMA

Technical data

Spring cage terminal block, for mounting on 			gray	terminal width 5.2
			blue	terminal width 5.2
(1) End cover	gray			
(2) Segment cover , for covering projecting terminal segments	gray			
(3) Insulating stop sleeve , prevents unintentional clamping of the insulation in the case of smaller cross sections Cross section range:			white gray black	
			0.08-0.2 mm ² 0.25-0.5 mm ² 0.75-1 mm ²	
(4) Plug-in bridge , for cross-connections in the terminal center			2-pos. 3-pos. 4-pos. 5-pos. 10-pos. 20-pos.	
(5) Partition plate , for visual and electrical separation of terminal groups, 2 mm thick				
(6) Test adapter , for 4 mm Ø test connector PS and 4 mm Ø safety test connectors, making contact in the bridge shaft				
(7) 2.3 mm Ø test connector 1) , consisting of metal part and red insulating sleeve				
(8) Reducing plug				
(9) Warning cover , for the operating shafts of the "mini-spring" ST spring cage terminal blocks				
(10) Screwdriver , for actuating the tension spring				
(11) Zack strip , flat, for labeling the outer marker grooves	white			
(12) Zack strip , 10-section, for labeling in the terminal center and on the plug-in bridges	white			

Dimensions

Width / length / end cover width	[mm]
Height (NS 35/7.5 / NS 35/15)	[mm]

Technical data in accordance with IEC/ DIN VDE

Maximum load current/ cross section	[A] / [mm ²]
Rated surge voltage / contamination class	[kV] / –
Surge voltage category / insulation material group	– / –

Capacity connection

Stranded with ferrule with plastic sleeve	[mm ²]
Stranded with ferrule without plastic sleeve	[mm ²]
Stranded with TWIN ferrule with plastic sleeve	[mm ²]
Stripping length	[mm]

Internal cylindrical gauge (IEC 60 947-1)

Insulating material

Inflammability class in acc. with UL 94

Approval data (UL and CSA/CUL)

Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG
	CSA/CUL: [V] / [A] / AWG

1) Further colors are available on request.

Type	Order No.	Pcs. Pkt.
ST 2,5-QUATTRO	30 31 30 6	50
ST 2,5-QUATTRO BU	30 31 31 9	50
D-ST 2,5-QUATTRO	30 30 51 4	50
DS-ST 2,5	30 36 60 2	10
ISH 2,5/0,2	30 02 84 3	50
ISH 2,5/0,5	30 02 85 6	50
ISH 2,5/1	30 02 86 9	50
FBS 2-5 $I_{max}: 24 A$	30 30 16 1	50
FBS 3-5 $24 A$	30 30 17 4	50
FBS 4-5 $24 A$	30 30 18 7	50
FBS 5-5 $24 A$	30 30 19 0	50
FBS 10-5 $24 A$	30 30 21 3	10
FBS 20-5 $24 A$	30 30 22 6	10
ATP ST-QUATTRO	30 30 81 5	50
PAI 4	30 30 92 5	10
MPS-RD	02 01 55 3	10
RPS	02 01 64 7	10
WST 2,5	30 30 94 1	50
SZF 1 - 0,6 x 3,5	12 04 51 7	10
ZBF 5:UNPRINTED	08 08 64 2	10
ZB 5:UNPRINTED	10 50 00 4	10

5.2 / 72 / 2.2
36.5 / 44
28 / 4
8 / 3
III / I
0.25 - 2.5
0.25 - 2.5
0.5
10
A 3
PA
V0
600 / 20 / 26 - 12
600 / 20 / 26 - 12

Four-Conductor Spring Cage Ground Terminal Block ST 2,5-QUATTRO-PE

(IEC) [mm ²]	rigid solid	flexible stranded	AWG
IEC 60 947-7-2	0.08-4	0.08-2.5	28-12
EN 50 019*	0.08-4	0.08-2.5	28-12

* EU certificate of design approval no.: KEMA 00ATEX2052U 1)

1) For installation notes and the use of accessories for EEx e applications see Catalog CLIPLINE.





The current carrying capacity of the mounting rails should be observed.

   KEMA



Technical data

Spring cage ground terminal block,
for mounting on  green-yellow terminal width 5.2

(1) End cover	gray	
(2) Segment cover , for covering projecting terminal segments	gray	
(3) Insulating stop sleeve , prevents unintentional clamping of the insulation in the case of smaller cross sections Cross section range:	0.08-0.2 mm ² 0.25-0.5 mm ² 0.75-1 mm ²	white gray black
(4) Screwdriver , for actuating the tension spring		
(5) Zack strip , flat, for labeling the outer marker grooves	white	
(6) Zack strip , 10-section, for labeling in the terminal center and on the plug-in bridges	white	

Dimensions

Width / length / end cover width	[mm]
Height (NS 35/7.5 / NS 35/15)	[mm]

Technical data in accordance with IEC/ DIN VDE

Maximum load current/ cross section	[A] / [mm ²]
Rated surge voltage / contamination class	[kV] / –
Surge voltage category / insulation material group	– / –

Capacity connection

Stranded with ferrule with plastic sleeve	[mm ²]
Stranded with ferrule without plastic sleeve	[mm ²]
Stranded with TWIN ferrule with plastic sleeve	[mm ²]

Stripping length	[mm]
-------------------------	------

Internal cylindrical gauge (IEC 60 947-1)

Insulating material

Inflammability class in acc. with UL 94

Approval data (UL and CSA/CUL)

Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG
	CSA/CUL: [V] / [A] / AWG

Type	Order No.	Pcs. Pkt.
ST 2,5-QUATTRO-PE	30 31 32 2	50
D-ST 2,5-QUATTRO	30 30 51 4	50
DS-ST 2,5	30 36 60 2	10
ISH 2,5/0,2	30 02 84 3	50
ISH 2,5/0,5	30 02 85 6	50
ISH 2,5/1	30 02 86 9	50
SZF 1 - 0,6 x 3,5	12 04 51 7	10
ZBF 5:UNPRINTED	08 08 64 2	10
ZB 5:UNPRINTED	10 50 00 4	10

5.2 / 72 / 2.2

36.5 / 44

–

8 / 3

III / I

0.25 - 2.5

0.25 - 2.5

0.5

10

A 3

PA

V0

– / – / 26 - 12

– / – / 26 - 12

Four-Conductor Spring Cage Terminal Blocks

ST 4-QUATTRO

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
IEC 60 947-7-1	0.08-6	0.08-4	28-10	40*	800
EN 50 019**	0.08-6	0.08-4	28-10	34/25*	550

** EU certificate of design approval no.: KEMA 00ATEX2129U 1)

1) For installation notes and the use of accessories for EEx e applications see Catalog CLIPLINE.

* The max. load current must not be exceeded by the total current of all connected conductors.

UL US KEMA


Technical data

Spring cage terminal block,
for mounting on 

gray terminal width 6.2
blue terminal width 6.2

(1) **End cover**

gray



(2) **Segment cover**, for covering
projecting terminal segments

gray



(3) **Insulating stop sleeve**, prevents unintentional clamping
of the insulation in the case of smaller cross sections
Cross section range:

0.25-0.5 mm²
0.75-1 mm²




(4) **Plug-in bridge**, for
cross-connections in the
terminal center

2-pos.
3-pos.
4-pos.
5-pos.
10-pos.
20-pos.



(5) **Partition plate**, for
visual and electrical separation
of terminal groups, 2 mm thick



(6) **Test adapter**, for 4 mm Ø test connector PS
and 4 mm Ø safety test connectors,
making contact in the bridge shaft



(7) **2.3 mm Ø test connector 1)**, consisting of
metal part and red insulating sleeve



(8) **Reducing plug**



(9) **Warning cover**, for the
operating shafts of the "mini-spring"
ST spring cage terminal blocks




(10) **Screwdriver**, for
actuating the tension spring




(11) **Zack strip**, flat, for
labeling the outer marker grooves

white



(12) **Zack strip**, 10-section, for
labeling in the terminal center
and on the plug-in bridges

white



Dimensions

Width / length / end cover width	[mm]
Height (NS 35/7.5 / NS 35/15)	[mm]

Technical data in accordance with IEC/ DIN VDE

Maximum load current/ cross section	[A] / [mm ²]
Rated surge voltage / contamination class	[kV] / –
Surge voltage category / insulation material group	– / –

Capacity connection

Stranded with ferrule with plastic sleeve	[mm ²]
Stranded with ferrule without plastic sleeve	[mm ²]
Stranded with TWIN ferrule with plastic sleeve	[mm ²]
Stripping length	[mm]

Internal cylindrical gauge (IEC 60 947-1)

Insulating material

Inflammability class in acc. with UL 94

Approval data (UL and CSA/CUL)

Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG
	CSA/CUL: [V] / [A] / AWG

1) Further colors are available on request.



Type	Order No.	Pcs. Pkt.
ST 4-QUATTRO	30 31 44 5	50
ST 4-QUATTRO BU	30 31 45 8	50
D-ST 4-QUATTRO	30 30 52 7	50
DS-ST 4	30 36 61 5	10
ISH 4/0,5	30 02 88 5	50
ISH 4/1	30 02 89 8	50
FBS 2-6	I _{max} : 32 A	50
FBS 3-6		50
FBS 4-6		50
FBS 5-6		50
FBS 10-6		10
FBS 20-6		10
ATP ST-QUATTRO	30 30 81 5	50
PAI 4	30 30 92 5	10
MPS-RD	02 01 55 3	10
RPS	02 01 64 7	10
WST 4	30 30 95 4	50
SZF 1 - 0,6 x 3,5	12 04 51 7	10
ZBF 6:UNPRINTED	08 08 71 0	10
ZB 6:UNPRINTED	10 51 00 3	10

6.2 / 87 / 2.2
36.5 / 44
40 / 6
8 / 3
III / I
0.25 - 4
0.25 - 4
0.5 - 1
10
A 4
PA
V0
–
–

Four-Conductor Spring Cage Ground Terminal Block ST 4-QUATTRO-PE


(IEC) [mm ²]	rigid solid	flexible stranded	AWG
IEC 60 947-7-2	0.08-6	0.08-4	28-10
EN 50 019*	0,08-6	0,08-4	28-10

* EU certificate of design approval no.: KEMA 00ATEX2129U 1)

1) For installation notes and the use of accessories for EEx e applications see Catalog CLIPLINE.





The current carrying capacity of the mounting rails should be observed.

UL US KEMA

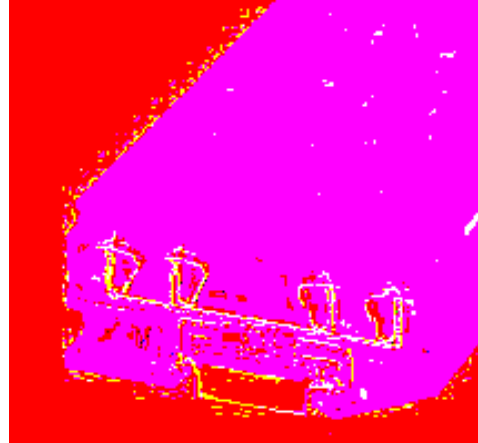

Technical data

Spring cage ground terminal block,
for mounting on  green-yellow terminal width 6.2

- | | | |
|---|--|--|
| (1) End cover | gray |  |
| (2) Segment cover , for covering projecting terminal segments | gray |  |
| (3) Insulating stop sleeve , prevents unintentional clamping of the insulation in the case of smaller cross sections
Cross section range: | 0.25-0.5 mm ²
0.75-1 mm ² | 
gray
black |
| (4) Screwdriver , for actuating the tension spring | |  |
| (5) Zack strip , flat, for labeling the outer marker grooves | white |  |
| (6) Zack strip , 10-section, for labeling in the terminal center and on the plug-in bridges | white |  |

Dimensions

Width / length / end cover width [mm]

Height (NS 35/7.5 / NS 35/15) [mm]

Technical data in accordance with IEC/ DIN VDE

Maximum load current/ cross section [A] / [mm²]

Rated surge voltage / contamination class [kV] / -

Surge voltage category / insulation material group - / -

Capacity connection

Stranded with ferrule with plastic sleeve [mm²]

Stranded with ferrule without plastic sleeve [mm²]

Stranded with TWIN ferrule with plastic sleeve [mm²]

Stripping length [mm]

Internal cylindrical gauge (IEC 60 947-1)

Insulating material

Inflammability class in acc. with UL 94

Approval data (UL and CSA/CUL)


Nom. voltage / nom. current / conduc. sizes UL: [V] / [A] / AWG

CSA/CUL: [V] / [A] / AWG

Type	Order No.	Pcs. Pkt.
ST 4-QUATTRO-PE	30 31 46 1	50
D-ST 4-QUATTRO	30 30 52 7	50
DS-ST 4	30 36 61 5	10
ISH 4/0,5 ISH 4/1	30 02 88 5 30 02 89 8	50 50
SZF 1 - 0,6 x 3,5	12 04 51 7	10
ZBF 6:UNPRINTED	08 08 71 0	10
ZB 6:UNPRINTED	10 51 00 3	10
6.2 / 87 / 2.2		
36.5 / 44		
-		
8 / 3		
III / I		
0.25 - 4		
0.25 - 4		
0.5 - 1		
10		
A 3		
PA		
V0		
-		
-		

Four-Conductor Spring Cage Terminal Block

ST 1,5-QUATTRO-U



(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
IEC 60 947-7-1	0.08-1.5	0.08-1.5	28-16	17.5*	500

* The max. load current must not be exceeded by the total current of all connected conductors.


Technical data

Spring cage terminal block,
for mounting on 

gray terminal width 4.2

(1) End cover

gray



(2) Segment cover, for covering projecting terminal segments

gray



(3) Insulating stop sleeve, prevents unintentional clamping of the insulation in the case of smaller cross sections Cross section range:

0.08-0.2 mm²
0.25-0.5 mm²




(4) Plug-in bridge, for cross-connections in the terminal center

2-pos.
3-pos.
4-pos.
5-pos.
10-pos.
20-pos.



(5) Partition plate, for visual and electrical separation of terminal groups, 2 mm thick



(6) Test adapter, for 4 mm Ø test connector PS and 4 mm Ø safety test connectors, making contact in the bridge shaft



(7) 2.3 mm Ø test connector ¹⁾, consisting of metal part and red insulating sleeve



(8) Reducing plug



(9) Warning cover, for the operating shafts of the "mini-spring" ST spring cage terminal blocks




(10) Screwdriver, for actuating the tension spring




(11) Zack strip, flat, for labeling the outer marker grooves

white



(12) Zack strip, 10-section, for labeling in the terminal center and on the plug-in bridges

white



Dimensions

Width / length / end cover width	[mm]
Height (NS 35/7.5 / NS 35/15)	[mm]

Technical data in accordance with IEC/ DIN VDE

Maximum load current/ cross section	[A] / [mm ²]
Rated surge voltage / contamination class	[kV] / –
Surge voltage category / insulation material group	– / –

Capacity connection

Stranded with ferrule with plastic sleeve	[mm ²]
Stranded with ferrule without plastic sleeve	[mm ²]
Stranded with TWIN ferrule with plastic sleeve	[mm ²]
Stripping length	[mm]

Internal cylindrical gauge (IEC 60 947-1)

Insulating material

Inflammability class in acc. with UL 94

Approval data (UL and CSA/CUL)

Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG
	CSA/CUL: [V] / [A] / AWG


¹⁾ Further colors are available on request.

Type	Order No.	Pcs. Pkt.
ST 1,5-QUATTRO-U	30 38 60 0	50
D-ST 2,5-QUATTRO	30 30 51 4	50
DS-ST 2,5	30 36 60 2	10
ISH 2,5/0,2	30 02 84 3	50
ISH 2,5/0,5	30 02 85 6	50
FBS 2-4	I_{max} : 17,5 A 30 30 11 6	50
FBS 3-4	17,5 A 30 30 12 9	50
FBS 4-4	17,5 A 30 30 13 2	50
FBS 5-4	17,5 A 30 30 14 5	50
FBS 10-4	17,5 A 30 30 15 8	10
FBS 20-4	17,5 A 30 30 35 2	10
ATP ST-QUATTRO	30 30 81 5	50
PAI 4	30 30 92 5	10
MPS-RD	02 01 55 3	10
RPS	02 01 64 7	10
WST 1,5	30 30 95 8	50
SZF 1 - 0,4 x 2,5	12 04 50 4	10
ZBF 4:UNPRINTED	08 08 58 7	10
ZB 4:UNPRINTED	08 05 00 1	10

4.2 / 72 / 2.2
36.5 / 44
17.5 / 1.5
6 / 3
III / I
0.25 - 2.5
0.25 - 2.5
0.5
10
A 1
PA
V0
–
–

Four-Conductor Spring Cage Terminal Block

ST 2,5-QUATTRO-U



(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
IEC 60 947-7-1	0.08-4	0.08-2.5	28-12	28*	800

* The max. load current must not be exceeded by the total current of all connected conductors.




Technical data

Spring cage terminal block,
for mounting on 

gray terminal width 5.2

(1) End cover

gray



(2) Segment cover, for covering projecting terminal segments

gray



(3) Insulating stop sleeve, prevents unintentional clamping of the insulation in the case of smaller cross sections

Cross section range:

0.08-0.2 mm²
0.25-0.5 mm²
0.75-1 mm²

white
gray
black




(4) Plug-in bridge, for cross-connections in the terminal center

2-pos.
3-pos.
4-pos.
5-pos.
10-pos.
20-pos.



(5) Partition plate, for visual and electrical separation of terminal groups, 2 mm thick



(6) Test adapter, for 4 mm Ø test connector PS and 4 mm Ø safety test connectors, making contact in the bridge shaft



(7) 2.3 mm Ø test connector ¹⁾, consisting of metal part and red insulating sleeve



(8) Reducing plug



(9) Warning cover, for the operating shafts of the "mini-spring" ST spring cage terminal blocks




(10) Screwdriver, for actuating the tension spring




(11) Zack strip, flat, for labeling the outer marker grooves

white



(12) Zack strip, 10-section, for labeling in the terminal center and on the plug-in bridges

white



Dimensions

Width / length / end cover width	[mm]
Height (NS 35/7.5 / NS 35/15)	[mm]

Technical data in accordance with IEC/ DIN VDE

Maximum load current/ cross section	[A] / [mm ²]
Rated surge voltage / contamination class	[kV] / –
Surge voltage category / insulation material group	– / –

Capacity connection

Stranded with ferrule with plastic sleeve	[mm ²]
Stranded with ferrule without plastic sleeve	[mm ²]
Stranded with TWIN ferrule with plastic sleeve	[mm ²]
Stripping length	[mm]

Internal cylindrical gauge (IEC 60 947-1)

Insulating material

Inflammability class in acc. with UL 94

Approval data (UL and CSA/CUL)

Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG
	CSA/CUL: [V] / [A] / AWG


¹⁾ Further colors are available on request.

Type	Order No.	Pcs. Pkt.
ST 2,5-QUATTRO-U	30 31 63 6	50
D-ST 2,5-QUATTRO	30 30 51 4	50
DS-ST 2,5	30 36 60 2	10
ISH 2,5/0,2	30 02 84 3	50
ISH 2,5/0,5	30 02 85 6	50
ISH 2,5/1	30 02 86 9	50
FBS 2-5	30 30 16 1	50
FBS 3-5	30 30 17 4	50
FBS 4-5	30 30 18 7	50
FBS 5-5	30 30 19 0	50
FBS 10-5	30 30 21 3	10
FBS 20-5	30 30 22 6	10
ATP ST-QUATTRO	30 30 81 5	50
PAI 4	30 30 92 5	10
MPS-RD	02 01 55 3	10
RPS	02 01 64 7	10
WST 2,5	30 30 94 1	50
SZF 1 - 0,6 x 3,5	12 04 51 7	10
ZBF 5:UNPRINTED	08 08 64 2	10
ZB 5:UNPRINTED	10 50 00 4	10

5.2 / 72 / 2.2
36.5 / 44
28 / 4
8 / 3
III / I
0.25 - 2.5
0.25 - 2.5
0.5
10
A 3
PA
V0
–
–

Four-Conductor Spring Cage Terminal Block

ST 4-QUATTRO-U



(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
IEC 60 947-7-1	0.08-4	0.08-2.5	28-12	28*	800

* The max. load current must not be exceeded by the total current of all connected conductors.

Technical data

Spring cage terminal block, for mounting on		gray	terminal width 6.2
(1) End cover		gray	
(2) Segment cover , for covering projecting terminal segments		gray	
(3) Insulating stop sleeve , prevents unintentional clamping of the insulation in the case of smaller cross sections Cross section range:			
		0.25-0.5 mm ² 0.75-1 mm ²	gray black
(4) Plug-in bridge , for cross-connections in the terminal center		2-pos. 3-pos. 4-pos. 5-pos. 10-pos. 20-pos.	
(5) Partition plate , for visual and electrical separation of terminal groups, 2 mm thick			
(6) Test adapter , for 4 mm Ø test connector PS and 4 mm Ø safety test connectors, making contact in the bridge shaft			
(7) 2.3 mm Ø test connector ¹⁾ , consisting of metal part and red insulating sleeve			
(8) Reducing plug			
(9) Warning cover , for the operating shafts of the "mini-spring" ST spring cage terminal blocks			
(10) Screwdriver , for actuating the tension spring			
(11) Zack strip , flat, for labeling the outer marker grooves		white	
(12) Zack strip , 10-section, for labeling in the terminal center and on the plug-in bridges		white	

Dimensions

Width / length / end cover width	[mm]
Height (NS 35/7.5 / NS 35/15)	[mm]

Technical data in accordance with IEC/ DIN VDE

Maximum load current/ cross section	[A] / [mm ²]
Rated surge voltage / contamination class	[kV] / –
Surge voltage category / insulation material group	– / –

Capacity connection

Stranded with ferrule with plastic sleeve	[mm ²]
Stranded with ferrule without plastic sleeve	[mm ²]
Stranded with TWIN ferrule with plastic sleeve	[mm ²]
Stripping length	[mm]

Internal cylindrical gauge (IEC 60 947-1)


Insulating material

Inflammability class in acc. with UL 94

Approval data (UL and CSA/CUL)

Nom. voltage / nom. current / conduc. sizes	UL: [V] / [A] / AWG
	CSA/CUL: [V] / [A] / AWG

¹⁾ Further colors are available on request.

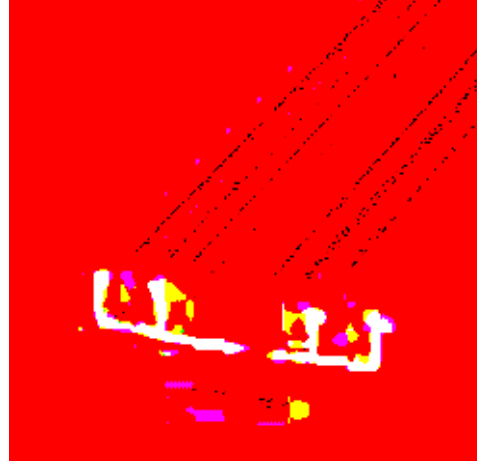

Type	Order No.	Pcs. Pkt.	
ST 4-QUATTRO-U	30 38 63 9	50	
D-ST 4-QUATTRO	30 30 52 7	50	
DS-ST 4	30 36 61 5	10	
ISH 4/0,5 ISH 4/1	30 02 88 5 30 02 89 8	50 50	
FBS 2-6 FBS 3-6 FBS 4-6 FBS 5-6 FBS 10-6 FBS 20-6	I_{max} : 32 A 32 A 32 A 32 A 32 A 32 A	30 30 33 6 30 30 24 2 30 30 25 5 30 30 34 9 30 30 27 1 30 30 36 5	50 50 50 50 10 10
ATP ST-QUATTRO	30 30 81 5	50	
PAI 4	30 30 92 5	10	
MPS-RD	02 01 55 3	10	
RPS	02 01 64 7	10	
WST 4	30 30 95 4	50	
SZF 1 - 0,6 x 3,5	12 04 51 7	10	
ZBF 6:UNPRINTED	08 08 71 0	10	
ZB 6:UNPRINTED	10 51 00 3	10	

6.2 / 87 / 2.2
36.5 / 44
40 / 6
8 / 3
III / I
0.25 - 4
0.25 - 4
0.5 - 1
10
A 4
PA
V0
–
–

© Phoenix Contact 2003