

Features :

- 1500VDC I/O isolation
- Internal SMD technology
- Built-in EMI filter
- Cooling by free air convection
- Non-conductive plastic case
- Dual in line package
- 100% burn-in test
- Low cost / High reliability
- Approvals: FCC / EAC / CE / UKCA
- 2 years warranty

GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

SELECTION GUIDE

ORDER NO.		SUS01L-05	SUS01M-05	SUS01N-05	SUS01O-05	SUS01L-09	SUS01M-09	SUS01N-09	SUS01O-09
	DC OUTPUT VOLTAGE	5V				9V			
	OUTPUT CURRENT RANGE	0 ~ 200mA				0 ~ 111mA			
	EFFICIENCY	73%	74%	72%	74%	75%	79%	80%	77%


ORDER NO.		SUS01L-12	SUS01M-12	SUS01N-12	SUS01O-12	SUS01L-15	SUS01M-15	SUS01N-15	SUS01O-15
	DC OUTPUT VOLTAGE	12V				15V			
	OUTPUT CURRENT RANGE	0 ~ 84mA				0 ~ 67mA			
	EFFICIENCY	78%	82%	83%	83%	79%	82%	83%	83%

SPECIFICATION

OUTPUT	RATED POWER	1W							
	RIPPLE & NOISE (max.) Note.2	100mVp-p							
	LINE REGULATION Note.3	±1.2% for 1% input variation							
	LOAD REGULATION Note.4	±8.0%							
	VOLTAGE ACCURACY	±2.0%							
	SWITCHING FREQUENCY	50KHz min.							
INPUT	VOLTAGE RANGE	4.5 ~ 5.5V	10.8 ~ 13.2V	21.6 ~ 26.4V	43.2 ~ 52.8V	4.5 ~ 5.5V	10.8 ~ 13.2V	21.6 ~ 26.4V	43.2 ~ 52.8V
	NORMAL VOLTAGE	5V	12V	24V	48V	5V	12V	24V	48V
	INPUT CURRENT Full load	280mA	112mA	55mA	28mA	280mA	112mA	55mA	28mA
	INPUT CURRENT No load	21mA	11mA	10mA	3mA	21mA	11mA	10mA	3mA
	FILTER	Capacitor type							
	PROTECTION	Fuse recommended							
PROTECTION	OVERLOAD	Momentary							
		Protection type : Broken							
	SHORT CIRCUIT	Momentary							
		Protection type : Broken							
ENVIRONMENT	WORKING TEMP.	-25 ~ +71℃ (Refer to "Derating Curve")							
	WORKING HUMIDITY	20% ~ 90% RH non-condensing							
	STORAGE TEMP., HUMIDITY	-25 ~ +105℃, 10 ~ 95% RH							
	TEMP. COEFFICIENT	±0.03% / ℃ (0 ~ 50℃)							
	VIBRATION	10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes							
SAFETY & EMC	SAFETY STANDARDS	EAC TP TC 020/2011 approved							
	WITHSTAND VOLTAGE	I/P-O/P:1.5KVDC							
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25℃ / 70% RH							
	ISOLATION CAPACITANCE	80pF max.							
	EMC EMISSION	Compliance to BS EN/EN55032 Class B, FCC part 15 Class B, EAC TP TC 020							
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8, light industry level, criteria A, EAC TP TC 020							
OTHERS	MTBF	700khrs min. MIL-HDBK-217F(25℃)							
	DIMENSION	22.6*9.9*8.9mm or 0.89"*0.39"*0.35" inch (L*W*H)							
	PACKING	3.1g ; 22pcs/per tube, 3080pcs/140 tube/per carton							

Mechanical Specification


Unit: mm (inch)

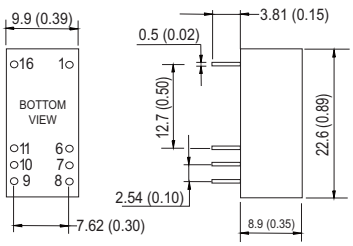

Pin Configuration

Pin No.	Output
1 & 16	+Vin
6 & 11	-Vout
7 & 10	+Vout
8 & 9	-Vin



Derating Curve

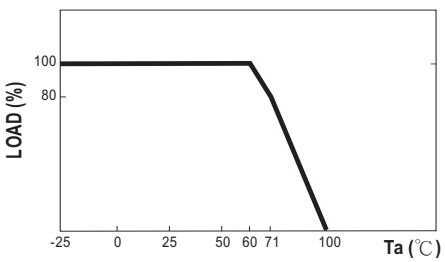

NOTE

1.All parameters are specified at normal input, rated load, 25℃ 70% RH ambient.
2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
3.Line regulation is measured from low line to high line at rated load.
4.Load regulation is measured from 20% to 100% rated load.
※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx

■ Packing

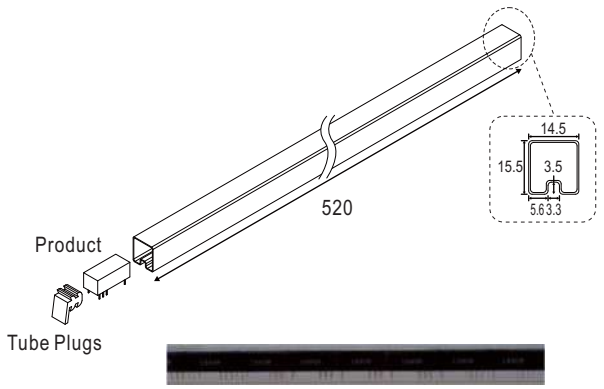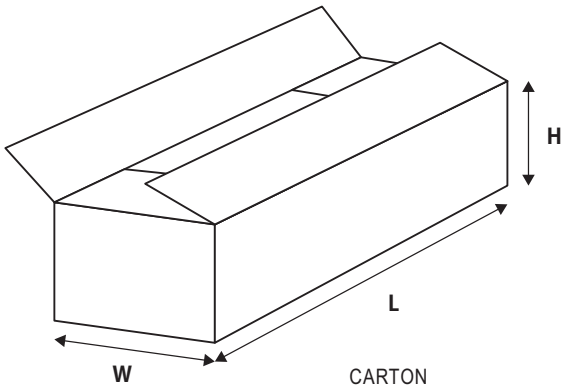Standard Tube Packing	MPQ Per Tube (PCS)	One Tube G.W.	Max. Q'TY/ Carton(PCS)	One Carton G.W.
Unit : mm  Tube pattern  CARTON L620 x W230 x H230	22	110g	3080	16.2Kg

■ Installation Manual

Please refer to : http://www.meanwell.com/manual.html