

Heyco® Snap Bushings

Mounting Hole Diameter Range: 1.000″ (25,4 mm) to 2.500″ (63,5 mm)

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS					
					A Inside Diameter		B Head Diameter		C Overall Height	
in.	mm.	Black	White		in.	mm.	in.	mm.	in.	mm.
Multiple Locking Steps for Panel Thickness up to .125″ (3,2 mm)										
1.000	25,4	**2140**	**2141**	SB 1000-12	.77	19,4	1.13	28,6	.45	11,5
1.093 - 1.125	27,8 - 28,6	**2160** **2163** **2166**	**2161** **2164** **2167**	SB 1093-13 SB 1093-14 SB 1093-15	.81 .88 .94	20,6 22,2 23,8	1.22	30,9		
1.187	30,2	**2182**	**2183**	SB 1187-15	.94	23,8	1.32	33,5		
1.250	31,8	**2198**	**2199**	SB 1250-15	.94	23,8	1.36	34,5		
		2201	**2202**	SB 1250-16	1.00	25,4	1.31	33,3		
1.375	34,9	**2207** **2210**	**2208** **2211**	SB 1375-14 SB 1375-16	.88 1.01	22,2 25,8	1.49	37,9		
1.500	38,1	**2233** **2236** **2240**	**2234** **2237** **2241**	SB 1500-17 SB 1500-18 SB 1500-21	1.06 1.13 1.31	27,0 28,6 33,3	1.61	40,9		
1.625	41,3	**2273**	**2274**	SB 1625-21	1.31	33,3	1.74	44,2		
1.750	44,5	**2300**	**2301**	SB 1750-22	1.38	34,9	1.88	47,6		
1.875	47,6	**2287**	**2288**	SB 1875-24	1.50	38,1	2.00	50,8		
2.000	50,8	**2400** **2406**	**2401** **2414**	SB 2000-26 SB 2000-28	1.64 1.75	41,6 44,5	2.13	54,0		
Multiple Locking Steps for Panel Thickness up to .250″ (6,4 mm)										
2.093	53,1	**2415**	**2416**	SB 2.093-29	1.81	46,0	2.35	59,7	.72	18,3
2.250	57,2	**2419** **2417**	**-** **2418**	SB 2.250-29-180 SB 2.250-29	1.80 1.86	45,7 47,1	2.48	63,1		
2.500	63,5	**2420**	**2421**	SB 2.500-31	1.97	50,0	2.66	67,5		

NEW!

Standard colors black and white. Consult Heyco for other colors.


- **Convert raw-edged holes to smooth, neat, insulated holes.**
- Insulate and mechanically protect electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Locking fingers snap into holes with fingertip pressure.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Withstand a push back force of 35 pounds.
- Available in multiple sizes for use in .250″ (6,4 mm) to 6.00″ (152,4 mm) diameter holes.
- We offer the following brass-colored parts for lamp and lighting applications:
  Part No. 2012, SB 312-3 Brass
  Part No. 2033, SB 375-4 Brass
  Part No. 2041, SB 437-4 Brass

Larger 3.000″ (76,2 mm) to 6.000″ (152,4 mm) Diameter Parts

Small Packs Available

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PACKAGING		PART DIMENSIONS					
					BULK (Std)	SMALL PACK*	A Inside Diameter		B Head Diameter		C Overall Height	
in.	mm.	Black	White				in.	mm.	in.	mm.	in.	mm.
Multiple Locking Steps for Panel Thickness up to .250″ (6,4 mm)												
3.000	76,2	**2461**	**2462**	SB 3.000-39	300	5	2.47	62,7	3.15	80,0	.75	19,1
		2424	**2425**	SB 3.000-44	300	5	2.75	69,9	3.16	80,2	.72	18,3
3.375 3.500	85,7 88,9	**2407** **2470**	**2408** **2471**	SB 3.375-45 SB 3.500-47	400 200	5 5	2.81 2.94	71,4 74,7	3.66	93,0	.72	18,3
4.000	101,6	**2479**	**2480**	SB 4.000-55	300	5	3.47	88,1	4.15	105,4		
5.000 6.000	127,0 152,4	**2409** **2484**	**2410** **2485**	SB 5.000-70 SB 6.000-86	150 130	1 1	4.38 5.38	113,8 139,2	5.22 6.22	132,6 157,9	.74	18,8

Standard colors black and white. Consult Heyco for other colors.
*Small Pack available in Black color only. To order, please add the suffix -P to Part No., e.g., 2461-P

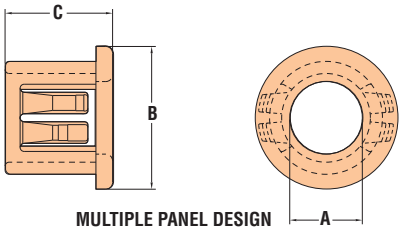

MULTIPLE PANEL DESIGN

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E15331
	Certified by Canadian Standards Association, File 8919
Flammability Rating	94V-2
Temperature Range	-.4°F (-18°C) to 221°F (105°C)

Quick Specs