
Storm AXS
Toughened Access Control Solutions

# StrikeMaster ES

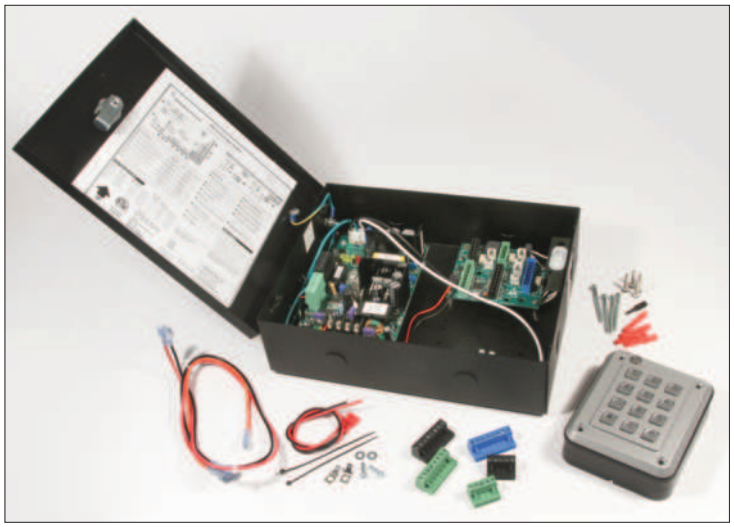

## Stand-alone access control system for one or two doors

### The new StrikeMaster ES is a robust and reliable Keypad Access Control System for installations requiring elevated security levels.


DOMESTIC
RETAIL
CORPORATE
CIVIC
INDUSTRIAL

Constructed to survive in exposed, outdoor or unsupervised environments these systems combine the field proven durability of the StrikeMaster keypad with a separate, remotely secured electronic control module. The control module along with a dedicated high spec power supply is contained within a tamper alarmed steel enclosure. This enclosure is located within the secured building, protected from criminal attempts to breach or disable building security systems.

The control module supports both IN and OUT functionality of either one or two keypads (one or two doors).

Available in vandal resistant or robust illuminated versions.


- UL294 compliant power supply with 2 door controller.
- Battery management / back-up facility (battery not supplied) provides up to 8 hours of operation during power failure.
- Vandal resistant, IP65 rated, UL294 compliant, secure keypad.
- Additional keypads also available.
- Audible and visual confirmation of code acceptance and code denied (at the keypad).
- Up to 100 programmable user codes can be stored for each keypad.

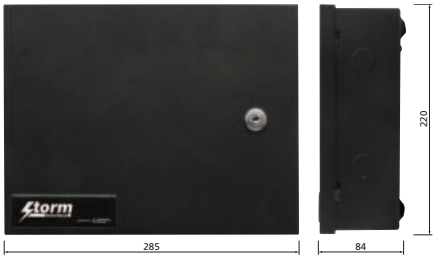

All dimensions in mm


- 4, 5 and 6 digit PINs can be programmed.
- Door latched or door locked mode.
- Door forced alarm feature.
- Entry under duress alarm feature.
- Door sensor feature.
- Door bell feature with unique tone for each door.
- Software based tamper detection / alarm feature.
- Anti tamper switch on keypad to detect removal from back box.
- Back box suitable for surface fixing.
- Back box also suitable for fixing to UK, USA and European format flush mount electrical wall boxes (not supplied).

Anti vandal keypad | Illuminated keypad

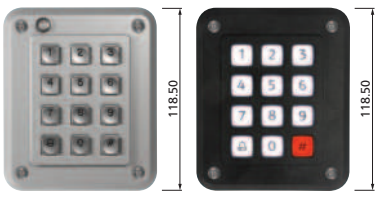

All dimensions in mm

| | |
|---|---|
| **Electrical Input Specification** | |
| Voltage: | **120V AC** |
| Max Current: | **1.6A** |
| **Electrical Output Specification** | |
| Voltage: | **11.3 – 12V DC** |
| Current: | **4.5A (nominal), 6A during alarm condition** |

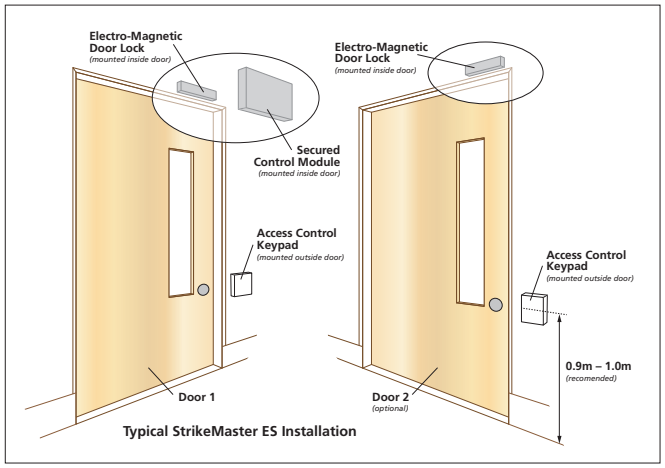

Typical StrikeMaster ES Installation

## Part Numbers

| | |
|---|---|
| Storm-AXS StrikeMaster ES controller 120V with anti vandal keypad (UL294) | **DXPS1K30** |
| Storm-AXS StrikeMaster ES controller 120V with illuminated keypad (UL294) | **DXPS1W30** |

| **Specified for use with Storm AXS Access Control Solutions** | **Part Numbers** |
|---|---|
| Storm-AXS StrikeMaster ES Anti vandal keypad | **DX1KT20** |
| Storm-AXS StrikeMaster ES Illuminated keypad | **DX2KW20** |
| Storm-AXS Electro-magnetic door locks | **DEL600, DEL1200, DEGL1200** |

Whilst every effort is made to ensure details are correct at time of print, specifications are subject to change without notice.

*For more information & to order:*

***www.storm-interface.com***

**Storm Interface products include technology protected by international patents and design registration. All rights reserved.**
Storm is a trademark of Keymat Technology Ltd
Storm Interface is a trading name of Keymat Technology Ltd

SMESUS July 2015
Designed & produced by **NIK Design Ltd**
www.nikdesign.co.uk

FM 39602

