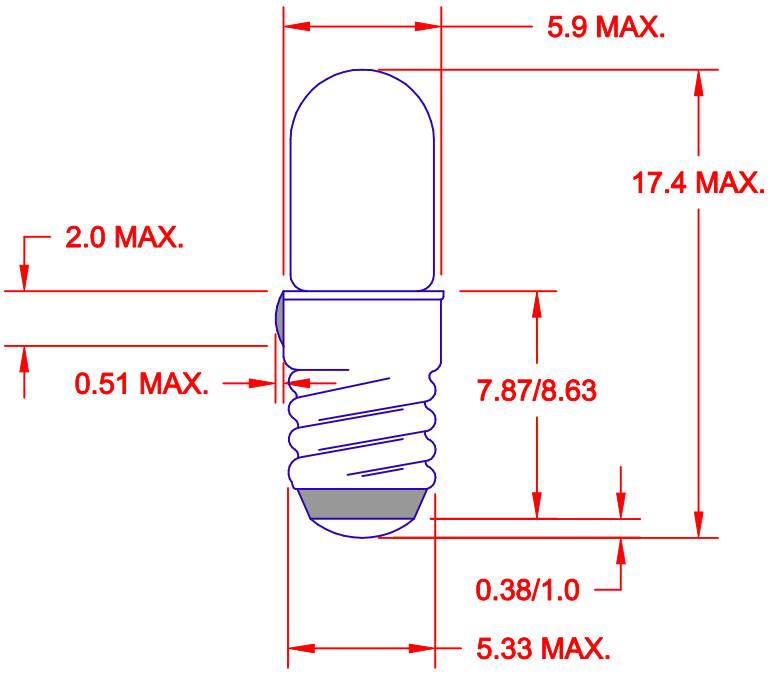


OUTSIDE DIAMETER		THREADS PER INCH	DEPTH OF THREAD	RADIUS OF THREAD
MAJOR CREST OF THREAD	MINOR ROOT OF THREAD			
MIN. .206" (5.23mm)	- - - - -	25.4	.011" MIN. (.28mm)	.0116" (.29mm)
MAX. .210" (5.33mm)	MAX. .188" (4.77mm)			

JKL LAMP NUMBER	VOLTS RATED	AMPS ±10%	MSCP ±25%	LUMENS ±25%	AVERAGE LIFE HRS.	FILAMENT TYPE
1769	2.5	.200	.200	2.51	500	C-2R
373	14.0	.080	.500	6.29	2,500	C-2F
8384	28.0	.040	.200	2.51	50,000	C-2F
335	28.0	.040	.340	4.27	4,000	C-2F
8369	28,0	.065	.650	8.17	5,000	C-2F

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
A	DELETE NOTE	4/9/01
	RELEASE & CANCEL 335LSV	11/17/00

METRIC
THIRD ANGLE PROJECTION

DIMENSIONS ARE IN MILLIMETERS
TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- 0.2
2 PL +/- 0.20
ANGLE +/- 0

JKL COMPONENTS CORPORATION

TITLE: T-1 3/4 STANDARD MIDGET SCREW BASE LAMP

DRAWN BY	APPV'D BY	DATE	SIZE	FSCM NO.	DRAWING NO.
L. WENGSTROM	E.D.	4/9/01	A	55335	SCREW BASE T-1 3/4--17.4

- CAD DRAWING -
MANUAL REVISIONS NOT PERMITTED

SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
NONE	11/17/00	4/9/01	A	1 OF 1