



## 23 Series T-3 1/4 & T-5 Lampholders Minature Wedge Base



### Overview

The 23 Series lampholders are designed for automotive and appliance applications. Most lamp holders can be supplied as either non-grounded or grounded units with printed circuit board or solder lug terminals or 6" wire leads. Many bracket and mounting options are available including plug buttons for 5/8" mounting holes and a 518" twist and lock socket. Lampholders are designed for use in low voltage applications with T-5 & T-3 1/4 wedge base lamps.

### Key features

- Miniature wedge base non-grounded or grounded lampholders
- Black nylon housing
- 6" wire leads, printed circuit board or solder lug terminals
- Maximum ratings: 20 Watts, 28 Volts
- UL recognized • UL File E20356

## Specifications

### Housing:

Black nylon, other colors also available. Rated maximum temperature 85°C.

**Contacts:** brass

### Terminals:

**Solder lug:** electro tined brass, 0.110" length x 0.010" thick, with one wire hole 3/32"x1/16" in diameter. Non-grounded units are supplied with two terminals. Grounded units are supplied with one terminal.

**Printed circuit board terminals:** brass

**Wire Leads:** #22 AWG, black, stranded tinned copper, PVC insulated, UL/CSA rated 105 °C, stripped 1/2". Non-grounded units are supplied with two 6" wire leads. Grounded units are supplied with one 6" wire lead. Custom wire lengths, stripping, termination and wire types are also available.

### Mounting:


**Brackets:** 0.025" to 0.032" zinc plated steel.

**Plug buttons:** for 5/8" mounting hole, nylon or zinc plated steel.


**Twist & Lock:** for 5/8" mounting hole.

**Maximum rating:** 20 Watts, 28 Volts

## Dimensions

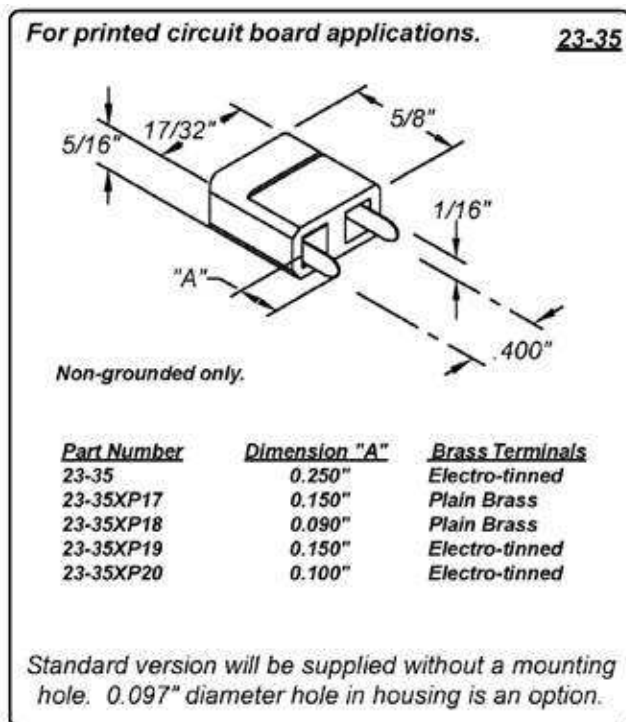


Dimensions are in inches

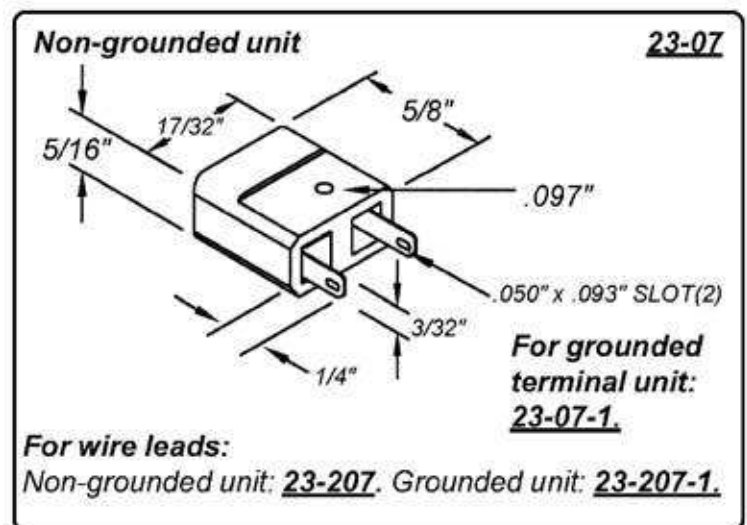

## Dimensions

\* UL Recognition not available on these models.

Dimensions are in inches

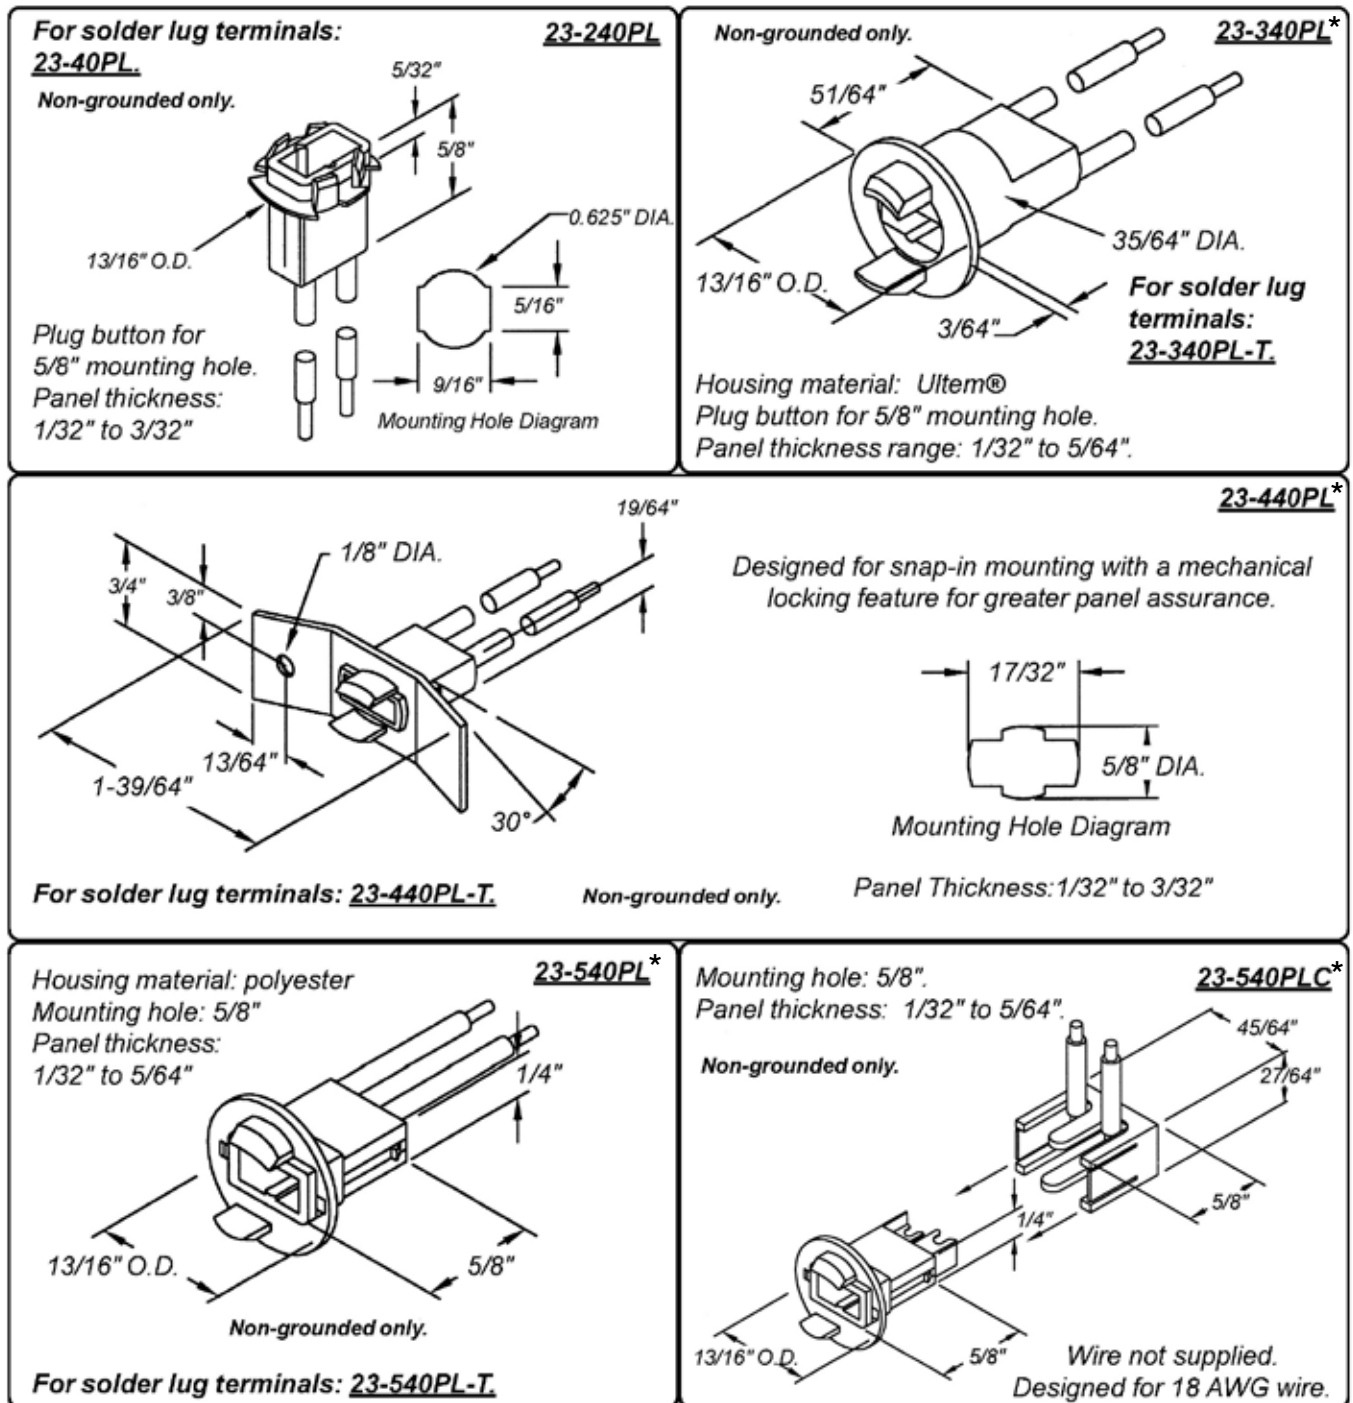

## Compliances and Approvals

