Surface Mount

RF Transformer

TCM4-25+

50Ω 500 to 2500 MHz



Generic photo used for illustration purposes only

CASE STYLE: DB714

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

Features

- wide bandwidth, 500 to 2500 MHz
- balanced transmission line with secondary center tap
- good return loss
- plastic base with solder plated leads
- aqueous washable

Applications

- PCS
- cellular

Electrical Specifications

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (secondary/primary)			4		Ohm
Frequency Range		500		2500	MHz
Insertion Loss*	500 - 2500		3		dB
	700 - 1500		2		
	750 - 1200		1		

* Insertion Loss is referenced to mid-band loss, 0.2 dB typ.

Maximum Ratings


Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

Function	Pin Number
PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	2
NOT USED	5


Config. H



REV. H
ECO-006688
M164261
TCM4-25+
ED-7875/2
IG/TD/AM
210406

Mini-Circuits®
www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Outline Drawing

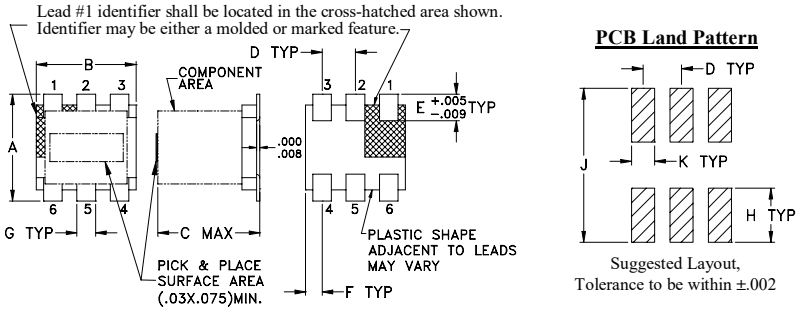

Outline Dimensions (inch / mm)


A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64

G	H	J	K	wt
.028	.065	.190	.030	grams
0.71	1.65	4.83	0.76	0.15

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
400	1.66	6.09
600	0.74	10.92
700	0.54	13.81
900	0.38	21.02
1000	0.37	22.67
1100	0.40	20.79
1300	0.48	16.41
1400	0.53	14.94
1500	0.59	13.79
1800	0.74	11.65
2000	0.84	10.75
2200	0.96	10.03
2500	1.14	8.96
2800	1.38	7.82
3000	1.59	7.06



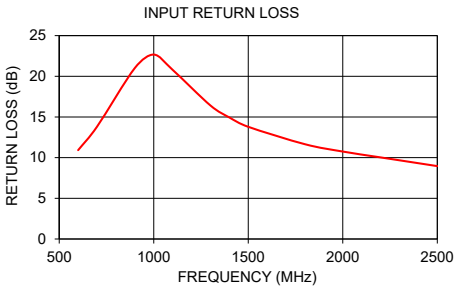

Additional Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp