



Mini-Circuits

SURFACE MOUNT

top hat



Power Splitter/Combiner TCP-2-33X+

2 Way-0° 50Ω 1000 to 3000 MHz

FEATURES

- Low insertion, 0.8 dB typ.
- Excellent amplitude unbalance, 0.3 dB typ.
- Very good phase unbalance, 1.0 deg. typ.
- External resistor required
- Aqueous washable
- Leads for excellent solderability
- Low cost



Generic photo used for illustration purposes only

CASE STYLE: DB1627

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

APPLICATIONS

- Cellular
- PCN
- GPS

ELECTRICAL SPECIFICATIONS AT 25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		1000		3000	MHz
Insertion Loss, above 3.0 dB	1000 - 3000	—	0.8	1.9	dB
Isolation	1000 - 3000	15	18	—	dB
Phase Unbalance	1000 - 3000	—	—	5.0	Degree
Amplitude Unbalance	1000 - 3000	—	—	0.9	dB

MAXIMUM RATINGS

Parameter	Ratings
Operating temperature	-40°C to 85°C
Storage temperature	-55°C to 100°C
RF Power Input (as splitter)	0.5 W max.

Permanent damage may occur if any of these limits are exceeded.

FUNCTIONAL SCHEMATIC





Mini-Circuits

SURFACE MOUNT




Power Splitter/Combiner TCP-2-33X+

PIN CONNECTIONS

SUM PORT	2,5,6
PORT 1	3
PORT 2	4
GROUND	1
EXT. RESISTOR 200Ω	3,4

PRODUCT MARKING: PD

DEMO BOARD MCL P/N: TB-464
SUGGESTED PCB LAYOUT (PL-357)

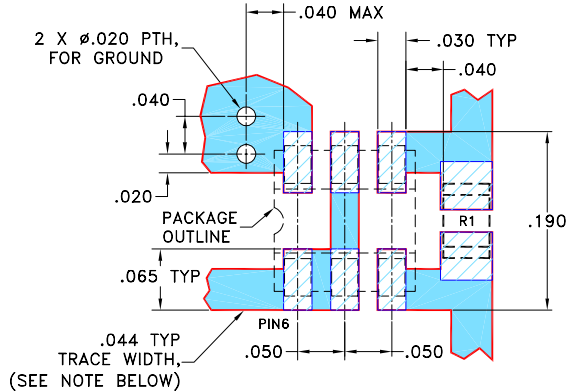

RESISTOR R1: 200 ± 1% Ohm, 0805 SIZE


NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

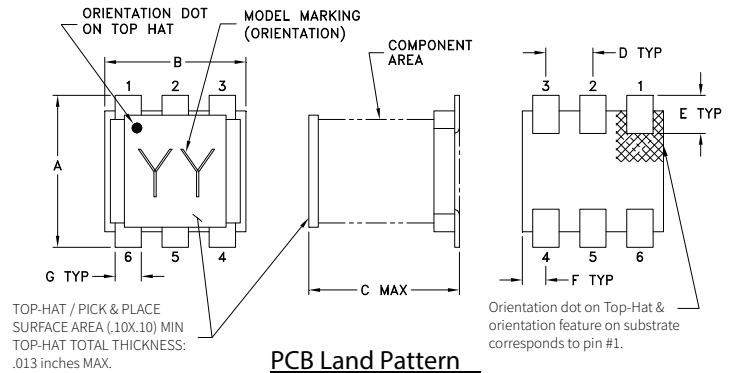

PCB Land Pattern



SUGGESTED LAYOUT
TOLERANCE TO BE WITHIN ±.002

OUTLINE DIMENSIONS (Inches mm)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.15

TAPE & REEL INFORMATION: F47



Mini-Circuits

SURFACE MOUNT






Power Splitter/Combiner TCP-2-33X+

TYPICAL PERFORMANCE DATA AT 25°C

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR (:1)		
	S-1	S-2				S	1	2
1000.00	3.65	3.76	0.11	17.21	0.35	1.89	1.42	1.44
1200.00	3.65	3.80	0.15	18.46	0.37	1.85	1.47	1.49
1400.00	3.65	3.85	0.20	19.93	0.41	1.81	1.51	1.54
1600.00	3.67	3.90	0.23	21.66	0.50	1.76	1.56	1.59
1700.00	3.68	3.93	0.25	22.55	0.53	1.74	1.58	1.61
1800.00	3.70	3.96	0.26	23.43	0.59	1.73	1.61	1.64
1900.00	3.71	3.99	0.28	24.14	0.65	1.71	1.63	1.67
2000.00	3.73	4.02	0.29	24.63	0.74	1.69	1.66	1.70
2100.00	3.75	4.05	0.30	24.78	0.82	1.67	1.69	1.73
2200.00	3.78	4.10	0.31	24.62	0.91	1.67	1.73	1.76
2300.00	3.82	4.15	0.32	24.17	0.97	1.66	1.76	1.79
2400.00	3.87	4.21	0.34	23.60	1.16	1.66	1.80	1.84
2600.00	3.93	4.29	0.35	21.94	1.27	1.68	1.88	1.89
2800.00	4.02	4.40	0.38	20.24	1.45	1.72	1.94	1.96
3000.00	4.12	4.53	0.41	18.75	1.73	1.76	2.00	2.00

1. Total Loss = Insertion Loss + 3dB splitter loss.

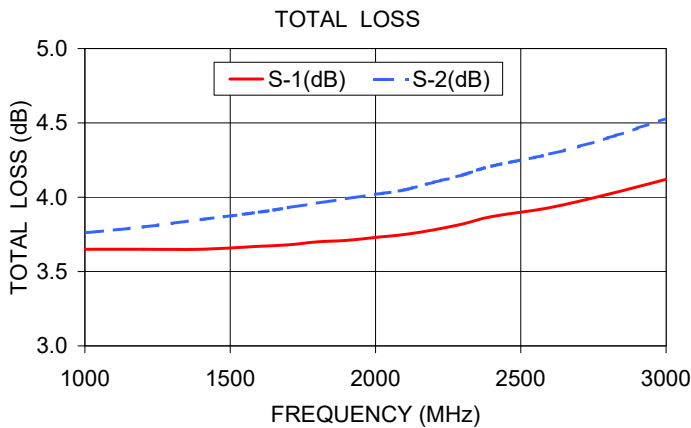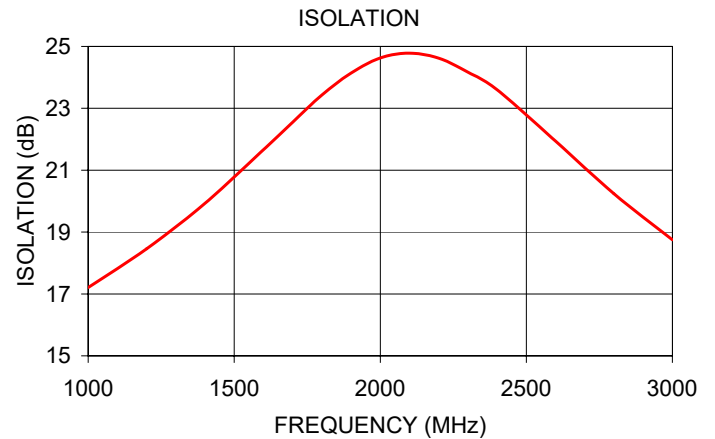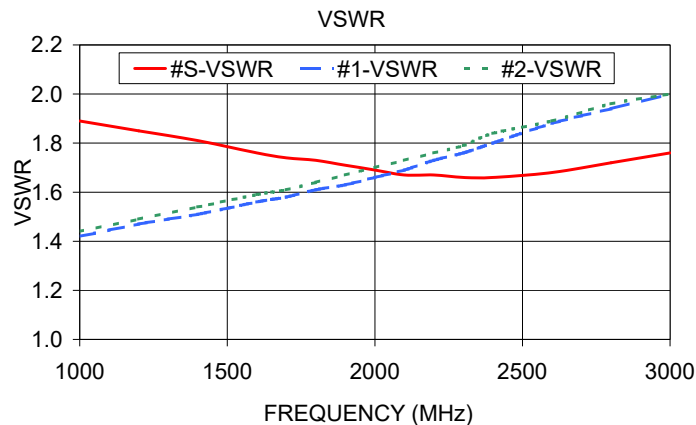

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

