


TOP VIEW

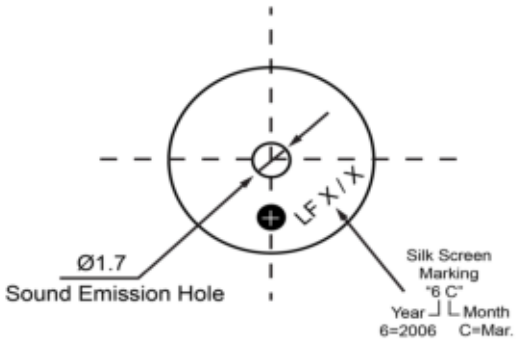

SIDE VIEW

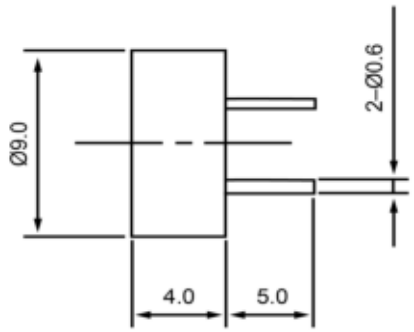

BOTTOM VIEW

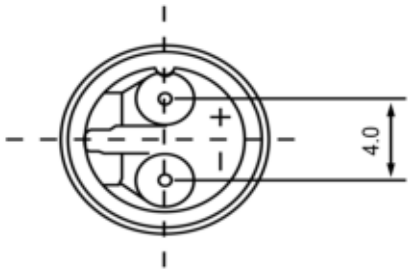

Specifications		
Description	**Value**	**Unit**
Technology	Electro-Mechanical	
Resonant Frequency	2,731	(Hz)
Rated Voltage	3	(V)
SPL @ 10cm	82	(dBA)
Coil Resistance	20	(ohm)
Mount Type	Thru Hole	
Voltage Range	2 ~ 5	(V)
Max Rated Current	70	(mA)
Housing Material	NORYL	
Operating Temperature	-20 ~ +70	°C
Storage Temperature	-20 ~ +70	°C
Weight	0.6	(g)

Notes

1) All dimensions are in mm unless otherwise noted
2) All parts meet RoHS

DB UNLIMITED

Electro-Mechanical Transducer

Revision History

Version	Description	Date	Approved
1	Released from Engineering	10/21/2013	J.S

Drawn by	Date	Checked by	Date	Approved by	Date
A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013

TE092703-2

Additional considerations can be found at www.dbunlimitedco.com/technical-articles.

©2013, DB Unlimited