MODEL TL-2100


International size reference: AA, ER14505

TADIRAN LITHIUM BATTERIES

TECHNICAL DATA


(Typical values @+25ºC for batteries stored for one year or less)


Nominal capacity @ 2 mA, to 2V	2.1 Ah
Rated voltage	3.6 V
Maximum recommended continuous current	120 mA
Maximum pulse current capability	200 mA
Weight	17.6g (0.62 oz)
Volume	8 cc
Operating temperature range	-55ºC to +85ºC
U.L. Component Recognition, MH 12193	

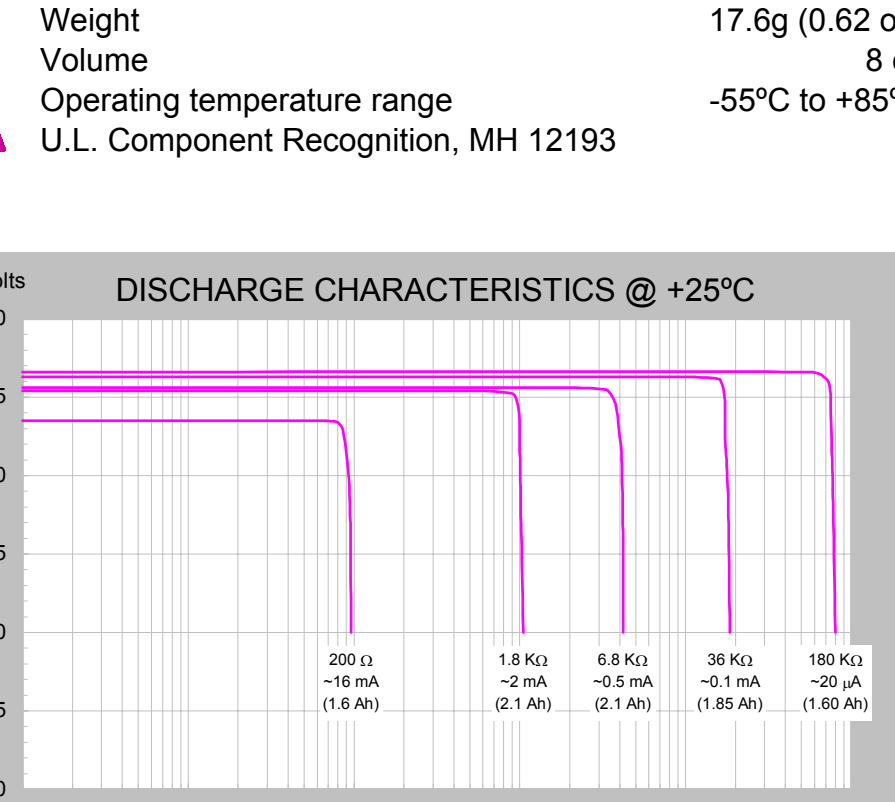

AVAILABLE TERMINATIONS

SUFFIX- /S STANDARD	15-5103-21500
SUFFIX- /T SOLDER TABS	15-5103-31500
SUFFIX- /P AXIAL PINS	15-5103-41500
SUFFIX- /PT2 RADIAL PINS	15-5103-36500
SUFFIX- /TP POLARIZED TABS	15-5103-52500
SUFFIX- /PT POLARIZED TABS	15-5103-53500

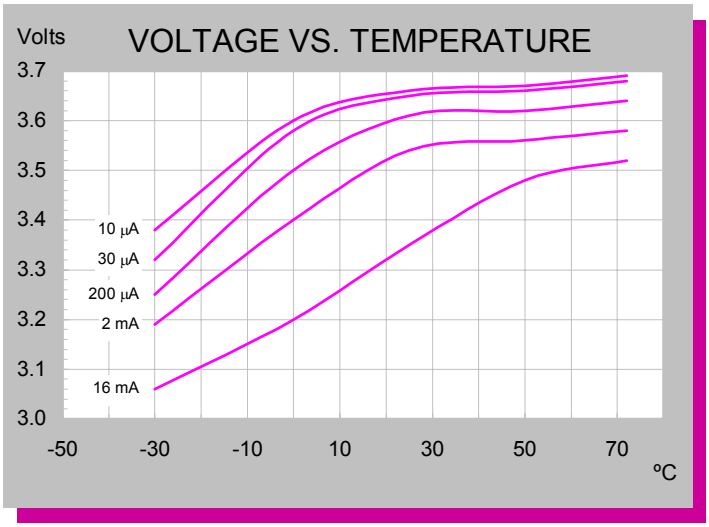

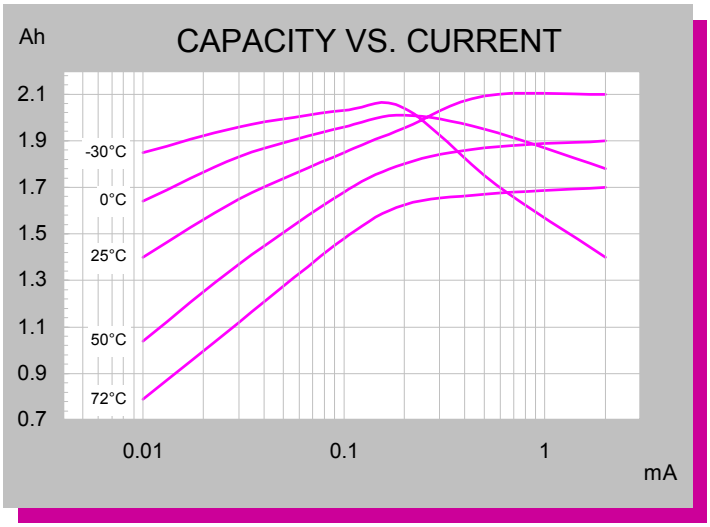

LITHIUM XTRA

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

Rev. B 04/03