4 PIN DIP PHOTOTRANSISTOR PHOTOCOUPLER

FEATURES

- Current transfer ratio
  (CTR: MIN.80% at I_F=5mA, V_{CE}=5V)
- High isolation voltage between input and output (Viso=5000V rms)
- Creepage distance＞7.62mm
- UL Recognized File # E478892
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21
- Packing code with suffix "G" means green compound (halogen-free)




DIP-4 **DIP-4M** **SOP-4**

Pb-Free

RoHS COMPLIANT





APPLICATIONS

- Programmable controllers
- System appliances,measuring instruments
- Telecommunication equipments
- Home appliances,such as fan heaters,etc
- Signal transmission between circuits of different potentials And impedances

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)				
PARAMETER		SYMBOL	RATING	UNIT
Input	Forward current	I_F	50	mA
	Reverse voltage	V_R	6	V
	Power dissipation	P	70	mW
Output	Collector-emitter voltage	V_{CEO}	80	V
	Emitter-collector voltage	V_{ECO}	6	V
	Collector current	I_C	50	mA
	Collector power dissipation	P_C	150	mW
Total power dissipation		P_{tot}	200	mW
Isolation voltage		V_{iso}	5000	Vrms
Rated impulse isolation voltage		V_{IOTM}	6000	V
Rated repetitive peak isolation voltage		V_{IORM}	630	V
Operating temperature		T_{opr}	-40 to +125	°C
Storage temperature		T_{stg}	-55 to +125	°C
Soldering temperature		T_{sol}	260	°C

ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)								
PARAMETER			SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Input	Forward voltage		V_F	I_F=20mA	-	1.2	1.4	V
	Reverse current		I_R	V_R=4V	-	-	10	μA
	Terminal capacitance		C_t	V=0, f=1kHz	-	30	250	pF
Output	Collector dark current		I_{CEO}	V_{CE}=20V, I_F=0	-	-	100	nA
	Collector-emitter breakdown voltage		BV_{CEO}	I_C=0.1mA, I_F=0	80	-	-	V
	Emitter-collector breakdown voltage		BV_{ECO}	I_E=10μA, I_F=0	6	-	-	V
Transfer Characteristics	Collector current		I_C	I_F=5mA, V_{CE}=5V	2.5	-	30	mA
	Current transfer ration		CTR		80	-	600	%
	Collector-emitter saturation voltage		$V_{CE(sat)}$	I_F=20mA, I_C=1mA	-	0.1	0.2	V
	Isolation resistance		R_{ISO}	DC500V, 40 to 60%RH	$5x10^{10}$	10^{11}	-	Ω
	Floating capacitance		C_f	V=0, f=1MHz	-	0.6	1.0	pF
	Cut-off frequency		f_c	V_{CE}=5V, I_C=2mA, R_L=100Ω, -3dB	-	80	-	KHz
	Response time	Rise time	t_r	V_{CE}=2V, I_C=2mA, R_L=100Ω	-	4	18	μs
		Fall time	t_f		-	3	18	μs

Note 4: Classification table of current transfer ratio is shown below

RANK TABLE OF CURRENT TRANSFER RATIO, CTR

RANK MARK	MIN (%)	MAX (%)
A	80	160
B	130	260
C	200	400
D	300	600

ORDERING INFORMATION				
PART NO. (Note 1, 2)	PACKING CODE	PACKING CODE SUFFIX	PACKAGE	PACKING
TPC817x	C9	G	DIP-4	100 / TUBE
TPC817Mx	C9		DIP-4M (Leads with 0.4" spacing)	100 / TUBE
TPC817S1x	RA		SOP-4	2K / 13" Reel

Note 1: "x" defines CTR rank from "A" to "D"

Note 2: Whole series with green compound

EXAMPLE				
PREFERRED P/N	PART NO.	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
TPC817A C9G	TPC817A	C9	G	Green compound

MARKING



Note:
817: Product type
B: CTR rank mark
YWW: Date code

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES

(T_A=25°C unless otherwise noted)

Fig. 1 Forward Current vs. Ambient Temperature

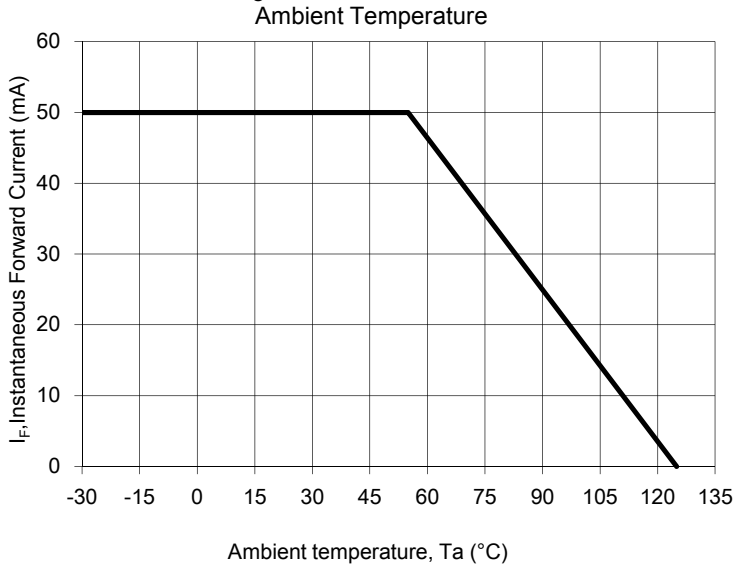


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

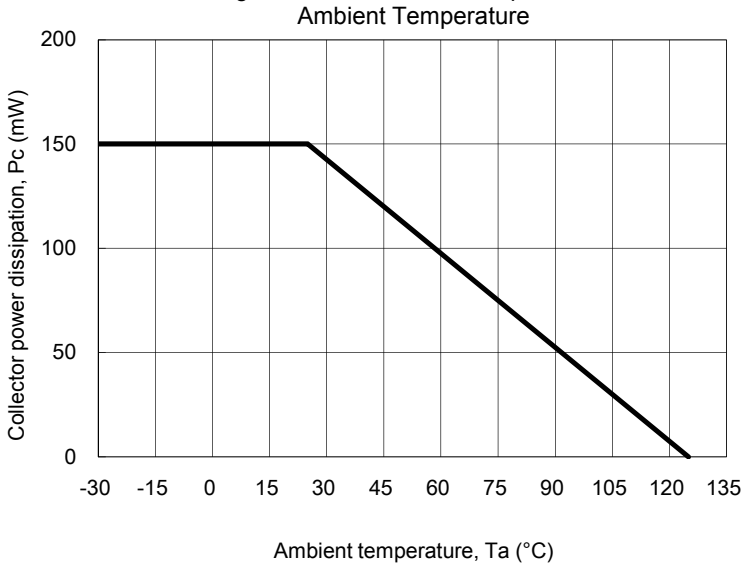


Fig. 3 Collector-emitter Saturation Voltage vs

Fig. 4 Forward Current vs. Forward Voltage

Fig. 5 Current Transfer Ratio vs. Forward Current

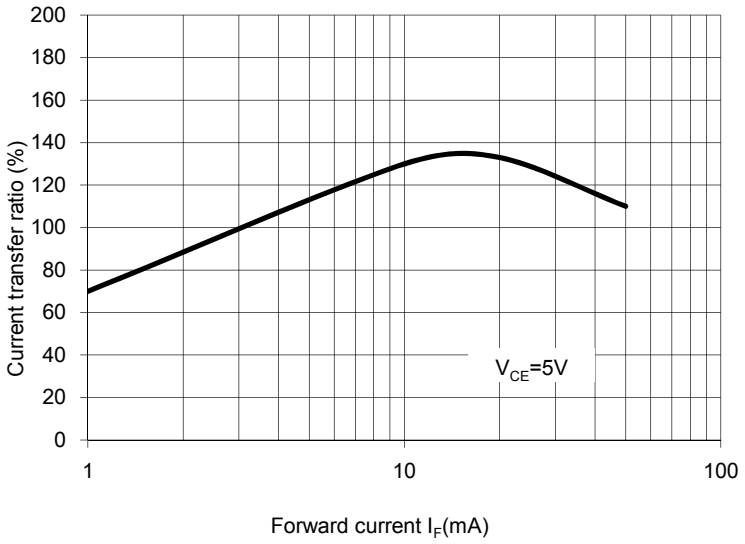


Fig. 6 Collector Current vs. Collector-emitter Voltage

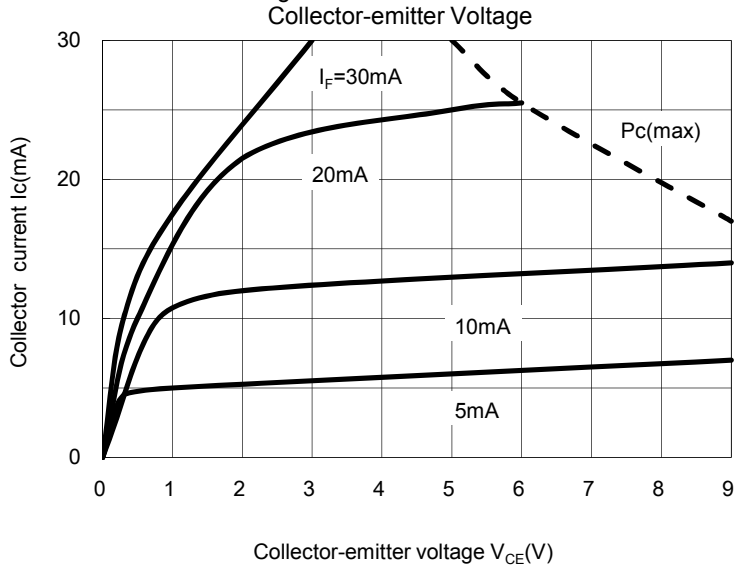


Fig. 7 Relative Current Transfer Ratio vs. Ambient Temperature

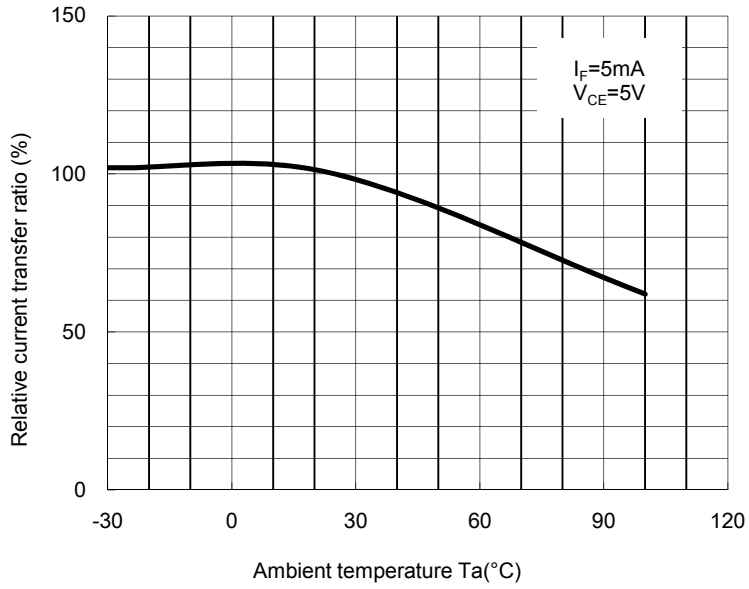


Fig. 8 Collector-emitter Saturation Voltage vs Ambient Temperature

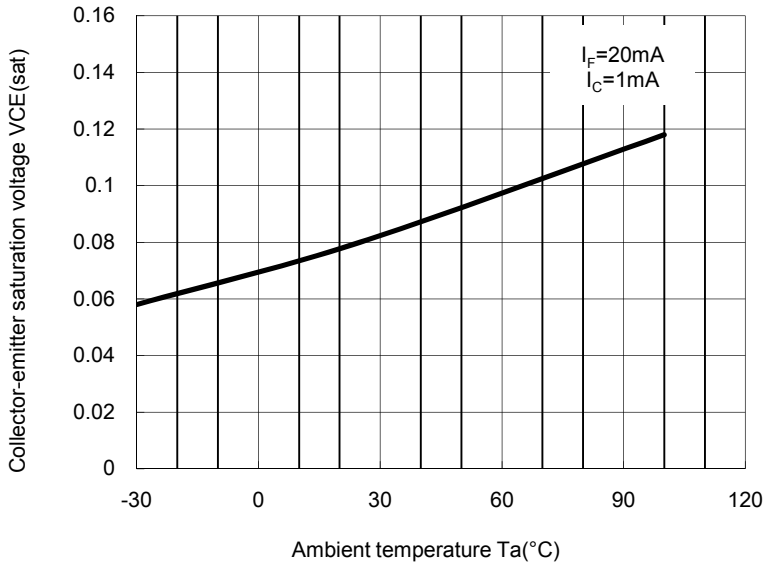


Fig. 9 Collector Dark Current vs. Ambient temperature

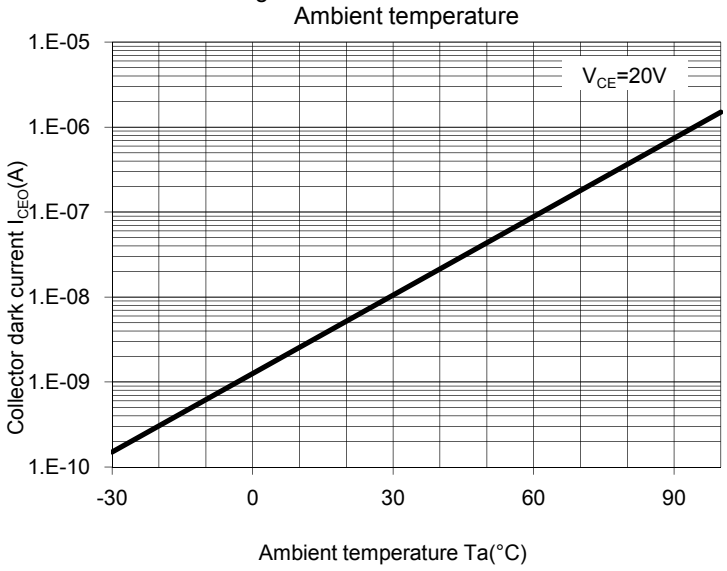


Fig. 10 Response Time vs. Load Resistance



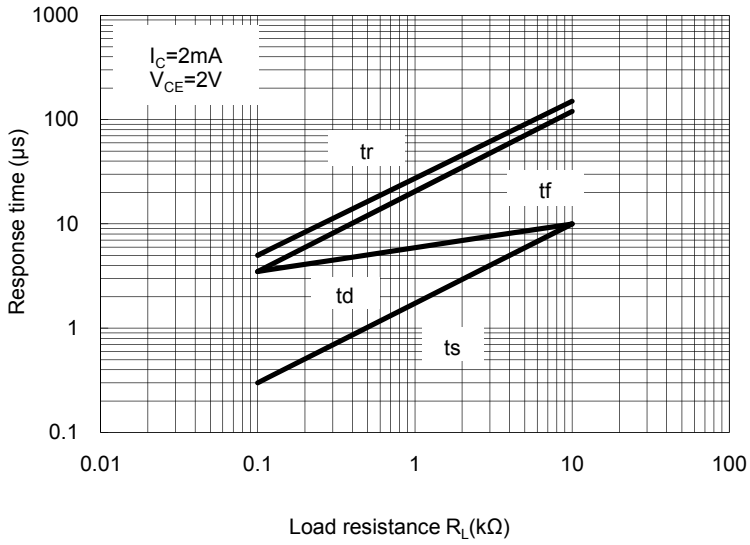



Fig. 11Frequency Response

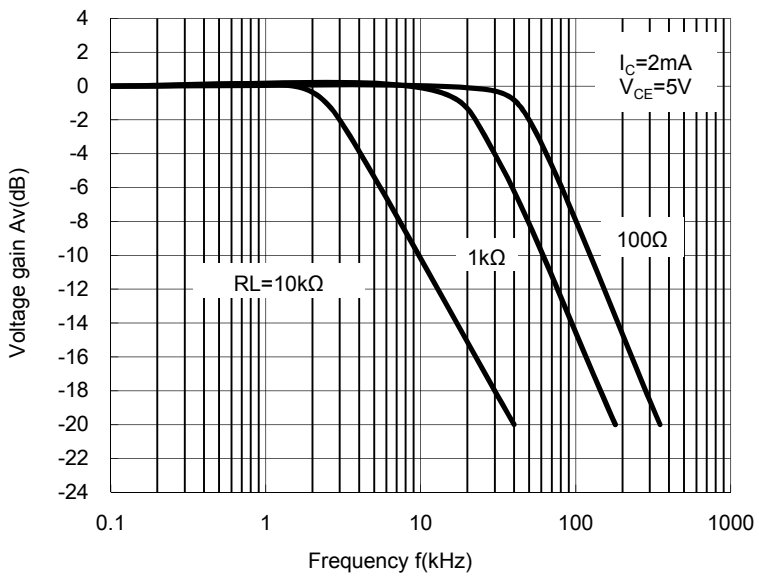

Test Circuit Response Time

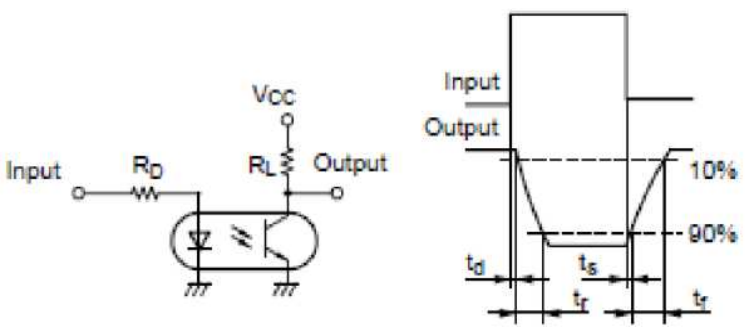


Test Circuit for Frequency Response

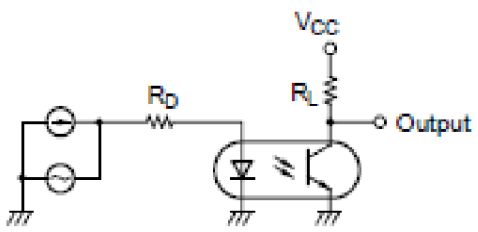


DIMENSIONS

DIP-4

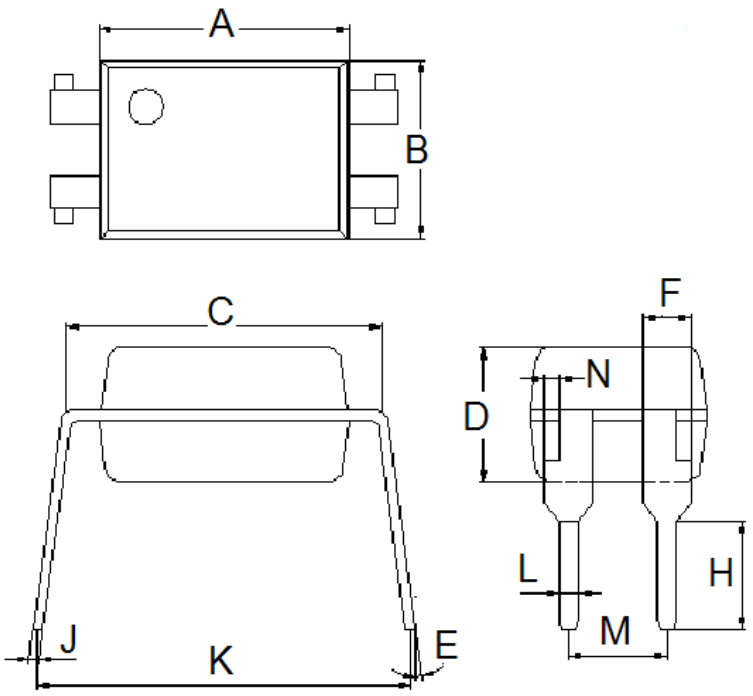


DIM.	Unit (mm)	
	Min	Max
A	6.40	6.60
B	4.50	4.70
C	7.90	8.30
D	3.28	3.68
E	2°	8°
F	1.25 typ.	
H	2.70	2.90
J	0.23	0.26
K	8.86	9.31
L	0.50 typ.	
M	2.44	2.64
N	0.40 typ.	

DIP-4M (Leads with 0.4" spacing)

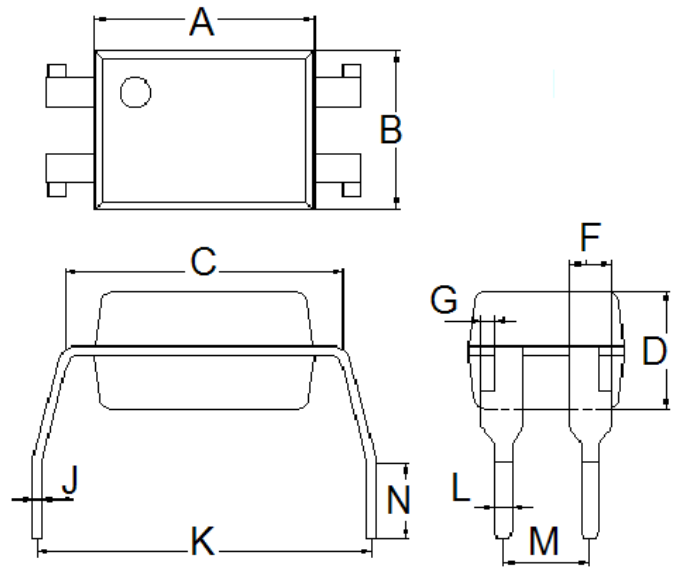

DIM.	Unit (mm)	
	Min	Max
A	6.40	6.60
B	4.50	4.70
C	7.90	8.30
D	3.28	3.68
F	1.25 typ.	
G	0.40 typ.	
J	0.23	0.26
K	9.86	10.46
L	0.50 typ.	
M	2.44	2.64
N	2.08	2.48

SOP-4

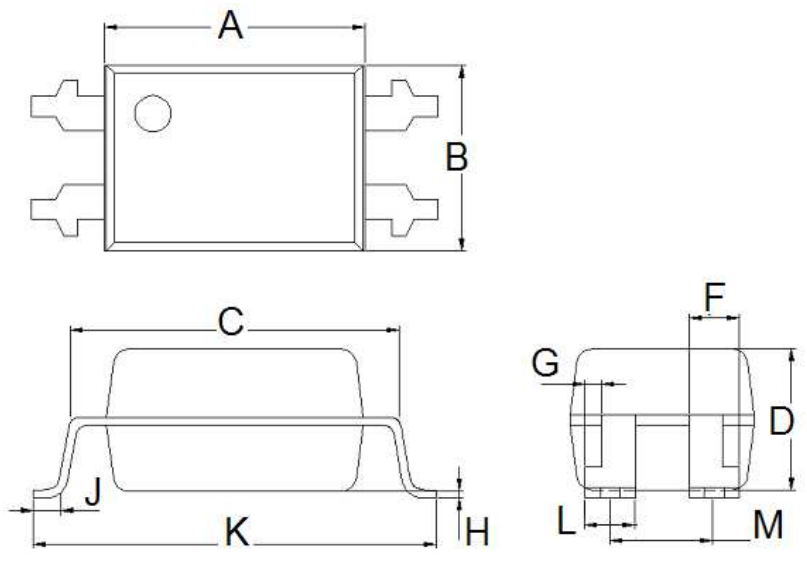

DIM.	Unit (mm)	
	Min	Max
A	6.40	6.60
B	4.50	4.70
C	7.90	8.30
D	3.28	3.68
F	1.25 typ.	
G	0.40 typ.	
H	0.00	0.20
J	0.50	0.70
K	9.80	10.30
L	1.25 typ.	
M	2.49	2.69

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.