REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial release	2020/08/26	Ruru	Old Item No. UC-31PFFP-QS8001
B	C220027	2022/01/11	Scott	△B XI.
C	C220621	2022/04/20	Scott	△C XI.



比例 1:1

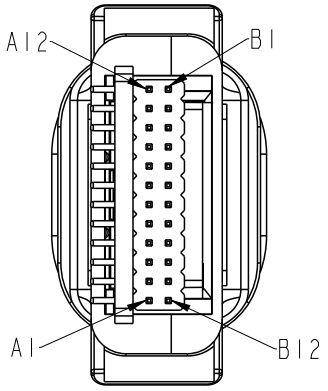

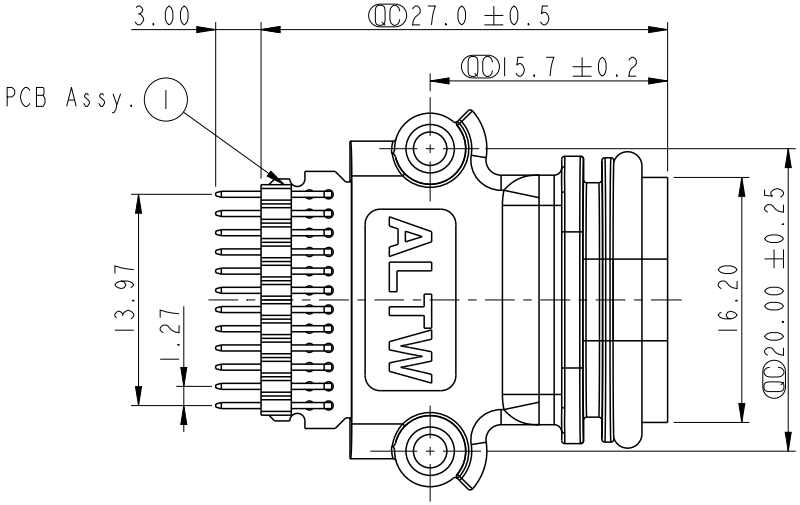

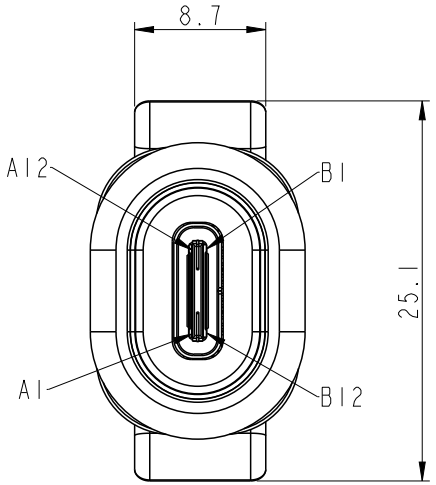

Detail A(2:1)



Measure 量測位置:
End of this PIN center.
端子尾端中心點

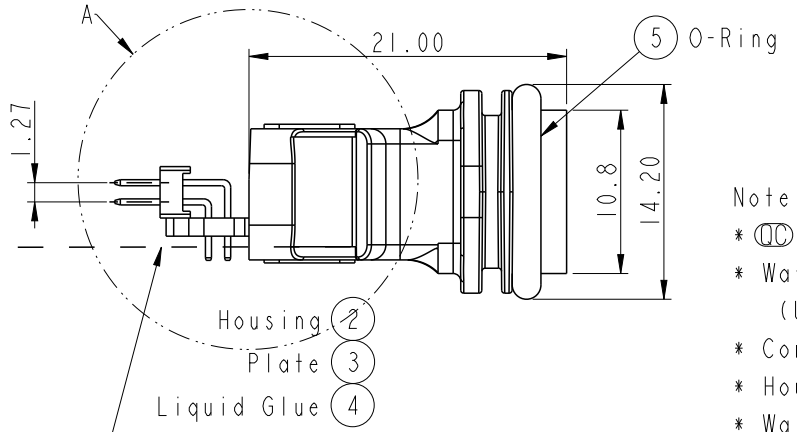

Note:
* QC Important Dimension
* Waterproof Rate: IP68(Unmated)
  (Under water 1M, 24H)
* Connector: USB Type C Female
* Housing: Thermoplastic, UL94 V-0,FI, Black
* Wafer: 24Pin Header, Dual Row, Pitch=1.27mm
* O-Ring: Rubber, Gray
* Panel Thickness max: 4.0mm
* All Parts Are RoHS Compliant

UNIT:mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: USB, C TYPE, FRONT FASTENED F, F, PCB S, QUICK

SCALE 2:1 | SIZE A4 | SHEET 1 OF 2
REV. C | WC-REV. A.28 | QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
UC-00PFFP-QS8001	Ruru	2020-08-26
DWG NO	CHECKED BY	DATE
UC-00PFFP-QS8001	Rita	2020-08-26
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2020-08-26

WI0814-03-RW01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Recommended Panel Cut-Out

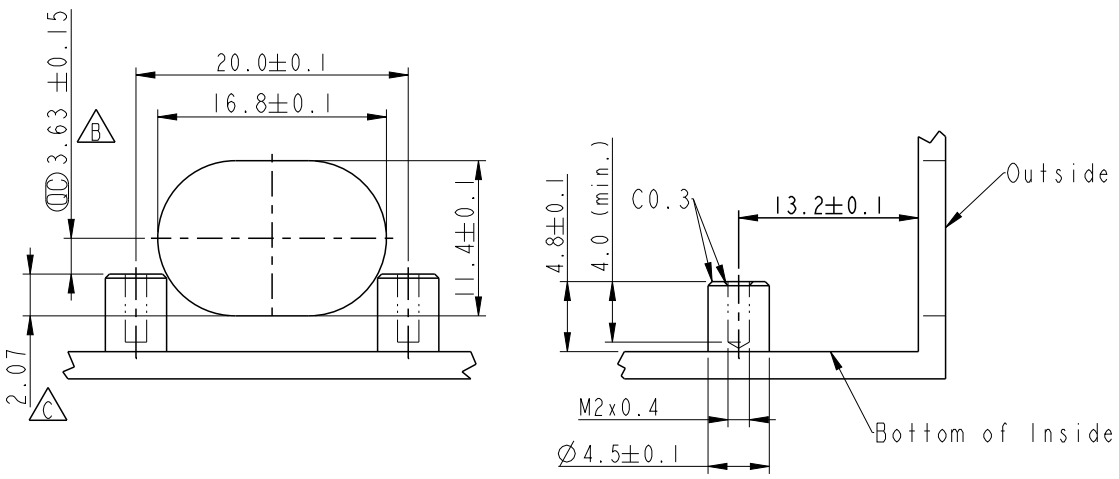

Installation.

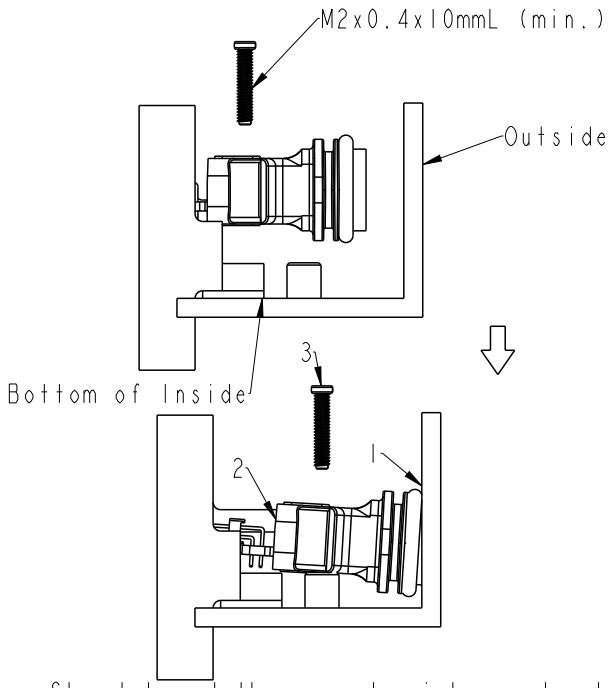

Step 1.Insert the connector into panel-cut by slanted angle.
Step 2.The connector incline downward and engage to screw post.
Step 3.Fastening the screws to fix the connector.

第一步：連接器以傾斜角度插入內孔
第二步：將連接器斜往下壓，與螺絲軸孔卡合
第三步：鎖上螺絲固定



Finished 完成

Packing Instructions.

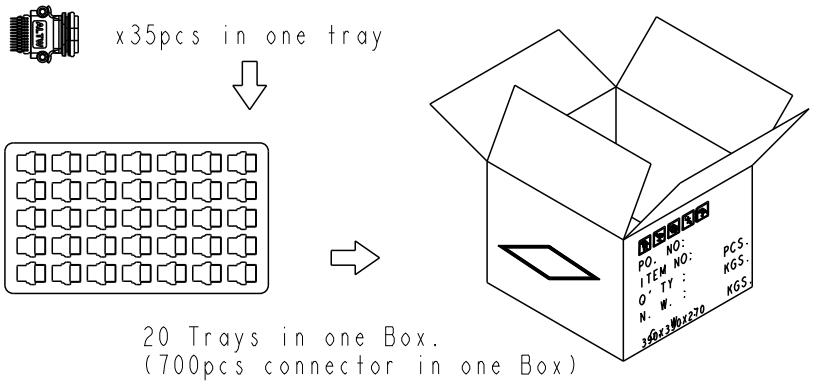

UNIT: mm	TITLE: USB, C TYPE, FRONT FASTENED F, F, PCB S, QUICK		ITEM NO: UC-00PFFP-QS8001	DRAWN BY: Ruru	DATE: 2020-08-26
TOLERANCE .X ±0.25, .XX ±0.1, .XXX ±0.05, ANGLES ±1°	SCALE: 2:1	SIZE: A4	DWG NO: UC-00PFFP-QS8001	CHECKED BY: Rita	DATE: 2020-08-26
	REV.: C	WC-REV.: A.28	CUSTOMER: ALTW	APPROVED BY: Max	DATE: 2020-08-26
	SHEET: 2 OF 2	(QC): Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.