

UF25HC series



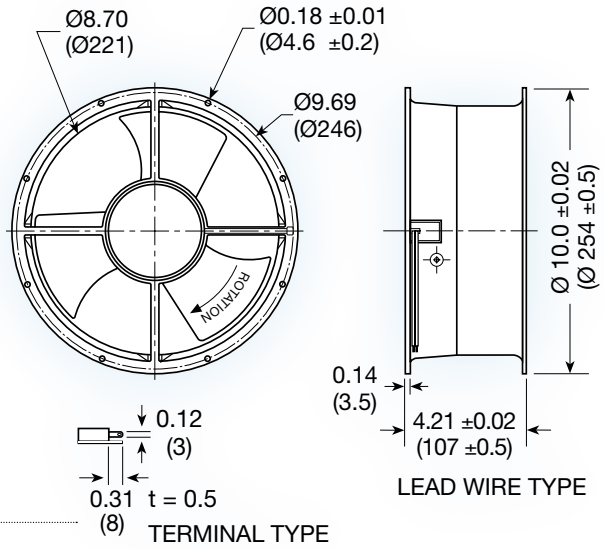

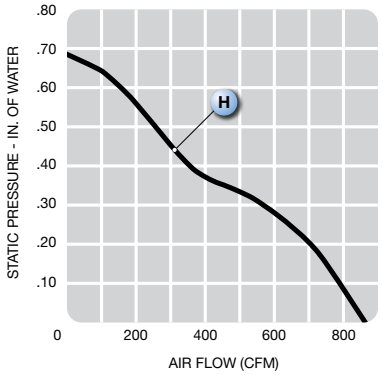

(254 dia. x 107 mm)

10.0 dia. x 4.21 inches

Operating voltage:	115 or 230 VAC
Construction:	aluminum die cast frame; UL94V-0 PBT impeller
Bearing option:	ball bearing
Motor:	permanent split capacitor
Air Flow:	exhaust over struts
Connection:	terminal or 22 AWG lead wire
Protection:	thermal
Option:	dual voltage 115/130VAC

Model No.	Rated Voltage	Freq.	Input Power	Rated Cur.	Locked Cur.	Speed	Air Volume		Max. Static Pressure (H_2O)		Sound Noise	Weight
	V	HZ	W	A	A	RPM	M^3/Min.	CFM	MM	INCH	dbA	kg
UF25HC12-_ _H	115	60	125	1.07	1.50	2,750	24	850	17.5	0.68	65	2.50
UF25HC23-_ _H	230	60	125	0.50	0.75	2,750	24	850	17.5	0.68	65	2.50