
UF92B series




(92 x 92 x 25 mm)

3.62 x 3.62 x 0.98 inches

Operating voltage:	115 or 230 VAC
Construction:	aluminum die cast frame; UL94V-0 PBT impeller
Bearing option:	ball bearing or sintered bronze sleeve
Motor:	shaded pole
Air Flow:	exhaust over struts
Connection:	terminal or 22 AWG lead wire
Protection:	impedance
Option:	dual voltage 115/230VAC

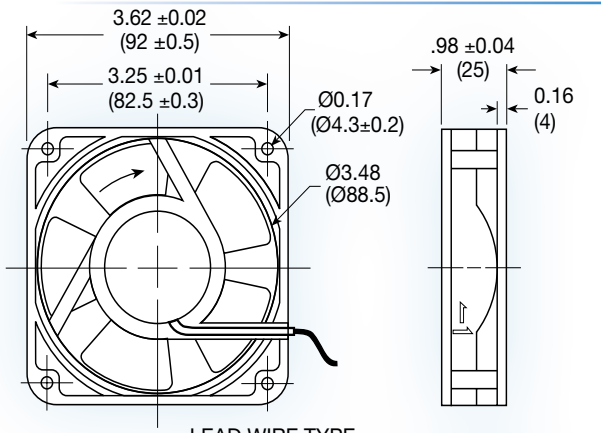

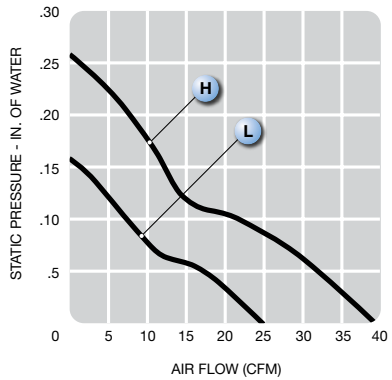

Model No.	Rated Voltage	Freq.	Input Power	Rated Cur.	Locked Cur.	Speed	Air Volume		Max. Static Pressure (H_2O)		Sound Noise	Weight
	V	HZ	W	A	A	RPM	M^3/Min.	CFM	MM	INCH	dbA	kg
UF92B12-_ _H	115	60	11	0.12	0.13	3,000	1.13	40	6.5	0.26	36	0.28
UF92B23-_ _H	230	60	14	0.07	0.08	3,000	1,13	40	6.5	0.26	36	0.28
UF92B12-_ _L	115	60	11	0.11	0.12	2,300	0.70	25	4.0	0.16	32	0.28
UF92B23-_ _L	230	60	14	0.06	0.07	2,300	0.70	25	4.0	0.16	32	0.28