





1

2

3


4

5

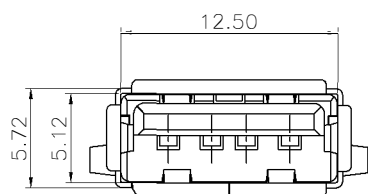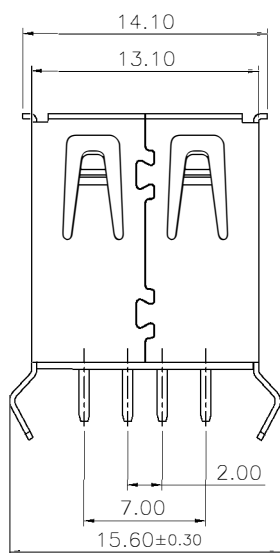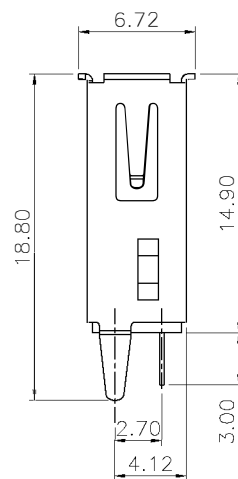

Specifications:

Current Rating: 1.0A AC/DC
 Voltage Rating: 30V AC/DC
 Contact Resistance: 30m ohm. Max.
 Insulation Resistance: 1,000M ohm. min.
 Withstanding Voltage: 500V AC For One Minute
 Operating Temperature Range: -40°C ~ +105°C



Material And Finish

Insulator: PBT (UL94V-0)
 Contact: Phosphor Bronze
 Plating: Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell: Brass, Nickel Plated

How To Order

USB-A1VSXX149


6: Gold Plated on Contact Area

7: Selective Gold Plated 15u"

8: Selective Gold Plated 30u"

B: Black

W: White

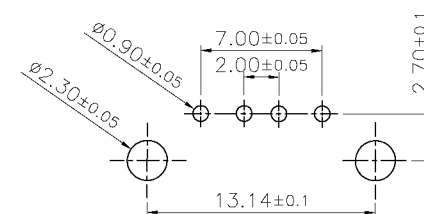

P.C.B Layout

RoHS Compliant

F				DRAWN: Jack Huang	GENERAL TOLERANCE: .X=±0.20 .XX=±0.10	<div>OST</div> ON-SHORE TECHNOLOGY, INC.		
E								
D								
C				CHECKED: Jerry Chen	UNIT: MM	DESCRIPTION: USB A Type PCB Socket Top Entry	SIZE	
B	15-SEP-2021	Change Tray icon	Lisy Liu		SCALE: 1:1			
A	15-NOV-2018		Jack Huang	APPROVAL: Mike Wu	SHEET: 1/2	PART NO: USB-A1VSXX 149		
REV	DATE	FILE	BY		PROJECTION: 			