

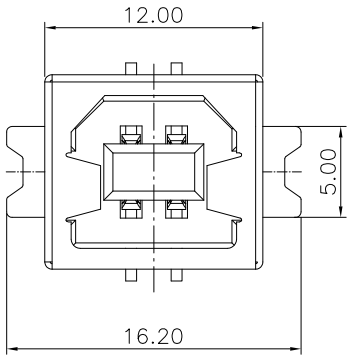


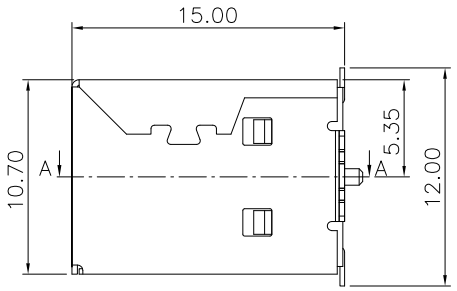


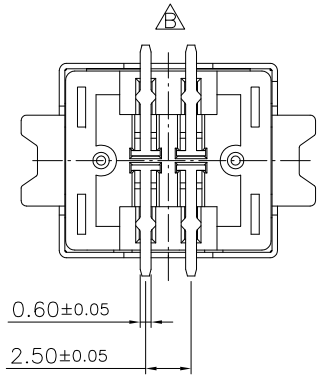



Specifications:
Current Rating:1.0A AC/DC
Voltage Rating:30V AC/DC
Contact Resistance:20m ohm.Max.
Insulation Resistance:1000M ohm.Min.
Withstanding Voltage:750V AC/Minute
Operating Temperature Range:−40°C To +105°C

Material and Finish:
Insulator:Nylon6T(UL94V−0)
Contact:Phosphor Bronze
Plating:Gold Plated on Contact Area,
Tin Plated on Solder Tail.
Shell:Brass, Nickel plated

How To Order
USB−B1SMVSXX
- 6: Gold Flash
- 8: 30u: Gold
- B: Black
- W: White

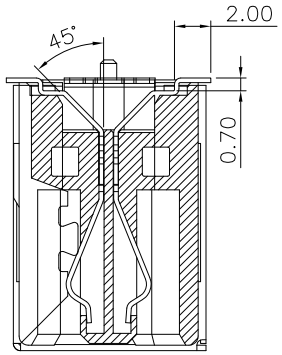

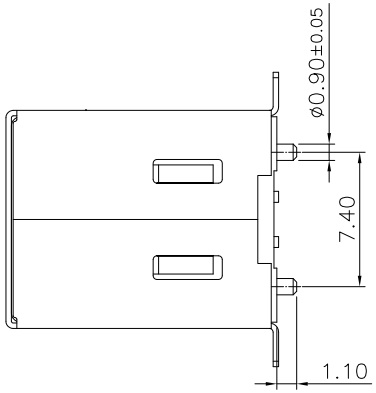

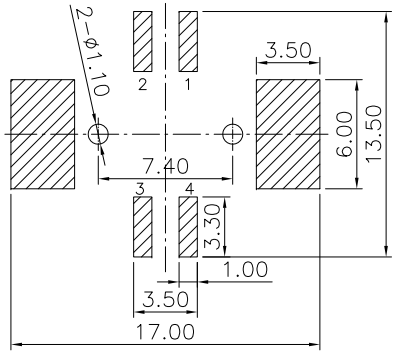

P.C.B Layout

RoHS Compliant

REV	DATE	FILE	BY
F			
E			
D			
C	10−APR−2020	□□□□□	Lisy
B	25−JUN−2009	ECN−CN090619	WXY
A	23−JUL−2008		Leo

DRAWN: Leo
CHECKED: Jeremy Liu
APPROVAL: Mike Wu

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.15


UNIT: MM
SCALE:
SHEET: 1/2
PROJECTION:


ON−SHORE TECHNOLOGY, INC.


DESCRIPTION: USB B Type PCB Female Straight, SMT


PART NO: USB−B1SMVSXX


SIZE: D










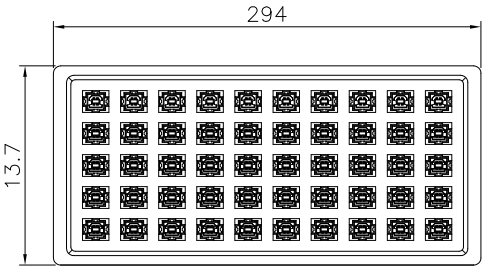


Note:
1.Dimension:
Tray Size: 294(L)X137(W)X17(H) (mm)
Carton Size:320X290X380(mm)
2.Quantity:
30 Tray/Carton

Pin.	Pcs/Tray	Tray/Carton	Pcs/Carton
04	50	30	1500



30 Trays



Carton

RoHS Compliant

REV	DATE	FILE	BY
F			
E			
D			
C	10-APR-2020	□□□□□	Lisy
B	25-JUN-2009	ECN-CN090619	WXY
A	23-JUL-2008		Leo

DRAWN: Leo
CHECKED: Jeremy Liu
APPROVAL: Mike Wu

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.15
UNIT: MM
SCALE:
SHEET: 2/2
PROJECTION:

ON-SHORE TECHNOLOGY, INC.

DESCRIPTION: USB B Type PCB Female Straight Tray Packing List

SIZE: D

PART NO: USB-B1SMVSXX