
Self-adjusting Crimping Pliers
with front loading mechanism for ferrules (end sleeves)

97
53

- for crimping ferrules (end sleeves) according to DIN 46228 parts 1 + 4
- self-adjusting adaptation to the desired wire ferrule (end sleeves) size: no crimping faults caused by using the wrong die
- front-loading of the ferrules (end sleeves) into the tool
- repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- crimping pressure has been set precisely (calibrated) in the factory
- optimum transmission of force due to toggle lever for fatigue-reduced operation
- high operation comfort due to handle shape and low weight
- chrome vanadium electric steel in special quality; oil-hardened




97 53 08



97 53 08
Crimping from 28 - 8 AWG (0.08 - 10.0 mm²) in one profile; wire ferrules (end sleeves) up to 14 AWG (2.5 mm²) can also be loaded parallel from the side; particularly suitable for all twin ferrules (end sleeves) up to 2 x 4 mm² or 2 x AWG 10





97 53 09

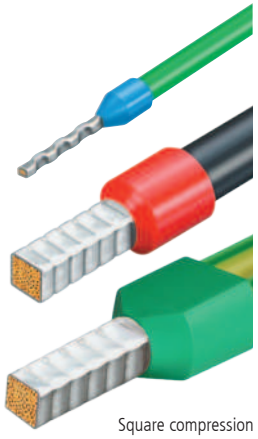


97 53 09
Crimping from 28 - 8 and 6 AWG (0.08 - 10.0 and 16.0 mm²) in one profile; with selector lever for setting the crimping area either to 28 - 8 and 6 AWG (0.08 - 10 mm² or 16 mm²); particularly suitable for all twin ferrules (end sleeves) up to 2 x 6 mm² or 2 x AWG 8


Square crimping


Front-loading of ferrules (end sleeves) e.g. in switchboards


97 53 08: Lateral loading of ferrules (end sleeves) up to 14 AWG (2.5 mm²) parallel from the side e.g. in confined areas


Square compression

The crimping pliers for wire ferrules (end sleeves) with three great advantages for the user:
> Automatic self-adjustment to the wire ferrules (end sleeves): This allowing the professional to work with less strain and enables secure, reliable and quick crimping
> Range of applications for large cross-sections: crimping 28 - 8 and 6 AWG (0.08 to 10.0 + 16.0 mm²)
> Front-loading: very helpful under difficult working conditions in confined spaces

WARNING: This product can expose you to chemicals including Diisononyl Phthalate, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov

Product Number	Packaging	↔ Inch mm			Pliers	Handles	Applications	Capacity mm²	AWG	Number of crimping positions	⚖ lbs
97 53 08	X	7 1/2 190			burnished	multi-component grips	Ferrules (end sleeves)	0.08 - 10	28 - 8	1	1.05
97 53 09		7 1/2 190			burnished	multi-component grips	Ferrules (end sleeves)	0.08 - 10 and 16	28 - 8 and 6	1	1.07