


Heyco® Universal Bushings

Mounting Hole Diameter Range: .500″ (12,7 mm) to 3.000″ (76,2 mm)

- **Flexible shutters adjust to accommodate and support any shape** from .125″ (3,2 mm) to a maximum cable/bundle diameter of 2.470″ (62,7 mm).
- Absorb vibration and cushion and insulate cables, tubing, hoses or shafts.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Fingertip pressure snap-locks the bushing into its mounting hole.

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS					
					Maximum Cable/ Bundle Diameter		A Head Diameter		B Overall Height	
in.	mm.	Black	White		in.	mm.	in.	mm.	in.	mm.
Multiple Locking Steps for Panel Thickness up to .125″ (3,2 mm)										
.500	12,7	**2055**	**2056**	UB 500	.31	7,6	.60	15,2	.39	9,8
.625	15,9	**2077**	**2076**	UB 625	.44	11,1	.73	18,5	.41	10,3
.750	19,1	**2089**	**2085**	UB 750	.50	12,7	.84	21,4	.39	9,9
.812	20,6	**2106**	**2107**	UB 812	.50	12,7	.89	22,6		
.875	22,2	**2119**	**2129**	UB 875	.56	14,3	.94	23,8	.45	11,5
		2118	–	UB 875-112*						
1.000	25,4	**2137**	**2138**	UB 1000	.75	19,1	1.06	27,0	.44	11,2
1.093	27,8	**2157**	**2162**	UB 1093	.81	20,6	1.16	29,5	.45	11,5
1.187	30,2	**2153**	**2154**	UB 1187	.95	24,1	1.25	31,8		
1.250	31,8	**2155**	**2156**	UB 1250	1.02	25,8	1.31	33,4		
1.375	34,9	**2184**	**2185**	UB 1375	1.00	25,4	1.49	37,8		
		2187	–	UB 1375-1750	1.00	25,4	1.75	44,5		
1.500	38,1	**2213**	**2214**	UB 1500	1.06	26,9	1.61	40,9		
1.750	44,5	**2298**	**2299**	UB 1750	1.38	34,9	1.87	47,5	.47	11,8
2.000	50,8	**2422**	**2423**	UB 2000	1.64	41,6	2.13	54,0	.49	12,4
Multiple Locking Steps for Panel Thickness up to .250″ (6,4 mm)										
2.500	63,5	**2440**	**2441**	UB 2.500	1.97	50,0	2.63	66,8	.75	19,05
3.000	76,2	**2460**	**2463**	UB 3.000	2.47	62,7	3.15	80,0		

Standard colors black and white. Consult Heyco for other colors.
*UB 875-112 inside diameter adjusts for 1/8″ to 5/8″ cables; UB 875 adjusts for 3/16″ to 9/16″ cables.

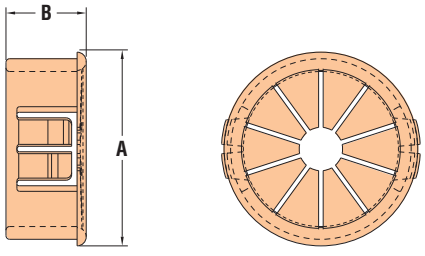

Quick Specs

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E15331
	Certified by Canadian Standards Association, File 8919
Flammability Rating	94V-2
Temperature Range	-.4°F (-18°C) to 221°F (105°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com