

Heyco® Snap-In Universal Strain Relief Bushings

Fit 1/2˝ Electrical Knock-out Hole

WILL FIT THESE CABLES			PANEL DIMENSIONS						PART NO.	DESCRIPTION	SCREW TYPE
Cross Section	Approximate Size		A Mounting Hole Dia.		B To Prevent Rotation		Panel Thickness		Black		
	in.	mm.	in.	mm.	in.	mm.	in.	mm.			
Round or Flat	up to .360	up to 9,1	.875	22,2	.770	19,6	.062 .125	1,6 3,2	**1724** **1730**	USR-400 USR-40	nylon steel

Standard color black. Consult Heyco for white and other colors.

- **USR 400 fits the widest range of cable sizes**.
- USR 401 fits the widest range of Romex® and other **flat** cable sizes.
- Captive screw forces the locking flap against the cable.
- Captive screw meets typical European requirements wherein the Strain Relief device must remain attached to the panel during cable removal or replacement.
- Nylon USR 400 & 401 comply with:
  – IEC Publication #335
  – CEE #10 and # 11
- Easy installation: fingertip pressure locks bushing into .875˝ (22,2 mm) diameter holes with panel thickness up to .125˝ (3,2 mm).
- Reinforcing ribs for extra strength.
- Bell mouth contour, radiused at 1.5x the exit hole diameter, eliminates the need for a separate cord guard.
- Protect cables against forces of pull, push, twist, and flex.
- **For Heyco-Tite Liquid Tight Romex® Connectors, see page 3-16**.
- For Double D Mounting Hole Punches, see page 4-30.


Heyco® Snap-In Romex® Strain Relief Bushing*

Fits 1/2˝ Electrical Knock-out Hole

WILL FIT THESE CABLES				PANEL DIMENSIONS						PART NO.	DESCRIPTION	SCREW TYPE
Romex Type	AWG/ Conds	Approximate Size		A Mounting Hole Dia.		B To Prevent Rotation		Panel Thickness		Black		
		in.	mm.	in.	mm.	in.	mm.	in.	mm.			
NM-B	14/2, 14/3, 12/2, 12/3, 10/2	up to .250 x .400	up to 6,4 x 10,2	.875	22,2	.770	19,6	.062 .125	1,6 3,2	**1726**	USR-401	nylon

Standard color black. Consult Heyco for white and other colors.
*For Romex® and other flat cables.



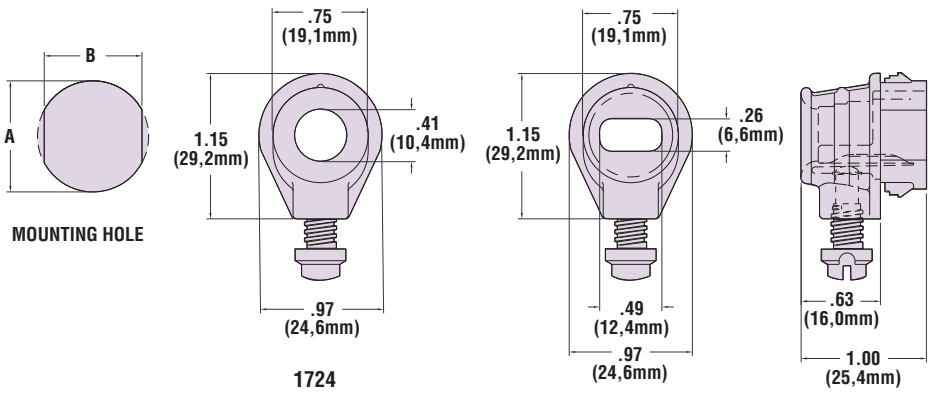

Material	Nylon 6/6
Certifications	Recognized File E15331 for round and flat SPT type cables
	Listed under Underwriters' Laboratories File E103540
	Certified by the Canadian Standards Association File 81067
Flammability Rating	94V-2
Temperature Range	-.04°F (-18°C) to 221°F (105°C)

Quick Specs

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com