MFG. ENG.	APPROVED BY:	DATE:	QA	APPROVED BY:	DATE:

CUSTOMER PRINT

PART NUMBER: W16982-XPG-P-5XX


NOTES:

1. ALL PARTS ARE BULK PACKED.
2. REFER TO DRAWING HPMCSTD FOR CONTACT PATTERNS.
3. ALL DIMENSIONS ARE REFERENCE ONLY IN INCHES [mm], WITHIN ±0.015 UNLESS OTHERWISE NOTED.


ASS'Y P/N	CONTACT QTY.	CABLE O.D. RANGE
W16982-5PG-P-518	5	0.18 - 0.20 [4.6 - 5.1]
W16982-5PG-P-521	5	0.21 - 0.22 [5.3 - 5.6]
W16982-5PG-P-522	5	0.22 - 0.23 [5.6 - 5.8]
W16982-6PG-P-518	6	0.18 - 0.20 [4.6 - 5.1]
W16982-6PG-P-521	6	0.21 - 0.22 [5.3 - 5.6]
W16982-6PG-P-522	6	0.22 - 0.23 [5.6 - 5.8]
W16982-7PG-P-518	7	0.18 - 0.20 [4.6 - 5.1]
W16982-7PG-P-521	7	0.21 - 0.22 [5.3 - 5.6]
W16982-7PG-P-522	7	0.22 - 0.23 [5.6 - 5.8]
W16982-XPG-P-5XX		

OF CONTACTS


GROMMET SIZE = CABLE O.D. RANGE:
518 = 0.18 - 0.20 [4.6 - 5.1]
521 = 0.21 - 0.22 [5.3 - 5.6]
522 = 0.22 - 0.23 [5.6 - 5.8]




FACE VIEW
W16982-5PG-P-5XX
5 POSITION
A-KEY

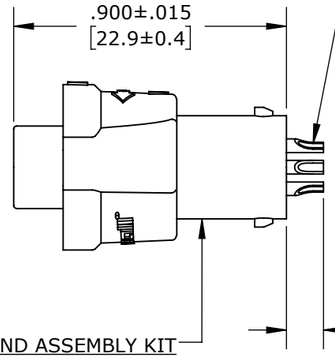


CABLE-END ASSEMBLY KIT
MAT'L: HOUSING -THERMOPLASTIC, BLACK
O-RING - SILICONE, RED
COUPLING RING - THERMOPLASTIC, BLACK
SPRING (INTERNAL) - STAINLESS STEEL

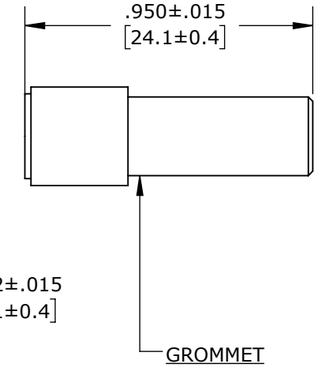


GROMMET
MAT'L: ELASTOMER,BLACK
SEE TABLE FOR CABLE O.D. SIZE OPTIONS

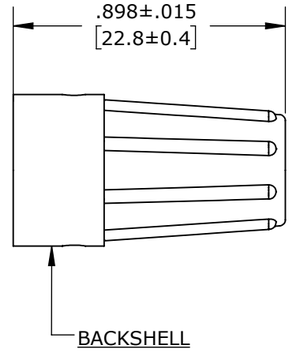


BACKSHELL
MAT'L: THERMOPLASTIC, BLACK




WIRING VIEW
W16982-5PG-P-5XX




FACE VIEW
W16982-6PG-P-5XX
6 POSITION
B-KEY

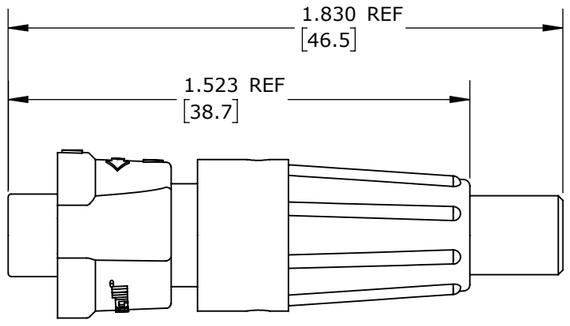


ASSEMBLED VIEW
FOR CUSTOMER REF. ONLY

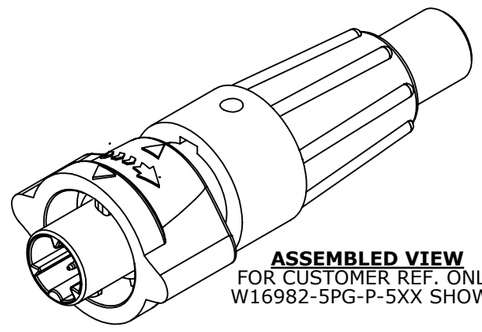


ASSEMBLED VIEW
FOR CUSTOMER REF. ONLY
W16982-5PG-P-5XX SHOWN



WIRING VIEW
W16982-6PG-P-5XX



FACE VIEW
W16982-7PG-P-5XX
7 POSITION
A-KEY



WIRING VIEW
W16982-7PG-P-5XX

PRELIMINARY

DIMENSIONS IS BRACKETS [] ARE METRIC

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

RoHS COMPLIANT

REV.	INIT.	DATE	DESCRIPTION
0A	JGK	9/09/19	DRAWING CREATED FOR PDR #18004.

ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.

ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.

UNLESS OTHERWISE SPECIFIED TOLERANCES:
3 PLACE DECIMALS ±.005
ANGLES ±1°
FRACTIONS ±1/16

▷ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX

ORIG. DRAWN BY: JGK DATE: 9/09/19
CHECKED BY:
APPROVED BY:

SCALE: NTS | SIZE: B | SHEET: 1 OF 1

FILE: W16982-XPG-P-5XX | DIRECTORY: SLW

conxall
601 E. WILDWOOD VILLA PARK, IL 60181

TITLE: CABLE-END ASSEMBLY
5-7 #26 PIN CONTACTS, SOLDER
INSTA-CLICK, MICRO-CON-X
CUSTOMER: STANDARD PRODUCT

PART NUMBER: W16982-XPG-P-5XX | REV 0A