
TRIAD MAGNETICS

Wall Plug – Ins

FOR COMMERCIAL AND INDUSTRIAL USE ONLY


WAU16-500

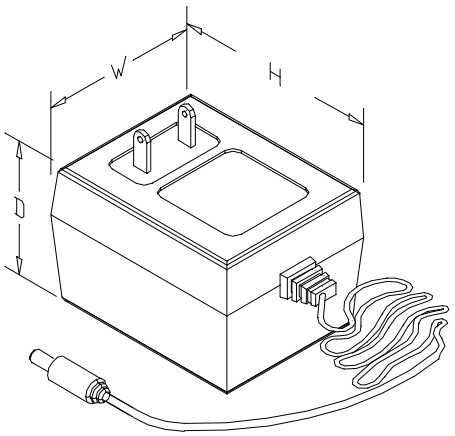

Electrical Specifications (@25C)
1. Primary Rating: 120V 60Hz (11.2W @ Full Load)
2. Primary Excitation Current: 85mA Max
3. Secondary Rating: 16VAC ± 5%, 500mA AC
4. Secondary No-Load Rating: 17.25VAC Ref.
5. Operating Temperature Range: -10 Deg C to +40 Deg C
6. Temperature Rise: 75 Deg C Max at rated load
   50 Deg C Max on enclosure surface

Mechanical Parameters:
Case Type: Thermoplastic molded enclosure.
Output Cord: 24 AWG, 6 Ft. Long Min.

Agency File:
UL/CUL: File E245587, UL 1310

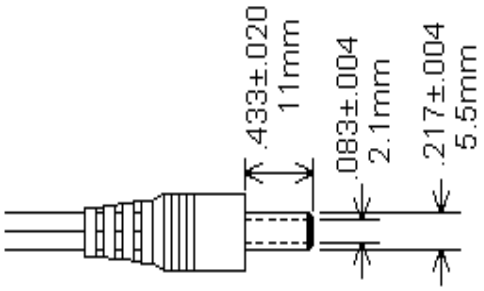



A. Dimensions:

H	W	D
80	60	48

*Units: In Millimeter

B. Schematic:

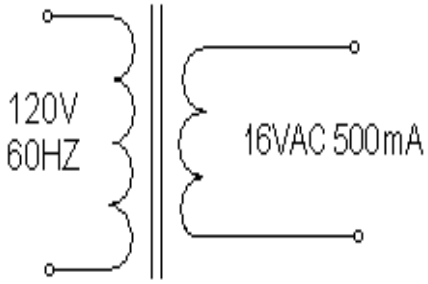

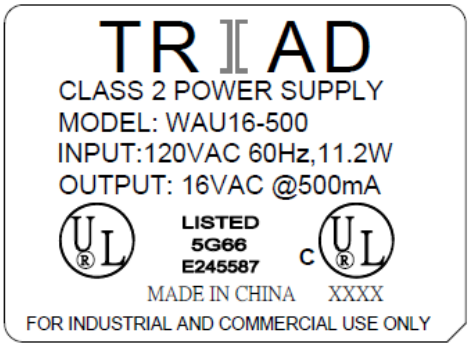

DOE Compliance: Effective December 30, 2017, the DOE will now not consider an external power supply with specific characteristics to meet the definition of a device that is subject to EPCA regulation, as long as the power supply is not distributed for use with consumer products.

RoHS Compliance: As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

* Upon printing, this document is considered “uncontrolled”. Please contact Triad Magnetics’ website for the most current version.

Web: www.TriadMagnetics.com
Phone 951-277-0757
Fax 951-277-2757

460 Harley Knox Blvd.
Perris, California 92571

Publish Date: June 3, 2019