WLC550 Industrial



Features

- 5 x 3 x 1.5 Inches Form factor
- Up to 550 Watts with Forced Air Cooled
- Efficiencies up to 92%
- -40 to 70 degree operating temperature*
- Remote ON/OFF New
- Now IEC/EN/UL62368-1 Compliant New
- Shall be approved to EN60950-1 2nd Edition
- 12V / 0.5A Fan Output
- Thermal Shut-Down feature
- MTBF : > 3M hours as per Telcordia SR-332, issue 3
- Approved with metal enclosures/accessories

Electrical Specifications

Input Voltage	90-264 VAC/390 VDC, Universal (Derate from 100% at 115VAC to 78% at 90VAC)
Input Frequency	47–63 Hz
Input Current	115 VAC: 6.0 A max. 230 VAC: 3.0 A max.
No Load Power	< 0.5W @ 115VAC < 0.7W @ 230VAC
Inrush Current	115 VAC – 25 A, 230 VAC – 45 A, 264 VAC – 75 A
Leakage Current	<200uA @115VAC and <400uA @230VAC
Efficiency	92%(48V), 91%(24V), 90%(12V,15V) typical@ 230VAC full load
Hold-up Time	Full Load > 16 ms typical Convection Load > 55 ms typical Conduction Load > 30ms typical
Power Factor	exceeds 0.95 with Full Load
Output Power	up to 550W (Forced Air Cooled) up to 250W (Conduction Cooled) up to 150W (Convection Cooled)
Output Voltage Adjustability	+/-3%
Line Regulation	+/-0.5%
Load Regulation	+/-1%
Transient Response	50-100% step load change, at 0.1A/uS slew rate, 50% duty cycle, 50Hz=5% , recovery time < 5 ms
Rise Time	55 ms typical
Set Point Tolerance	+/–1%
Over Current Protection	>110% ,Hiccup mode / Auto Recovery
Over Voltage Protection	110 to 140% , Hiccup mode / Auto Recovery
Short Circuit Protection	Hiccup mode / Auto Recovery
Switching Frequency	PFC – 70 to 130 KHz ,Resonant – 68 to 80 KHz
Operating Temperature	–40 to +70°C, * –40 to 0°C startup is guaranteed with spec deviation (ref note 6)
Storage Temperature	–40 to +85°C
Relative Humidity	5% to 95%, noncondensing
Altitude	Operating: 16,000 ft.; Nonoperating: 40,000 ft.
Isolation Voltage	Input to Output – 4000 VDC for ITE application Input to Earth : 2500 VDC

Please read our datasheet &drawing disclaimer here.

Model Number	Voltage	Max. Load (Convection)	Max. Load[7] (Conduction)	Max. Load (400 LFM)	Min. Load	Ripple[1]
WLC550-1012	12V	9.17A	16.67A	41.67A	0.0A	2%
WLC550-1015	15V	7.33A	13.33A	33.33A	0.0A	2%
WLC550-1024	24V	6.25A	10.42A	22.92A	0.0A	1%
WLC550-1030	30V	5.00A	8.33A	18.33A	0.0A	1%
WLC550-1048	48V	3.13A	5.21A	11.46A	0.0A	1%
WLC550-1058	58V	2.59A	4.31A	9.48A	0.0A	1%

Add Suffix 'O' for Remote On/Off option (example: LFWLC550-1030-O)


For Power supply unit with L bracket (metal accessory option) add "-L" suffix at the end of model number

For Power supply unit with U channel (metal accessory option) add "-U" suffix at the end of model number

For Power supply unit with CK Cover kit (metal accessory option) add "-CK" suffix at the end of model number

For Power supply unit with CK Cover kit with FAN (metal accessory option) add "-CKF" suffix at the end of model number

REMOTE ON/OFF INHIBIT

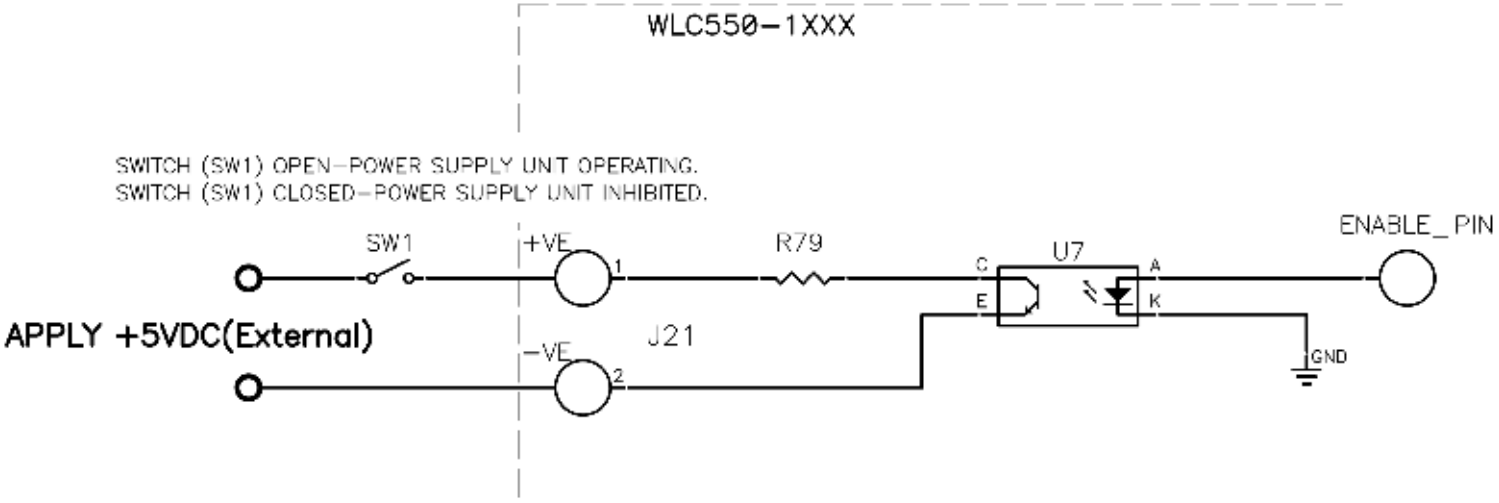

Pin Connections		
J1	Pin 1	AC LINE
	Pin 2	NOT FITTED
	Pin 3	AC NEUTRAL
J2	Pin 1	V1 +VE
	Pin 2	V1 -VE
J3	Pin 1	FAN +VE
	Pin 2	FAN -VE
J21 (Remote On/Off)	Pin 1	+VE(External)
	Pin 2	-VE (External)

Notes

1. Ripple is peak to peak with 20 MHz bandwidth and 10 µF (Electrolytic capacitor) in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.
2. Combined output power of main output, fan supply shall not exceed max. Power rating.
3. Fan supply output voltage tolerance including set point accuracy, line and load regulation is +/-10% and Ripple and noise is less than 10%.
4. Specifications are for nominal input voltage, 25°C unless otherwise stated.
5. Thermal shutdown feature : The power supply goes in hiccup mode when the temperature of Substrate PCB exceeds 110 °C (+/-10 °C).
6. Output ripple can be more than 10% of the output voltage.
7. Refer Recommended Conduction Plate & Clearance on Page No. 6.

Mechanical Specifications

AC Input Connector (J1)	JST : B3P-VH-B(LF)(SN) or equivalent Mating: VHR-3M or equivalent Pins : SVH-41T-P1.1 or equivalent
Earth (J4)	Molex: 19705-4301 Mating: 19003-0001
DC Output Connector (J2) (Screw Terminal)	6-32 inches Screw Pan HD Mating: Designed to accept Ring Tongue Terminal AMP : 8-31886-1, wherein one 16 AWG(max) wire can be crimped. Note : One Ring Tongue Terminal with 16 AWG is recommended for current up to 11A only. Use multiple tongue terminals with wire for more current
Aux (Fan) Output (J3) Remote On/Off (J21)	AMP :640456-2 Mating: 640440-2
Dimensions	5 x 3 x 1.5 inches (127 x 76.2x 38.1 mm)
Weight	500 gm approx


EMC

Parameter	Conditions/Description	Criteria
Conducted Emissions	EN55032-B, CISPR22-B, FCC PART15-B	Pass
Radiated Emissions	EN 55032 A	Pass Level B with external core (King core K5B RC 25x12x15-M in input cable)
Input Current Harmonics	EN 61000-3-2	Class D
Voltage Fluctuation and Flicker	EN 61000-3-3	Pass
ESD Immunity	EN 61000-4-2	Level 3, Criterion A
Radiated Field Immunity	EN 61000-4-3	Level 3, Criterion A
Electrical Fast Transient Immunity	EN 61000-4-4	Level 3, Criterion A
Surge Immunity	EN 61000-4-5	Level 3, Criterion A
Conducted Immunity	EN 61000-4-6	Level 3, Criterion A
Magnetic Field Immunity	EN 61000-4-8	Level 3, Criterion A
Voltage dips, interruptions	EN 61000-4-11	Criterion A & B


Safety

CE Mark	Complies with LVD Directive
Approval Agency	Nemko, UL, C-UL
Safety Standard(s)	IEC 62368-1:2018, IEC 60950-1(ed.2);am1;am2 EN 62368-1:2014;A11, EN 60950-1:2006;A11;A1;A12;A2 UL 62368-1 & CAN/CSA C22.2 No. 62368-1:19, UL 60950-1 and CAN/CSA C22.2 No. 60950-1-07
Safety File Number(s)	CB Test Certificate No : NO112396 Nemko Certificate No : P20224603 UL Certificate No : E515384-A6003-UL

Derating Curve

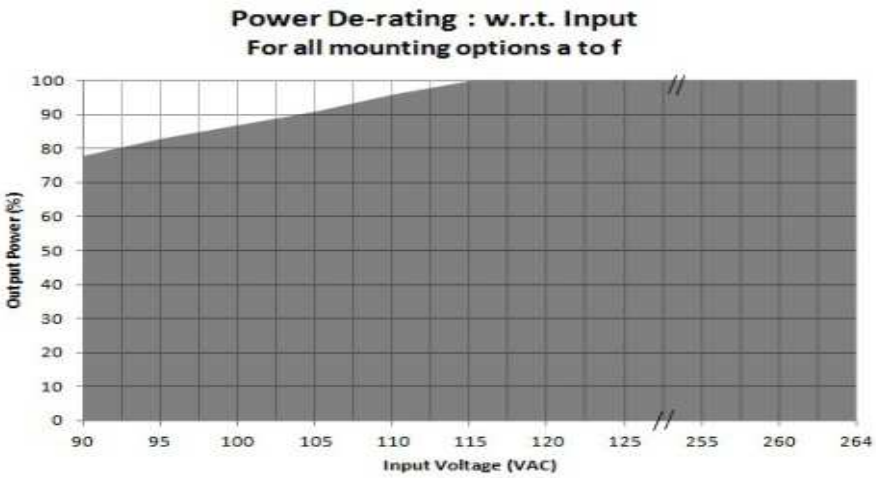


De-rate linearly from 100% at 115VAC to 78% at 90VAC

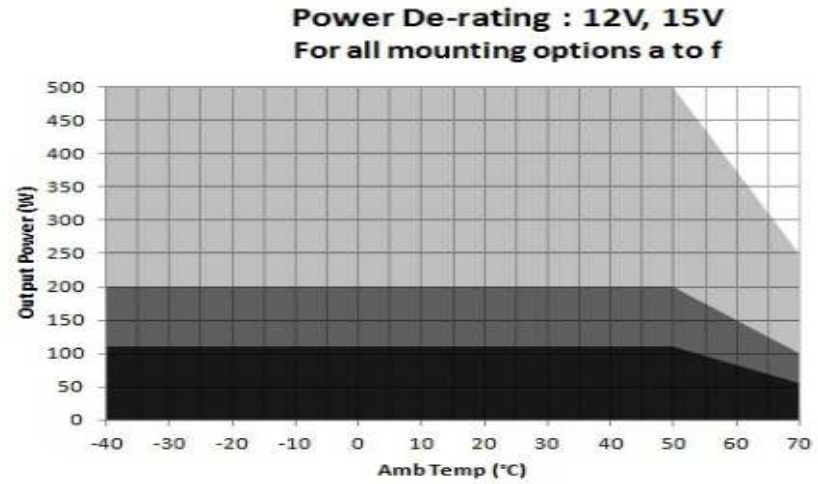

Convection load: 110W UP TO 50 °C
De-rate above 50 °C @ 2.5% per °C

Conduction load: 200W up to 50 °C
De-rate above 50 °C @ 2.5% per °C

Forced air cooled load : 500W up to 50°C
De-rate above 50 °C @ 2.5% per °C

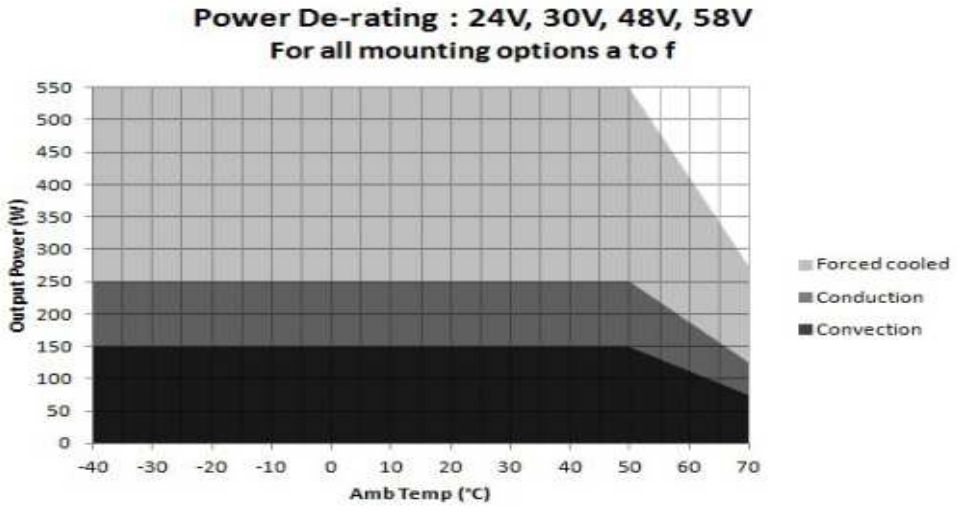

Convection load: 150W UP TO 50 °C
De-rate above 50 °C @ 2.5% per °C


Conduction load: 250W up to 50 °C
De-rate above 50 °C @ 2.5% per °C

Forced air cooled load : 550W up to 50°C
De-rate above 50 °C @ 2.5% per °C


Innovations in Power

Maximum Operating Temperature

For reliable and safe operation, please make sure the maximum component temperatures given in table below is not exceeded.

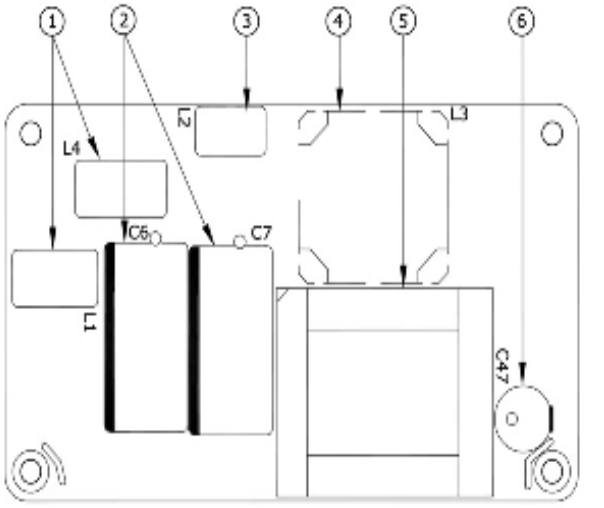

TOP PCB

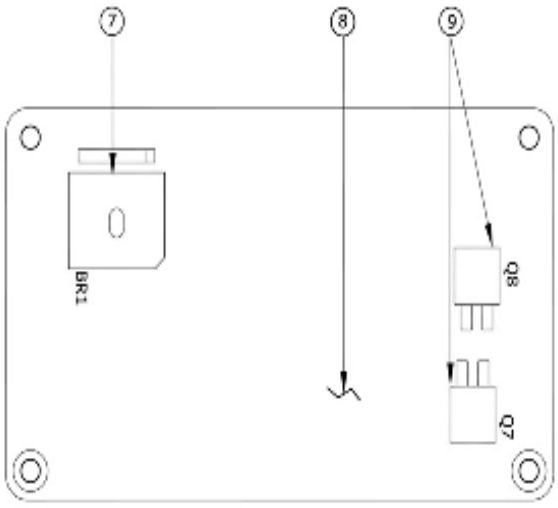


BOTTOM PCB


Ident no	Description	Max Temp Allowed (°C)
1	Common mode chokes	95
2	Input Bulk Capacitors	90
3	Differential choke	110
4	Boost Choke	110
5	Output Transformer	125 (for 12V & 15V) 110 (for 24V,30V,48V,58V)
6	Output Capacitor	90
7	Bridge Rectifier	120
8	Aluminium Clad PCB	105
9	Output Rectifiers	110


Recommended Conduction Plate & Clearance

Conduction power rating mentioned in the table is with additional aluminium base plate of 3 mm thickness with 177.8mm(7in) length & 101.6mm(4in) width.


Clearance of minimum 15mm above the component height is recommended for better thermal management.

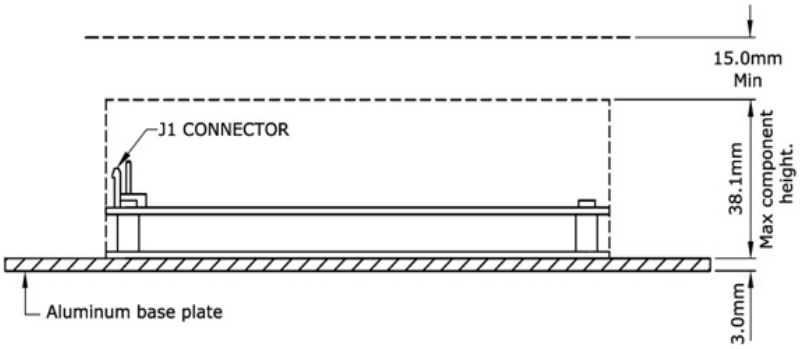

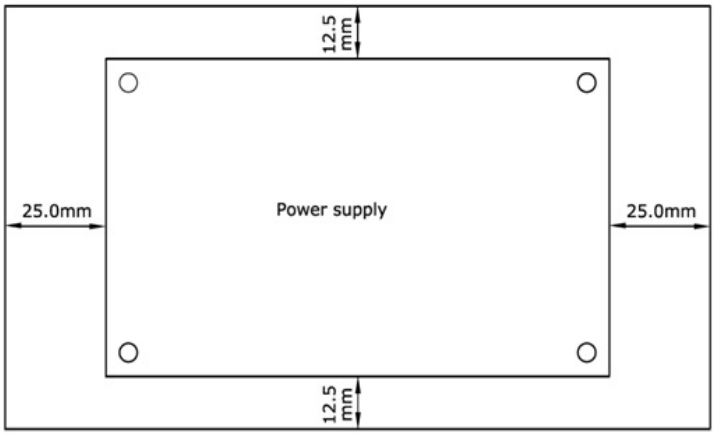


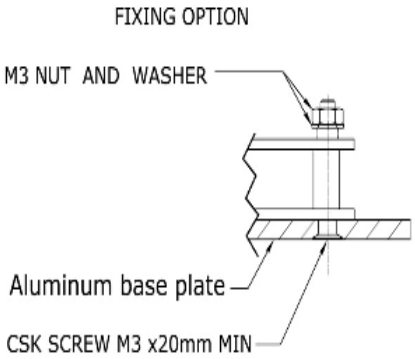


Mounting Option

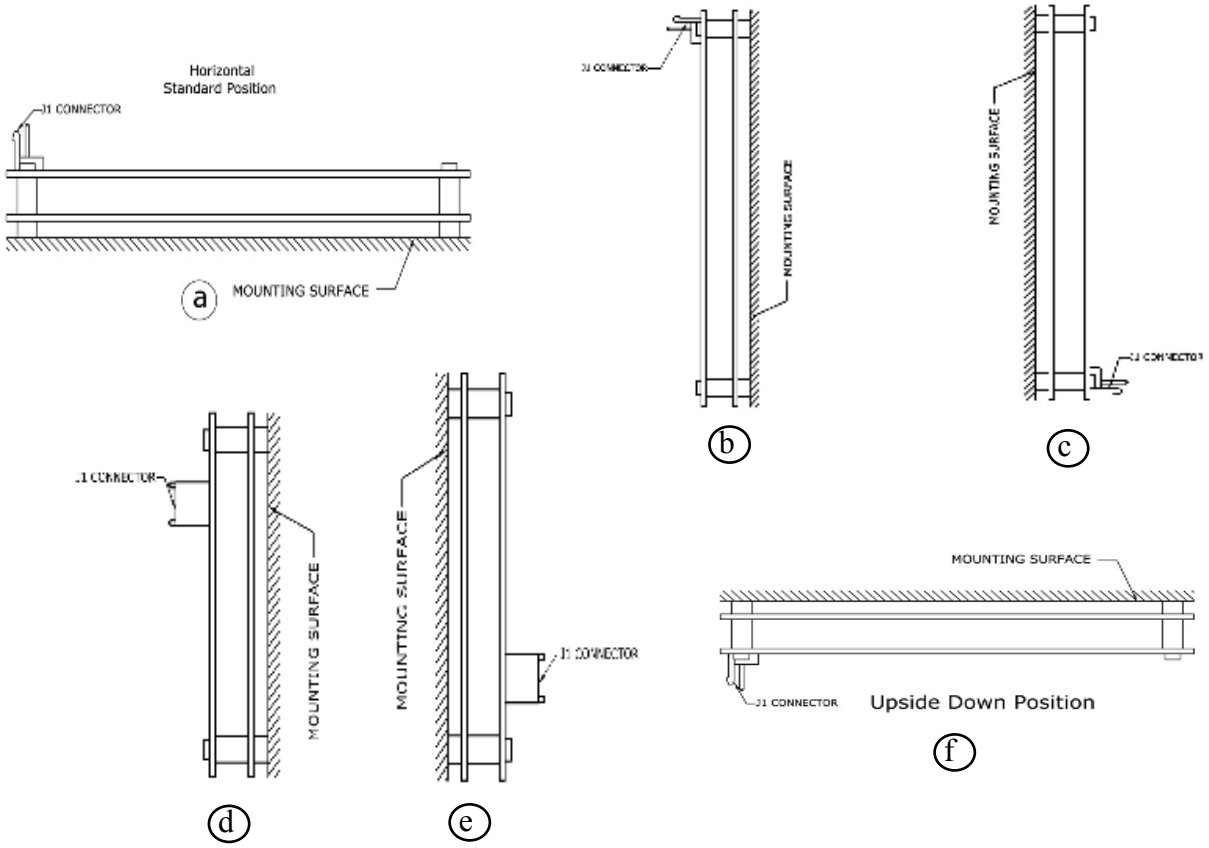


FIXING OPTION - 1

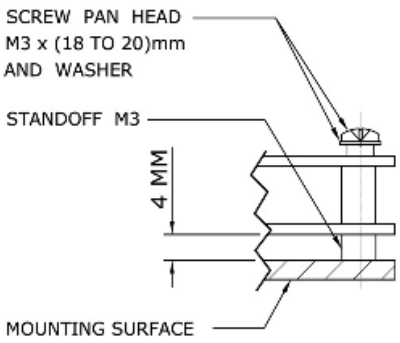

FIXING OPTION - 2

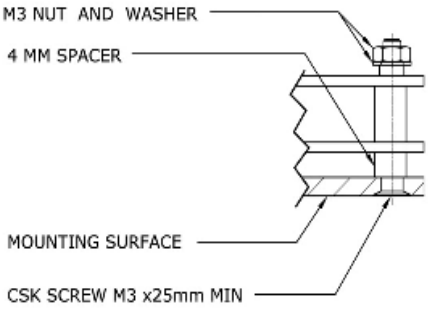


Mechanical Drawing

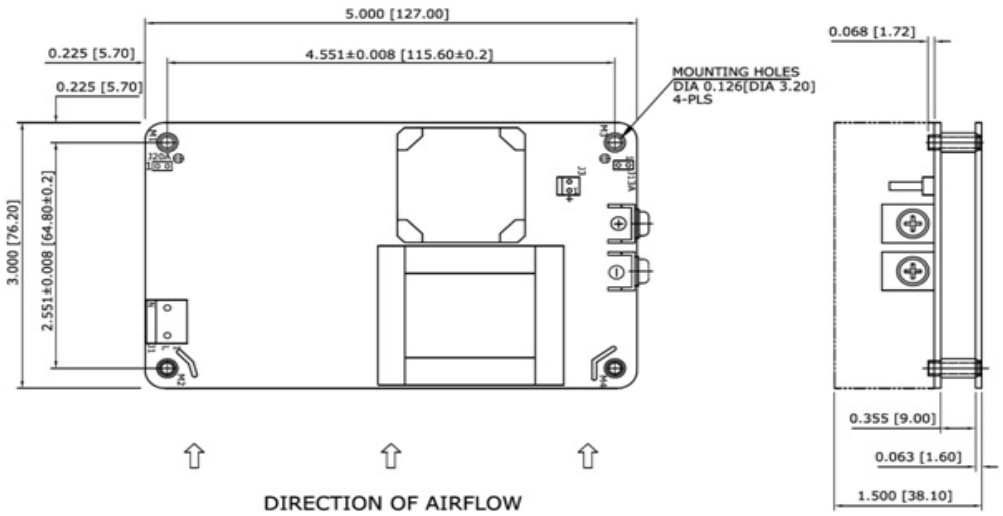

MECHANICAL OUTLINE DIMENSIONS
ALL DIMENSIONS ARE IN INCHES[MM]
GEN TOLERANCE : +/-0.04[+/-1.0MM]


Mechanical Drawing

WLC550 SERIES WITH REMOTE ON/OFF

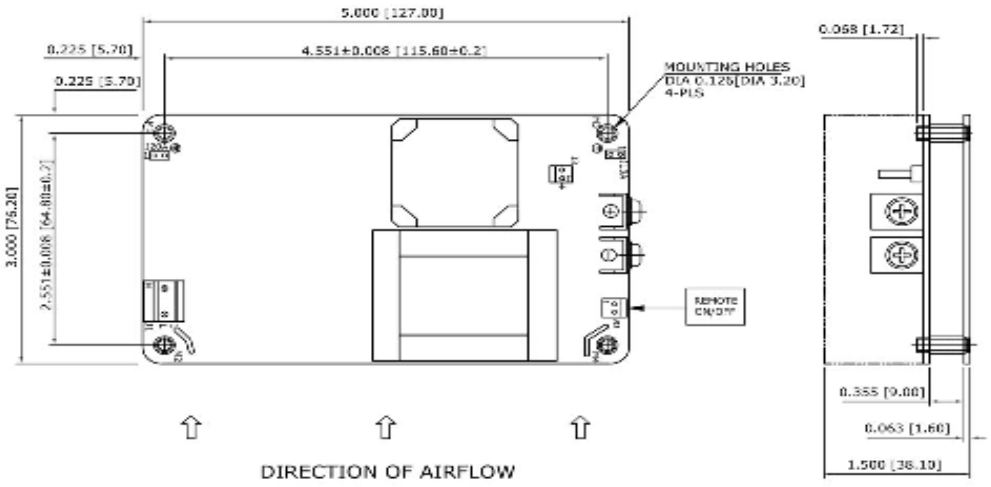


MECHANICAL OUTLINE DIMENSIONS
ALL DIMENSIONS ARE IN INCHES[MM]
GEN TOLERANCE : +/-0.04[+/-1.0MM]


Mechanical Drawing

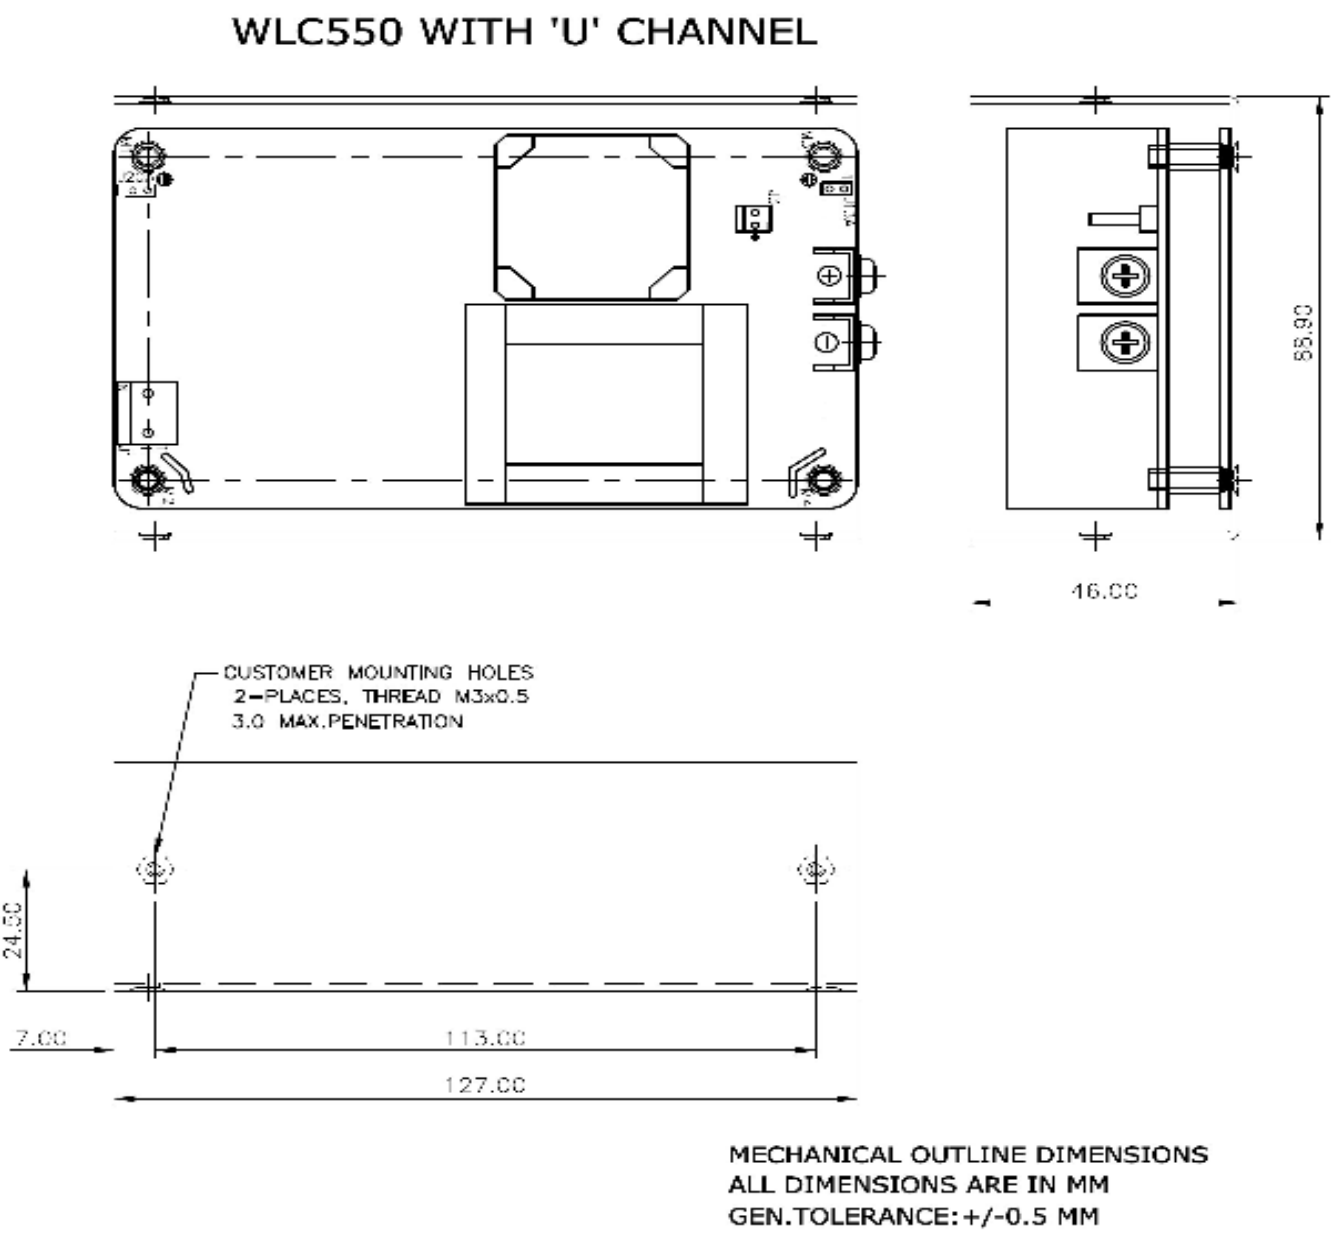

Mechanical Drawing


WLC550 WITH 'L' BRACKET

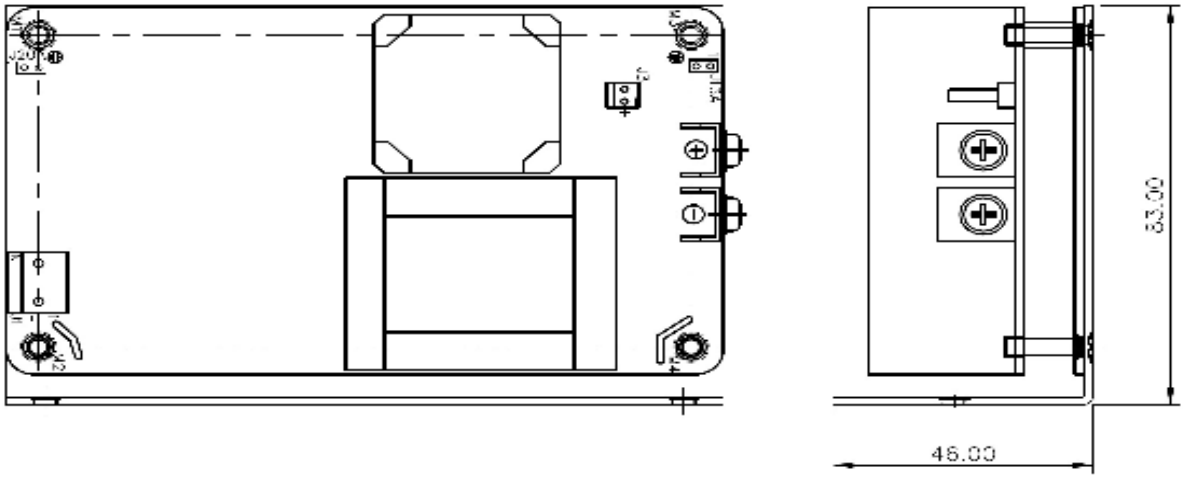

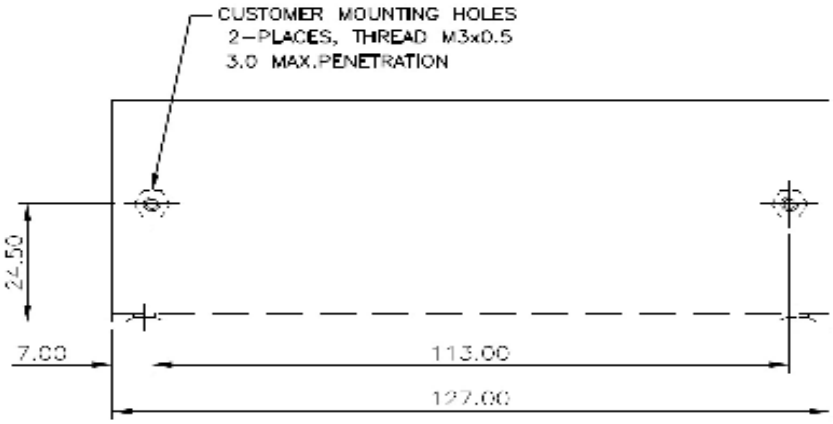


MECHANICAL OUTLINE DIMENSIONS
ALL DIMENSIONS ARE IN MM
GEN.TOLERANCE:+/-0.5 MM

Mechanical Drawing

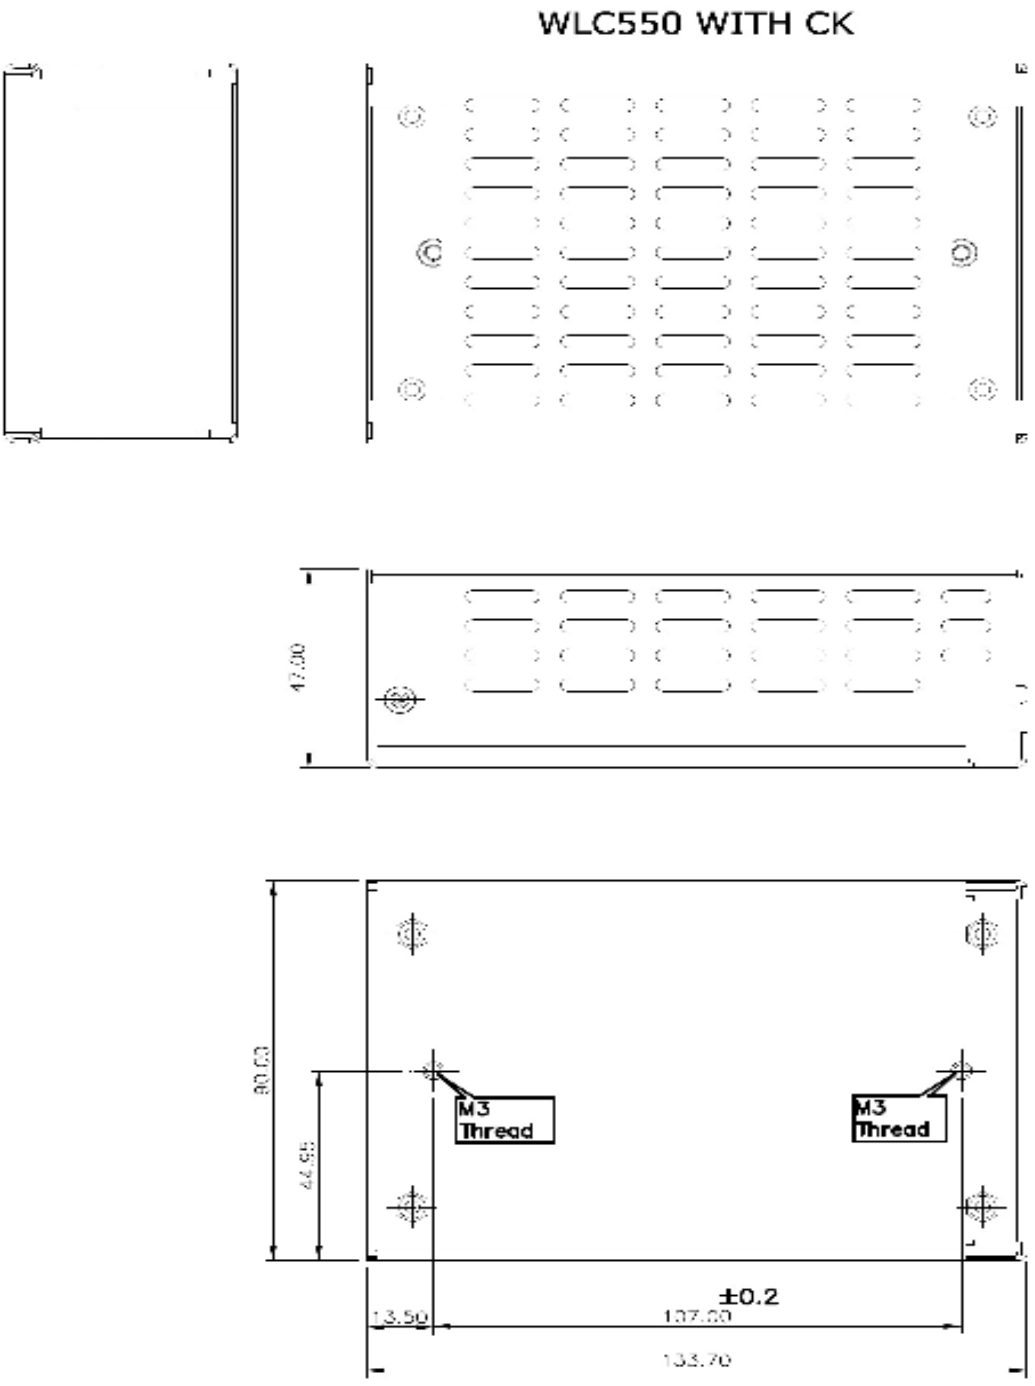

MECHANICAL OUTLINE DIMENSIONS
ALL DIMENSIONS ARE IN MM.
GEN. TOLERANCE: ±1.0 mm

Mechanical Drawing

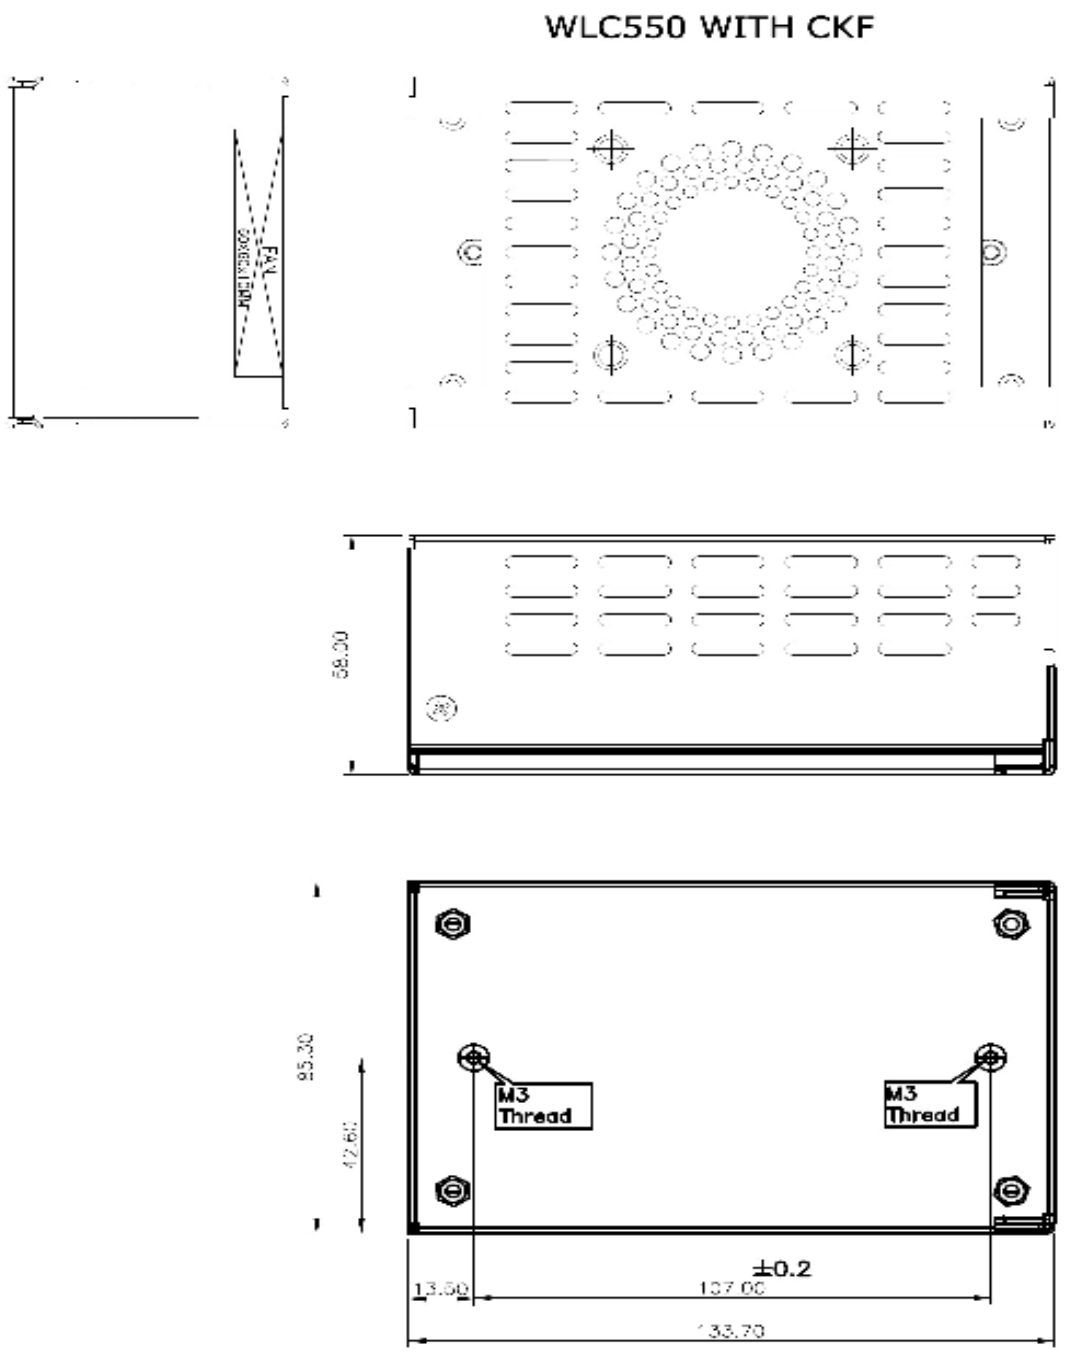

MECHANICAL OUTLINE DIMENSIONS
ALL DIMENSIONS ARE IN MM.
GEN. TOLERANCE: ±1.0 mm