

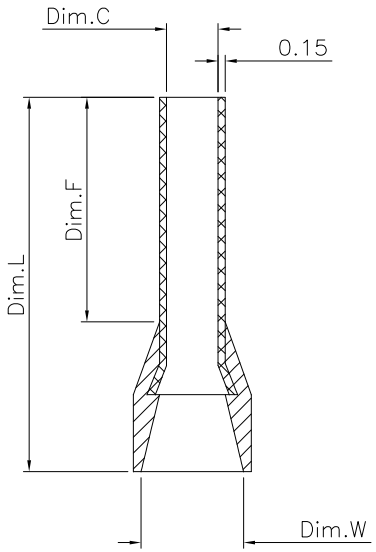

Specifications:
Material: Copper Tube, Tin Plated
Operating Temperature Range: −40°C~+105°C

Part No	Color	Dim.F ±0.40	Dim.L ±1.50	Dim.C +0.14 -0.00	Dim.W ±0.20	Wire Range AWG mm²
3060-06100G	YELLOW	6.0	12.0	1.40	3.00	17AWG 1.0mm²
3060-06100D	RED					
3060-08100G	YELLOW	8.0	14.0			
3060-08100D	RED					
3060-10100G	YELLOW	10.0	16.0			
3060-10100D	RED					
3060-12100G	YELLOW	12.0	18.0			
3060-12100D	RED					
Part No	Color	Dim.F ±0.40	Dim.L ±1.50	Dim.C +0.25 -0.00	Dim.W ±0.20	Wire Range AWG mm²
3060-08150G	RED	8.0	14.0	1.70	3.50	16AWG 1.5mm²
3060-08150D	BLACK					
3060-10150G	RED	10.0	16.0			
3060-10150D	BLACK					
3060-12150G	RED	12.0	18.0			
3060-12150D	BLACK					
Part No	Color	Dim.F ±0.40	Dim.L ±1.50	Dim.C +0.25 -0.00	Dim.W ±0.20	Wire Range AWG mm²
3060-08250F	GRAY	8.0	14.0	2.20	4.20	14AWG 2.5mm²
3060-08250D	BLUE					
3060-12250D	BLUE	12.0	18.0			
3060-18250D	BLUE	18.0	24.0 ±2.0			

RoHS Compliant

REV	DATE	FILE	BY
A	09−JAN−2023		

DRAWN: SELIN
CHECKED: JERRY
APPROVAL: RORY

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.15

UNIT: MM
SCALE:1:1
SHEET: 1 / 1
PROJECTION:

CnC Tech
Industrial Cable and Connector Technology

DESCRIPTION: Wire Ferrules 1.0~2.5 mm²
PART NO: 3060-XXXXXX
SIZE: A4