XC6216/XE6216 Series

ETR0321-026

28V Low Power Consumption 150mA Voltage Regulators (with Stand-by Function)

■GENERAL DESCRIPTION

XC6216/XE6216 series are positive voltage regulator ICs with 28V of operation voltage. The series consists of a voltage reference, an error amplifier, a current limiter, a thermal shutdown circuit and a phase compensation circuit plus a driver transistor.

The output voltage is selectable in 0.1V increments within the range of 1.8V to 12V using laser trimming technologies. With external resistors, the output voltage range can be expanded from 2.0V to 23V. The output stabilization capacitor (CL) is also compatible with low ESR ceramic capacitors.

The over current protection circuit and the thermal shutdown circuit are built-in. These two protection circuits will operate when the output current reaches current limit level or the junction temperature reaches temperature limit level.

The CE function enables the output to be turned off and the IC becomes a stand-by mode resulting in greatly reduced power consumption.


■APPLICATIONS

- ●Car audio, Car navigation systems
- ●Note PCs / Tablet PCs
- ●Mobile devices / terminals
- ●Digital still cameras / Camcorders
- ●Smart phones / Mobile phones
- ●Multi-function power supplies


■FEATURES

Max Output Current	: More than 150mA (200mA limit) (V_{IN}=V_{OUT}+3.0V)
Dropout Voltage	: 300mV@I_{OUT}=20mA
Input Voltage Range	: 2.0V~28.0V
Output Voltage Range	: 1.8V~12.0V (0.1V increments) 2.0V~23V with external resistors
Fixed Output Accuracy	:±2% ±1% (V_{out}≧2.00V) ±20mV (V_{out}≦1.9V)
Low Power Consumption	: 5μA
Stand-by Current	: Less than 0.1μA
High Ripple Rejection	: 30dB@1kHz
Operating Temperature	: -40℃~+85℃
Low ESR Capacitor	: Ceramic Capacitor Compatible
Built–in Protection	: Current Limit Circuit Thermal Shutdown Circuit
Operating Ambient Temperature	: -40℃ ~ +85℃
Packages	: SOT-25, SOT-89, SOT-89-5, USP-6C, SOT-223, TO-252 USP-6B06, SOT-23
Environmentally Friendly	: EU RoHS Compliant, Pb Free

■ TYPICAL APPLICATION CIRCUIT

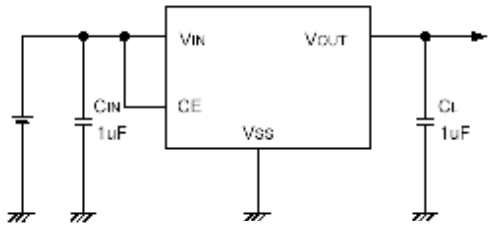


Fixed Output Voltage
XC6216B/XE6216B Series

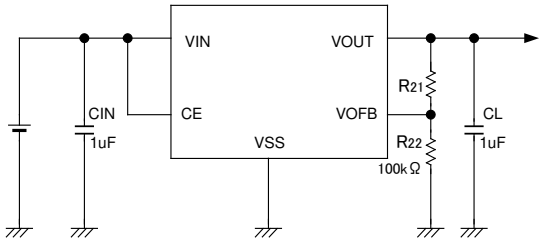

Output Voltage External Setting
XC6216C Series

■ TYPICAL PERFORMANCE CHARACTERISTICS


●Output Voltage vs. Input Volatage

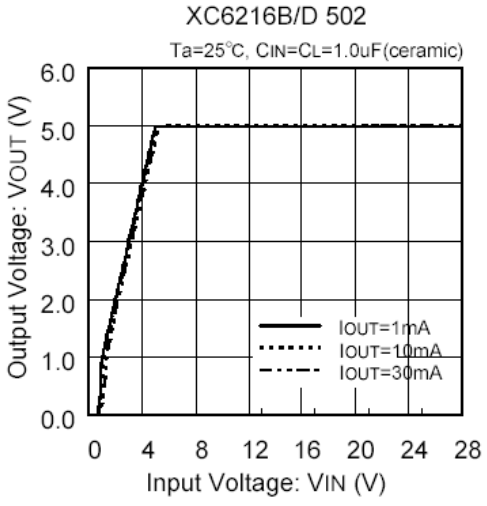


■ BLOCK DIAGRAMS

●XC6216 Series


●XC6216 Series B Type

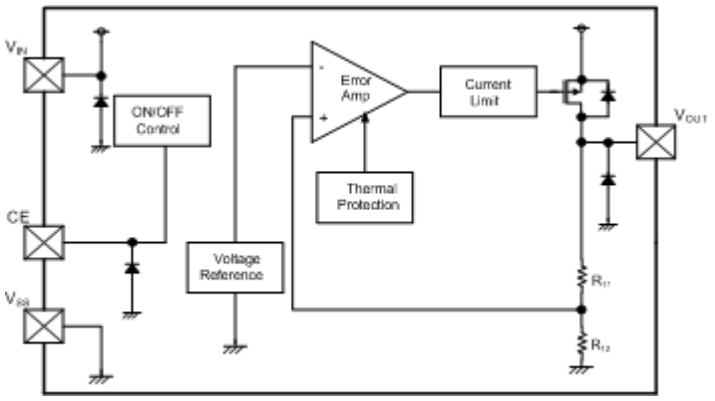

●XC6216 Series C Type

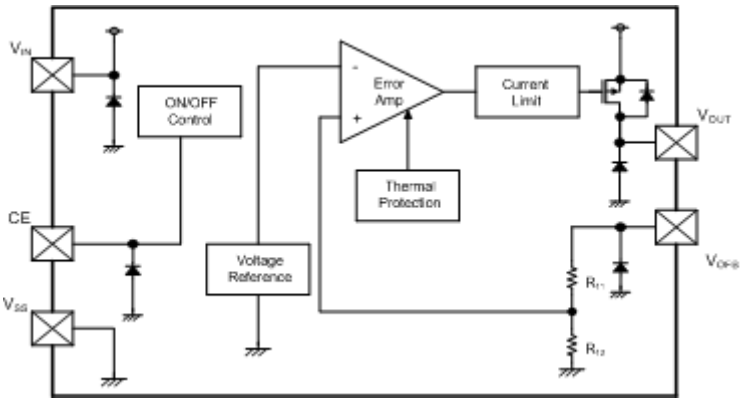


●XC6216 Series D Type

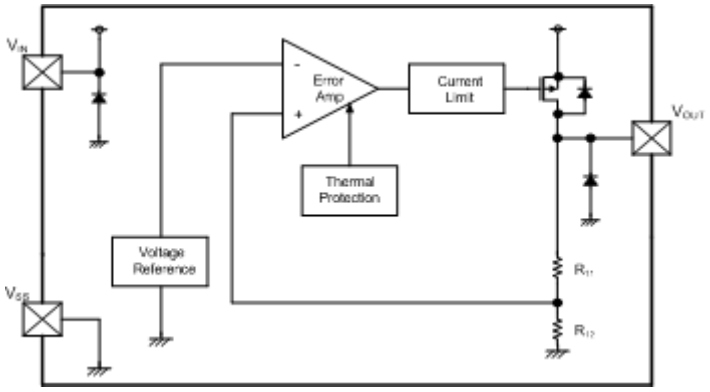

●XE6216 Series

●XE6216 Series B Type

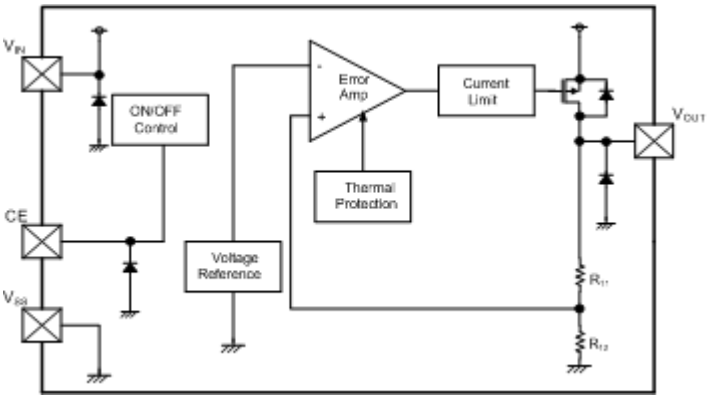

*Diodes inside the circuit are an ESD protection diode and parasitic diodes.

■PRODUCT CLASSIFICATION

●Ordering Information

XC6216①②③④⑤⑥-⑦(*1) : CE function (Active High) Fixed output voltage 1.8V ~ 12.0V(0.1V increments)

DESIGNATOR	ITEM	SYMBOL	DESCRIPTION
①	Type and Options of Regulators	B	Fixed output voltage
		C	Output voltage externally set (V_{OFB}=2.0V) (*3)
②③	Output Voltage	18 ~ C0	For the voltage within 1.8V ~ 9.9V (0.1V increments); e.g. 2.5V ⇒ 25, 5.0V ⇒ 50 For the voltage within 10.0V ~ 12.0V (0.1V increments); e.g. 10.6V ⇒ A6, 11.2V ⇒ B2, 12.0V ⇒ C0
		20	For C type (output voltage externally set), V_{OFB}=2.0V only
④	Output Voltage Accuracy (*2)	2	±2%
		1	V_{OUT}≧2.00V : ±1%,V_{OUT}≦1.9V : ±20mV (*3)
⑤⑥-⑦(*1)	Packages (Order Unit)	MR	SOT-25 (3,000pcs/Reel)
		MR-G	SOT-25 (3,000pcs/Reel)
		PR	SOT-89-5 (1,000pcs/Reel)
		PR-G	SOT-89-5 (1,000pcs/Reel)
		ER	USP-6C (3,000pcs/Reel)
		ER-G	USP-6C (3,000pcs/Reel)
		8R-G	USP-6B06 (5,000pcs/Reel)

(*1) The "-G" suffix denotes Halogen and Antimony free as well as being fully EU RoHS compliant.
(*2) For the Type C, the accuracy is based on V_{OFB} voltage. The actual output voltage accuracy is depended on the external resistances.
(*3) For the Type C and Output Voltage Accuracy±1% (±20mV) do not haveUSP-6B06 package

XC6216D①②③④⑤-⑥(*1) : 3 pin regulator (No CE function), Fixed output voltage 1.8V ~ 12.0V(0.1V increments)

DESIGNATOR	ITEM	SYMBOL	DESCRIPTION
①②	Output Voltage	20 ~ C0	For the voltage within 1.8V ~ 9.9V (0.1V increments); e.g. 2.5V ⇒ 25, 5.0V ⇒ 50 For the voltage within 10.0V ~ 12.0V (0.1V increments); e.g. 10.6V ⇒ A6, 11.2V ⇒ B2, 12.0V ⇒ C0
③	Output Voltage Accuracy	2	±2%
		1	V_{OUT}≧2.00V : ±1%,V_{OUT}≦1.9V : ±20mV
④⑤-⑥(*1)	Packages (Order Unit)	PR	SOT-89 (1,000pcs/Reel)
		PR-G	SOT-89 (1,000pcs/Reel)
		FR	SOT-223 (1,000pcs/Reel)
		FR-G	SOT-223 (1,000pcs/Reel)
		JR	TO-252 (2,500pcs/Reel)
		JR-G	TO-252 (2,500pcs/Reel)
		MR-G	SOT-23 (3,000pcs/Reel)


(*1) The "-G" suffix denotes Halogen and Antimony free as well as being fully EU RoHS compliant.

XE6216B①②③④⑤-⑥(*1) : CE function (Active High), Fixed output voltage 2.0V ~ 12.0V(0.1V increments)
Characteristics are guaranteed over the temperature range of -40℃ to 85℃.


DESIGNATOR	ITEM	SYMBOL	DESCRIPTION
①②	Output Voltage	20 ~ C0	For the voltage within 2.0V ~ 9.9V (0.1V increments); e.g. 2.5V ⇒ 25, 5.0V ⇒ 50 For the voltage within 10.0V ~ 12.0V (0.1V increments); e.g. 10.6V ⇒ A6, 11.2V ⇒ B2, 12.0V ⇒ C0
③	Output Voltage Accuracy	2	±2%
④⑤-⑥(*1)	Package (Order Unit)	PR	SOT-89-5 (1,000pcs/Reel)
		PR-G	SOT-89-5 (1,000pcs/Reel)

(*1) The "-G" suffix denotes Halogen and Antimony free as well as being fully EU RoHS compliant.


■PIN CONFIGURATION




SOT-25
(TOP VIEW)



SOT-89
(TOP VIEW)




SOT-89-5
(TOP VIEW)




USP-6C
(BOTTOM VIEW)


* The dissipation pad for the USP-6C and USP-6B06 packages should be solder-plated in reference mount pattern and metal masking so as to enhance mounting strength and heat release. If the pad needs to be connected to other pins, it should be connected to the V_{SS} (No. 5) pin.




SOT-223
(TOP VIEW)

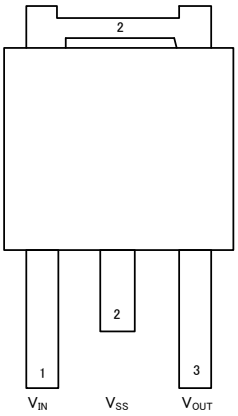

TO-252
(TOP VIEW)



USP-6B06
(BOTTOM VIEW)



SOT-23
(TOP VIEW)

■PIN ASSIGNMENT

●XC6216 Series B Type

PIN NUMBER				PIN NAME	FUNCTIONS
SOT-25	SOT-89-5	USP-6C	USP-6B06		
1	5	6	6	V_{IN}	Power Input
2	2	5	5	V_{SS}	Ground
3	4	2,4	2,4	NC	No connection
4	3	3	3	CE	ON/OFF Control
5	1	1	1	V_{OUT}	Output

●XC6216 Series C Type

PIN NUMBER			PIN NAME	FUNCTIONS
SOT-25	SOT-89-5	USP-6C		
1	5	6	V_{IN}	Power Input
2	2	5	V_{SS}	Ground
3	4	4	V_{OFB}	Output Voltage Adjustment
4	3	3	CE	ON/OFF Control
5	1	1	V_{OUT}	Output
-	-	2	NC	No connection

●XC6216 Series D Type

PIN NUMBER				PIN NAME	FUNCTIONS
SOT-89	SOT-223	TO-252	SOT-23		
3	3	1	2	V_{IN}	Power Input
2	2	2	3	V_{SS}	Ground
1	1	3	1	V_{OUT}	Output

■PIN ASSIGNMENT

●XE6216 Series B Type

PIN NUMBER	PIN NAME	FUNCTIONS
SOT-89-5		
1	V_{OUT}	Output
2	V_{SS}	Ground
3	CE	ON/OFF Control
4	NC	No connection
5	V_{IN}	Power Input

■LOGIC CONDITION FOR THE PIN

PIN NAME	DESIGNATOR	CONDITIONS	IC OPERATION
CE	L	$0V \leqq V_{CE} \leqq 0.35V$	OFF
	H	$1.1V \leqq V_{CE} \leqq 28.0V$	ON
	OPEN	CE=OPEN	Undefined state

* Please avoid the state of OPEN, and make CE Pin arbitrary fixed potential.
(XC6216 Series B Type, XE6216 Series B Type, XC6216 Series C Type)

■PIN FUNCTION ASSIGNMENT

SERIES	CHIP ENABLE PIN
XC6216 Series B Type/XE6216 Series B Type	Available
XC6216 Series C Type	Available
XC6216 Series D Type	Not Available

■ABSOLUTE MAXIMUM RATINGS

●XC6216 Series B Type

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage		V_{IN}	V_{SS}-0.3 ~ +30	V
Output Current		I_{OUT}	300 (*1)	mA
Output Voltage		V_{OUT}	V_{SS}-0.3 ~ V_{IN}+0.3	V
CE Input Voltage		V_{CE}	V_{SS}-0.3 ~ 30	V
Power Dissipation (Ta=25℃)	SOT-25	Pd	250	mW
			600 (40mm x 40mm Standard board) (*2)	
			760 (JESD51-7 board)*2)	
	SOT-89-5		500	
			1300 (40mm x 40mm Standard board) (*2)	
			1750 (JESD51-7 board)*2)	
	USP-6C		120	
			1000 (40mm x 40mm Standard board) (*2)	
			1250 (JESD51-7 board)*2)	
	USP-6B06		900 (40mm x 40mm Standard board) (*2)	
Operating Ambient Temperature		Topr	-40 ~ +85	℃
Storage Temperature		Tstg	-55 ~ +125	℃

(*1)$Pd > (V_{IN}-V_{OUT}) \times I_{OUT}$

(*2) The power dissipation figure shown is PCB mounted and is for reference only.
The mounting condition is please refer to PACKAGING INFORMATION.

■ABSOLUTE MAXIMUM RATINGS (Continued)

●XC6216 Series C Type

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage		V_{IN}	V_{SS}-0.3 ~ +30	V
Output Current		I_{OUT}	300 (*1)	mA
Output Voltage		V_{OUT}	V_{SS}-0.3 ~ V_{IN}+0.3	V
CE Input Voltage		V_{CE}	V_{SS}-0.3 ~ +30	V
FB Voltage		V_{OFB}	V_{SS}-0.3 ~ +30	V
Power Dissipation (Ta=25℃)	SOT-25	Pd	250	mW
			600 (40mm x 40mm Standard board) (*2)	
			760 (JESD51-7 board)(*2)	
	SOT-89-5		500	
			1300 (40mm x 40mm Standard board) (*2)	
			1750 (JESD51-7 board) (*2)	
	USP-6C		120	
			1000 (40mm x 40mm Standard board) (*2)	
			1250 (JESD51-7 board) (*2)	
Operating Ambient Temperature		Topr	-40 ~ +85	℃
Storage Temperature		Tstg	-55 ~ +125	℃

(*1) Pd > (V_{IN}-V_{OUT}) × I_{OUT}

(*2) The power dissipation figure shown is PCB mounted and is for reference only.
The mounting condition is please refer to PACKAGING INFORMATION.

●XC6216D Series

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage		V_{IN}	V_{SS}-0.3 ~ +30	V
Output Current		I_{OUT}	300 (*1)	mA
Output Voltage		V_{OUT}	V_{SS}-0.3 ~ V_{IN}+0.3	V
Power Dissipation (Ta=25℃)	SOT-89	Pd	500	mW
			1000 (40mm x 40mm Standard board) (*2)	
	SOT-223		300	
			1500 (40mm x 40mm Standard board) (*2)	
	TO-252		500	
			1800 (40mm x 40mm Standard board) (*2)	
	SOT-23		250	
			730 (JESD51-7 board) (*2)	
			500 (40mm x 40mm Standard board) (*2)	
Operating Ambient Temperature		Topr	-40 ~ +85	℃
Storage Temperature		Tstg	-55 ~ +125	℃

(*1) Pd > (V_{IN}-V_{OUT}) × I_{OUT}

(*2) The power dissipation figure shown is PCB mounted and is for reference only.
The mounting condition is please refer to PACKAGING INFORMATION.

●XE6216 Series B Type

PARAMETER		SYMBOL	RATINGS	UNITS
Input Voltage		V_{IN}	V_{SS}-0.3 ~ +30	V
Output Current		I_{OUT}	300 (*1)	mA
Output Voltage		V_{OUT}	V_{SS}-0.3 ~V_{IN}+0.3	V
CE Input Voltage		V_{CE}	V_{SS}-0.3 ~ +30	V
Power Dissipation (Ta=25℃)	SOT-89-5	Pd	500	mW
			1300 (40mm x 40mm Standard board) (*2)	
			1750 (JESD51-7 board) (*2)	
Operating Ambient Temperature		Topr	-40 ~ +85	℃
Junction Temperature		T_J	-40 ~ +125	℃
Storage Temperature		Tstg	-55 ~ +125	℃

(*1) Pd > (V_{IN}-V_{OUT}) × I_{OUT}

(*2) The power dissipation figure shown is PCB mounted and is for reference only.
The mounting condition is please refer to PACKAGING INFORMATION.

■ELECTRICAL CHARACTERISTICS

●XC6216 Series B Type

Ta=25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	$V_{OUT(E)}$(*2)	I_{OUT}=20mA, V_{CE}=V_{IN}		E-0		V	①
Maximum Output Current	I_{OUTMAX}	V_{IN}=$V_{OUT(T)}$+3.0V, V_{CE}=V_{IN}(*1) ($V_{OUT(T)}$≧3.0V)	150	-	-	mA	①
		V_{IN}=$V_{OUT(T)}$+3.0V, V_{CE}=V_{IN}(*1) ($V_{OUT(T)}$＜3.0V)	100	-	-	mA	①
Load Regulation	ΔV_{OUT}	1mA≦I_{OUT}≦50mA, V_{CE}=V_{IN} (1.8V≦$V_{OUT(T)}$≦7.0V)	-	50	90	mV	①
		1mA≦I_{OUT}≦50mA, V_{CE}=V_{IN} (7.0＜$V_{OUT(T)}$≦12.0V)	-	110	140	mV	①
Dropout Voltage 1	Vdif1(*3)	I_{OUT}=20mA, V_{CE}=V_{IN}	-	E-1		mV	①
Dropout Voltage 2	Vdif2(*3)	I_{OUT}=100mA ,V_{CE}=V_{IN}	-	E-2		mV	①
Supply Current	I_{SS}	V_{CE}=V_{IN}	1	5	9	μA	②
Stand-by Current	I_{STB}	V_{CE}=V_{SS}	-	0.01	0.10	μA	②
Line Regulation 1	ΔV_{OUT} / (ΔV_{IN}・V_{OUT})	$V_{OUT(T)}$+2.0V≦V_{IN}≦28.0V(*1) I_{OUT}=5mA, V_{CE}=V_{IN}	-	0.05	0.10	%/V	①
Line Regulation 2	ΔV_{OUT} / (ΔV_{IN}・V_{OUT})	$V_{OUT(T)}$+2.0V≦V_{IN}≦28.0V(*1) I_{OUT}=13mA, V_{CE}=V_{IN}	-	0.15	0.30	%/V	①
Input Voltage	V_{IN}		2.0	-	28.0	V	-
Output Voltage Temperature Characteristics	ΔV_{OUT} / (ΔTopr・V_{OUT})	I_{OUT}=20mA, V_{CE}=V_{IN} -40℃≦Topr≦85℃	-	±100	-	ppm/℃	①
Power Supply Rejection Ratio	PSRR	V_{IN}=[$V_{OUT(T)}$+2.0]V+0.5Vp-pAC(*1) I_{OUT}=20mA, f=1kHz, V_{CE}=V_{IN}	-	30	-	dB	③
Short Current	I_{SHORT}	V_{CE}=V_{IN} (*1)	-	30	-	mA	①
CE "H" Level Voltage	V_{CEH}	-	1.1	-	28.0	V	①
CE "L" Level Voltage	V_{CEL}	-	0	-	0.35	V	①
CE "H" Level Current	I_{CEH}	V_{IN}=V_{CE}=28.0V	-0.1	-	0.1	μA	①
CE "L" Level Current	I_{CEL}	V_{IN}=28.0V, V_{CE}=V_{SS}	-0.1	-	0.1	μA	①
Thermal Shutdown Detect Temperature	T_{TSD}	V_{CE}=V_{IN} Junction Temperature	-	150	-	℃	①
Thermal Shutdown Release Temperature	T_{TSR}	V_{CE}=V_{IN} Junction Temperature	-	125	-	℃	①
Hysteresis Width	T_{TSD}-T_{TSR}	V_{CE}=V_{IN} Junction Temperature	-	25	-	℃	-

Unless otherwise stated, V_{IN}=$V_{OUT(T)}$+2.0V.

NOTE:

*1: $V_{OUT(T)}$: Nominal output voltage

*2: $V_{OUT(E)}$: Effective output voltage

(i.e. the output voltage when "$V_{OUT(T)}$+2.0V" is provided at the V_{IN} pin while maintaining a certain I_{OUT} value.)

*3: Vdif={V_{IN1} - V_{OUT1}}

V_{OUT1}: $V_{OUT(T)}$＜3.0V, A voltage equal to 98% of the output voltage whenever an amply stabilized I_{OUT}{$V_{OUT(T)}$+3.0V} is input.

$V_{OUT(T)}$≧3.0V, A voltage equal to 98% of the output voltage whenever an amply stabilized I_{OUT}{$V_{OUT(T)}$+2.0V} is input.

V_{IN1}: The input voltage when V_{OUT1} appears as input voltage is gradually decreased.

■ELECTRICAL CHARACTERISTICS (Continued)

●XC6216 Series C Type

Ta=25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage (Accuracy±2%)	$V_{OUT(E)}$(*2)	V_{IN}=4.0V, I_{OUT}=20mA , V_{CE}=V_{IN} , V_{OFB}=V_{OUT}	1.96	2.00	2.04	V	①
Output Voltage (Accuracy±1%)	$V_{OUT(E)}$(*2)	V_{IN}=4.0V, I_{OUT}=20mA , V_{CE}=V_{IN} , V_{OFB}=V_{OUT}	1.98	2.00	2.02		
Divided Resistor	R_{FB}	V_{IN}=V_{OUT}=5.0V, V_{CE}=V_{SS} V_{OFB}=V_{OUT}	1.70	4.10	6.30	MΩ	④
Maximum Output Current	I_{OUTMAX}	V_{IN}=5.0V, V_{CE}=V_{IN} , V_{OFB}=V_{OUT}	100	-	-	mA	①
Load Regulation	$\triangle V_{OUT}$	V_{IN}=4.0V 1mA≦I_{OUT}≦50mA, V_{CE}=V_{IN}, V_{OFB}=V_{OUT}	-	50	90	mV	①
Dropout Voltage1	Vdif1(*3)	I_{OUT}=20mA, V_{CE}=V_{IN}, V_{OFB}=V_{OUT}	-	450	600	mV	①
Dropout Voltage2	Vdif2(*3)	I_{OUT}=100mA, V_{CE}=V_{IN}, V_{OFB}=V_{OUT}	-	1900	2600	mV	①
Supply Current	I_{SS}	V_{IN}=4.0V, V_{CE}=V_{IN}, V_{OFB}=V_{OUT}	1	5	9	μA	②
Stand-by Current	I_{STB}	V_{IN}=4.0V, V_{CE}=V_{SS} , V_{OFB}=V_{OUT}	-	0.01	0.10	μA	②
Line Regulation1	$\triangle V_{OUT}$ / ($\triangle V_{IN}$・V_{OUT})	4.0V≦V_{IN}≦28.0V, I_{OUT}=5mA, V_{CE}=V_{IN},V_{OFB}=V_{OUT}	-	0.05	0.10	%/V	①
Line Regulation2	$\triangle V_{OUT}$ / ($\triangle V_{IN}$・V_{OUT})	4.0V≦V_{IN}≦28.0V, I_{OUT}=13mA, V_{CE}=V_{IN}, V_{OFB}=V_{OUT}	-	0.15	0.30	%/V	①
Input Voltage	V_{IN}		2.0	-	28.0	V	-
Output Voltage Temperature Characteristics	$\triangle V_{OUT}$ / ($\triangle$Topr・V_{OUT})	V_{IN}=4.0V, I_{OUT}=20mA , V_{CE}=V_{IN}, V_{OFB}=V_{OUT}, -40℃≦Topr≦85℃	-	±100	-	ppm/℃	①
Power Supply Rejection Ratio	PSRR	V_{IN}=4.0V+0.5Vp-pAC, I_{OUT}=20mA, f=1kHz, V_{CE}=V_{IN} V_{OFB}=V_{OUT}	-	30	-	dB	③
Short Current	I_{SHORT}	V_{IN}=4.0V, V_{CE}=V_{IN}, V_{OFB}=V_{OUT}	-	30	-	mA	①
CE "H" Level Voltage	V_{CEH}	V_{IN}=4.0V, V_{OFB}=V_{OUT}	1.1	-	28.0	V	①
CE "L" Level Voltage	V_{CEL}	V_{IN}=4.0V, V_{OFB}=V_{OUT}	0	-	0.35	V	①
CE "H" Level Current	I_{CEH}	V_{IN}=V_{CE}=28.0V, V_{OFB}=V_{OUT}	-0.1	-	0.1	μA	①
CE "L" Level Current	I_{CEL}	V_{IN}=28.0V, V_{CE}=V_{SS} V_{OFB}=V_{OUT}	-0.1	-	0.1	μA	①
Thermal Shutdown Detect Temperature	T_{TSD}	V_{IN}=4.0V , V_{CE}=V_{IN} Junction Temperature	-	150	-	℃	①
Thermal Shutdown Release Temperature	T_{TSR}	V_{IN}=4.0V , V_{CE}=V_{IN} Junction Temperature	-	125	-	℃	①
Hysteresis Width	T_{TSD}-T_{TSR}	V_{IN}=4.0V , V_{CE}=V_{IN} Junction Temperature	-	25	-	℃	-

NOTE:

*1: $V_{OUT(T)}$: Nominal output voltage C type is 2.0V.

*2: $V_{OUT(E)}$: Effective output voltage

(i.e. the output voltage when "$V_{OUT(T)}$+2.0V" is provided at the V_{IN} pin while maintaining a certain I_{OUT} value.)

*3: Vdif={V_{IN1} - V_{OUT1}}

V_{OUT1}: $V_{OUT(T)}$＜3.0V, A voltage equal to 98% of the output voltage whenever an amply stabilized I_{OUT}{$V_{OUT(T)}$+3.0V} is input.

$V_{OUT(T)}$≧3.0V, A voltage equal to 98% of the output voltage whenever an amply stabilized I_{OUT}{$V_{OUT(T)}$+2.0V} is input.

V_{IN1}: The input voltage when V_{OUT}1 appears as input voltage is gradually decreased.

■ELECTRICAL CHARACTERISTICS (Continued)

●XC6216 Series D type

Ta=25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	$V_{OUT(E)}$(*2)	I_{OUT}=20mA		E-0		V	①
Maximum Output Current	I_{OUTMAX}	$V_{IN}=V_{OUT(T)}+3.0V$(*1) ($V_{OUT(T)}\geqq 3.0V$)	150	-	-	mA	①
		$V_{IN}=V_{OUT(T)}+3.0V$(*1) ($V_{OUT(T)}<3.0V$)	100	-	-	mA	①
Load Regulation	ΔV_{OUT}	1mA≦I_{OUT}≦50mA (1.8V≦$V_{OUT(T)}$≦7.0V)	-	50	90	mV	①
		1mA≦I_{OUT}≦50mA (7.0V＜$V_{OUT(T)}$≦12.0V)	-	110	140	mV	①
Dropout Voltage1	Vdif1(*3)	I_{OUT}=20mA	-	E-1		mV	①
Dropout Voltage2	Vdif2(*3)	I_{OUT}=100mA	-	E-2		mV	①
Supply Current	I_{SS}		1	5	9	μA	②
Line Regulation1	ΔV_{OUT} / (ΔV_{IN}・V_{OUT})	$V_{OUT(T)}+2.0V\leqq V_{IN}\leqq 28.0V$(*1) I_{OUT}=5mA	-	0.05	0.10	%/V	①
Line Regulation2	ΔV_{OUT} / (ΔV_{IN}・V_{OUT})	$V_{OUT(T)}+2.0V\leqq V_{IN}\leqq 28.0V$(*1) I_{OUT}=13mA	-	0.15	0.30	%/V	①
Input Voltage	V_{IN}		2.0	-	28.0	V	-
Output Voltage Temperature Characteristics	ΔV_{OUT} / (ΔTopr・V_{OUT})	I_{OUT}=20mA -40℃≦Topr≦85℃	-	±100	-	ppm/℃	①
Power Supply Rejection Ratio	PSRR	$V_{IN}=[V_{OUT(T)}+2.0]V+0.5Vp\text{-}pAC$(*1) I_{OUT}=20mA, f=1kHz	-	30	-	dB	③
Short Current	I_{SHORT}	$V_{IN}=V_{OUT(T)}+2.0V$(*1)	-	30	-	mA	①
Thermal Shutdown Detect Temperature	T_{TSD}	Junction Temperature	-	150	-	℃	①
Thermal Shutdown Release Temperature	T_{TSR}	Junction Temperature	-	125	-	℃	①
Hysteresis Width	T_{TSD}-T_{TSR}	Junction Temperature	-	25	-	℃	-

Unless otherwise stated, $V_{IN}=V_{OUT(T)}+2.0V$.

NOTE:

*1: $V_{OUT(T)}$: Nominal output voltage

*2: $V_{OUT(E)}$: Effective output voltage

(i.e. the output voltage when "$V_{OUT(T)}$+2.0V" is provided at the V_{IN} pin while maintaining a certain I_{OUT} value.)

*3: Vdif={V_{IN1} - V_{OUT1} }

V_{OUT1}: $V_{OUT(T)}<3.0V$, A voltage equal to 98% of the output voltage whenever an amply stabilized I_{OUT}\{$V_{OUT(T)}$+3.0V\} is input.

$V_{OUT(T)}\geqq 3.0V$, A voltage equal to 98% of the output voltage whenever an amply stabilized I_{OUT}\{$V_{OUT(T)}$+2.0V\} is input.

V_{IN1}: The input voltage when V_{OUT1} appears as input voltage is gradually decreased.

■ELECTRICAL CHARACTERISTICS (Continued)

●Voltage Chart (XC6216 Series)

PARAMETER	E-0				E-1		E-2	
NOMINAL OUTPUT VOLTAGE(V)	OUTPUT VOLTAGE (V) 2% ACCURACY		OUTPUT VOLTAGE (V) 1% ACCURACY		DROPOUT VOLTAGE 1 (mV) I_{OUT}=20mA		DROPOUT VOLTAGE 2 (mV) I_{OUT}=100mA	
$V_{OUT(T)}$	$V_{OUT(E)}$		$V_{OUT(E)}$		Vdif1		Vdif2	
	MIN.	MAX.	MIN.	MAX.	TYP.	MAX.	TYP.	MAX.
1.8	1.764	1.836	1.780	1.820	550	710	2200	2700
1.9	1.862	1.938	1.880	1.920	550	710	2200	2700
2.0	1.960	2.040	1.980	2.020	450	600	1900	2600
2.1	2.058	2.142	2.079	2.121	450	600	1900	2600
2.2	2.156	2.244	2.178	2.222	390	520	1700	2200
2.3	2.254	2.346	2.277	2.323	390	520	1700	2200
2.4	2.352	2.448	2.376	2.424	390	520	1700	2200
2.5	2.450	2.550	2.475	2.525	310	450	1500	1900
2.6	2.548	2.652	2.574	2.626	310	450	1500	1900
2.7	2.646	2.754	2.673	2.727	310	450	1500	1900
2.8	2.744	2.856	2.772	2.828	310	450	1500	1900
2.9	2.842	2.958	2.871	2.929	310	450	1500	1900
3.0	2.940	3.060	2.970	3.030	260	360	1300	1700
3.1	3.038	3.162	3.069	3.131	260	360	1300	1700
3.2	3.136	3.264	3.168	3.232	260	360	1300	1700
3.3	3.234	3.366	3.267	3.333	260	360	1300	1700
3.4	3.332	3.468	3.366	3.434	260	360	1300	1700
3.5	3.430	3.570	3.465	3.535	260	360	1300	1700
3.6	3.528	3.672	3.564	3.636	260	360	1300	1700
3.7	3.626	3.774	3.663	3.737	260	360	1300	1700
3.8	3.724	3.876	3.762	3.838	260	360	1300	1700
3.9	3.822	3.978	3.861	3.939	260	360	1300	1700
4.0	3.920	4.080	3.960	4.040	220	320	1100	1500
4.1	4.018	4.182	4.059	4.141	220	320	1100	1500
4.2	4.116	4.284	4.158	4.242	220	320	1100	1500
4.3	4.214	4.386	4.257	4.343	220	320	1100	1500
4.4	4.312	4.488	4.356	4.444	220	320	1100	1500
4.5	4.410	4.590	4.455	4.545	220	320	1100	1500
4.6	4.508	4.692	4.554	4.646	220	320	1100	1500
4.7	4.606	4.794	4.653	4.747	220	320	1100	1500
4.8	4.704	4.896	4.752	4.848	220	320	1100	1500
4.9	4.802	4.998	4.851	4.949	220	320	1100	1500

■ELECTRICAL CHARACTERISTICS (Continued)

●Voltage Chart (XC6216 Series) (Continued)

PARAMETER	E-0				E-1		E-2	
NOMINAL OUTPUT VOLTAGE(V)	OUTPUT VOLTAGE (V) 2% ACCURACY		OUTPUT VOLTAGE (V) 1% ACCURACY		DROPOUT VOLTAGE 1 (mV) I_{OUT}=20mA		DROPOUT VOLTAGE 2 (mV) I_{OUT}=100mA	
$V_{OUT(T)}$	$V_{OUT(E)}$		$V_{OUT(E)}$		Vdif1		Vdif2	
	MIN.	MAX.	MIN.	MAX.	TYP.	MAX.	TYP.	MAX.
5.0	4.900	5.100	4.950	5.050	190	280	1000	1300
5.1	4.998	5.202	5.049	5.151	190	280	1000	1300
5.2	5.096	5.304	5.148	5.252	190	280	1000	1300
5.3	5.194	5.406	5.247	5.353	190	280	1000	1300
5.4	5.292	5.508	5.346	5.454	190	280	1000	1300
5.5	5.390	5.610	5.445	5.555	190	280	1000	1300
5.6	5.488	5.712	5.544	5.656	190	280	1000	1300
5.7	5.586	5.814	5.643	5.757	190	280	1000	1300
5.8	5.684	5.916	5.742	5.916	190	280	1000	1300
5.9	5.782	6.018	5.841	5.959	190	280	1000	1300
6.0	5.880	6.120	5.940	6.060	190	280	1000	1300
6.1	5.978	6.222	6.039	6.161	190	280	1000	1300
6.2	6.076	6.324	6.138	6.262	190	280	1000	1300
6.3	6.174	6.426	6.237	6.363	190	280	1000	1300
6.4	6.272	6.528	6.336	6.464	190	280	1000	1300
6.5	6.370	6.630	6.435	6.565	170	230	800	1150
6.6	6.468	6.732	6.534	6.666	170	230	800	1150
6.7	6.566	6.834	6.633	6.767	170	230	800	1150
6.8	6.664	6.936	6.732	6.868	170	230	800	1150
6.9	6.762	7.038	6.831	6.969	170	230	800	1150
7.0	6.860	7.140	6.930	7.070	170	230	800	1150
7.1	6.958	7.242	7.029	7.171	170	230	800	1150
7.2	7.056	7.344	7.128	7.272	170	230	800	1150
7.3	7.154	7.446	7.227	7.373	170	230	800	1150
7.4	7.252	7.548	7.326	7.474	170	230	800	1150
7.5	7.350	7.650	7.425	7.575	170	230	800	1150
7.6	7.448	7.752	7.524	7.676	170	230	800	1150
7.7	7.546	7.854	7.623	7.777	170	230	800	1150
7.8	7.644	7.956	7.722	7.878	170	230	800	1150
7.9	7.742	8.058	7.821	7.979	170	230	800	1150
8.0	7.840	8.160	7.920	8.080	170	230	800	1150

■ELECTRICAL CHARACTERISTICS (Continued)

●Voltage Chart (XC6216 Series) (Continued)

PARAMETER	E-0				E-1		E-2	
NOMINAL OUTPUT VOLTAGE(V)	OUTPUT VOLTAGE (V) 2% ACCURACY		OUTPUT VOLTAGE (V) 1% ACCURACY		DROPOUT VOLTAGE 1 (mV) I_{OUT}=20mA		DROPOUT VOLTAGE 2 (mV) I_{OUT}=100mA	
$V_{OUT(T)}$	$V_{OUT(E)}$		$V_{OUT(E)}$		Vdif1		Vdif2	
	MIN.	MAX.	MIN.	MAX.	TYP.	MAX.	TYP.	MAX.
8.1	7.938	8.262	8.019	8.181	130	190	700	950
8.2	8.036	8.364	8.118	8.282	130	190	700	950
8.3	8.134	8.466	8.217	8.383	130	190	700	950
8.4	8.232	8.568	8.316	8.484	130	190	700	950
8.5	8.330	8.670	8.415	8.585	130	190	700	950
8.6	8.428	8.772	8.514	8.686	130	190	700	950
8.7	8.526	8.874	8.613	8.787	130	190	700	950
8.8	8.624	8.976	8.712	8.888	130	190	700	950
8.9	8.722	9.078	8.811	8.989	130	190	700	950
9.0	8.820	9.180	8.910	9.090	130	190	700	950
9.1	8.918	9.282	9.009	9.191	130	190	700	950
9.2	9.016	9.384	9.108	9.292	130	190	700	950
9.3	9.114	9.486	9.207	9.393	130	190	700	950
9.4	9.212	9.588	9.306	9.494	130	190	700	950
9.5	9.310	9.690	9.405	9.595	130	190	700	950
9.6	9.408	9.792	9.504	9.696	130	190	700	950
9.7	9.506	9.894	9.603	9.797	130	190	700	950
9.8	9.604	9.996	9.702	9.898	130	190	700	950
9.9	9.702	10.098	9.801	9.999	130	190	700	950
10.0	9.800	10.200	9.900	10.100	130	190	700	950
10.1	9.898	10.302	9.999	10.201	120	160	650	850
10.2	9.996	10.404	10.098	10.302	120	160	650	850
10.3	10.094	10.506	10.197	10.403	120	160	650	850
10.4	10.192	10.608	10.296	10.504	120	160	650	850
10.5	10.290	10.710	10.395	10.605	120	160	650	850
10.6	10.388	10.812	10.494	10.706	120	160	650	850
10.7	10.486	10.914	10.593	10.807	120	160	650	850
10.8	10.584	11.016	10.692	10.908	120	160	650	850
10.9	10.682	11.118	10.791	11.009	120	160	650	850
11.0	10.780	11.220	10.890	11.110	120	160	650	850
11.1	10.878	11.322	10.989	11.211	120	160	650	850
11.2	10.976	11.424	11.088	11.312	120	160	650	850
11.3	11.074	11.526	11.187	11.413	120	160	650	850
11.4	11.172	11.628	11.286	11.514	120	160	650	850
11.5	11.270	11.730	11.385	11.615	120	160	650	850
11.6	11.368	11.832	11.484	11.716	120	160	650	850
11.7	11.466	11.934	11.583	11.817	120	160	650	850
11.8	11.564	12.036	11.682	11.918	120	160	650	850
11.9	11.662	12.138	11.781	12.019	120	160	650	850
12.0	11.760	12.240	11.880	12.120	120	160	650	850

■ELECTRICAL CHARACTERISTICS (Continued)

●XE6216 Series B Type

PARAMETER	SYMBOL	CONDITIONS	Ta=25℃			Ta=-40℃ ~ 85℃			UNITS	CIRCUIT
			MIN.	TYP.	MAX.	MIN.	TYP.	MAX.		
Output Voltage	$V_{OUT(E)}$(*2)	I_{OUT}=20mA , V_{CE}=V_{IN}	E-0-1			E-0-2			V	①
Maximum Output Current(*)	I_{OUTMAX}	V_{IN}=$V_{OUT(T)}$+3.0V, V_{CE}=V_{IN}(*1) ($V_{OUT(T)}$≧3.0V)	-	-	-	150	-	-	mA	①
		V_{IN} = $V_{OUT(T)}$+3.0V, V_{CE}=V_{IN}(*1) ($V_{OUT(T)}$＜3.0V)	-	-	-	100	-	-	mA	①
Load Regulation(*)	ΔV_{OUT}	V_{CE}=V_{IN} , 1mA≦I_{OUT}≦50mA	-	E-1-1		-	E-1-2		mV	①
Dropout Voltage1	Vdif1(*3)	I_{OUT}=20mA, V_{CE}=V_{IN}	-	E-2-1		-	E-2-2		mV	①
Dropout Voltage2(*)	Vdif2(*3)	I_{OUT}=100mA, V_{CE}=V_{IN}	-	E-3-1		-	E-3-2		mV	①
Supply Current	I_{SS}	V_{CE}=V_{IN}	1	5	9	0.5	5	10	μA	②
Stand-by Current	I_{STB}	V_{CE}=V_{SS}	-	0.01	0.1	-	0.01	4	μA	②
Line Regulation1(*)	ΔV_{OUT}/ (ΔV_{IN}・V_{OUT})	$V_{OUT(T)}$+2.0V≦V_{IN}≦28.0V(*1) I_{OUT}=5mA, V_{CE}=V_{IN}	-	0.05	0.10	-	0.05	0.12	%/V	①
Line Regulation2(*)	ΔV_{OUT}/ (ΔV_{IN}・V_{OUT})	$V_{OUT(T)}$+2.0V≦V_{IN}≦28.0V(*1) I_{OUT}=13mA, V_{CE}=V_{IN}	-	0.15	0.30	-	0.15	0.32	%/V	①
Input Voltage	V_{IN}		2.0		28.0	2.0		28.0	V	
Output Voltage Temperature Characteristics	ΔV_{OUT}/ (ΔTopr・V_{OUT})	I_{OUT}=20mA, V_{CE}=V_{IN} -40℃≦Topr≦85℃	-	±100	±350	-	-	-	ppm/℃	①
Power Supply Rejection Ratio	PSRR	V_{IN}=[$V_{OUT(T)}$+2.0]V+0.5Vp-pAC(*1) I_{OUT}=20mA, f=1kHz , V_{CE}=V_{IN}	-	30	-	-	30	-	dB	③
Short Current	I_{SHORT}	V_{CE}=V_{IN}	-	30	-	-	30	-	mA	①
CE "H" Level Voltage	V_{CEH}	-	-	-	-	1.1	-	28.0	V	①
CE "L" Level Voltage	V_{CEL}	-	-	-	-	0	-	0.35	V	①
CE "H" Level Current	I_{CEH}	V_{IN}=V_{CE}=28.0V	-0.1	-	0.1	-0.1	-	0.7	μA	②
CE "L" Level Current	I_{CEL}	V_{IN}=28.0V, V_{CE}=V_{SS}	-0.1	-	0.1	-0.2	-	-0.2	μA	②
Thermal Shutdown Detect Temperature	T_{TSD}	V_{CE}=V_{IN}、 Junction Temperature	-	150	-	-	150	-	℃	①
Thermal Shutdown Release Temperature	T_{TSR}	V_{CE}=V_{IN}、 Junction Temperature	-	125	-	-	125	-	℃	①
Hysteresis Width	T_{TSD} - T_{TSR}	V_{CE}=V_{IN}、 Junction Temperature	-	25	-	-	25	-	℃	-

Unless otherwise stated, V_{IN}=$V_{OUT(T)}$+2.0V.

NOTE:

*1: $V_{OUT(T)}$: Nominal output voltage

*2: $V_{OUT(E)}$: Effective output voltage

(i.e. the output voltage when "$V_{OUT(T)}$+2.0V" is provided at the V_{IN} pin while maintaining a certain I_{OUT} value.)

*3: Vdif={V_{IN1}- V_{OUT1}}

V_{OUT1}: $V_{OUT(T)}$＜3.0V, A voltage equal to 98% of the output voltage whenever an amply stabilized I_{OUT}{$V_{OUT(T)}$+3.0V} is input.

$V_{OUT(T)}$≧3.0V, A voltage equal to 98% of the output voltage whenever an amply stabilized I_{OUT}{$V_{OUT(T)}$+2.0V} is input.

V_{IN1}: The input voltage when V_{OUT1} appears as input voltage is gradually decreased.

（*）Junction temperature range is Tj=-40～125℃ for this table.

■ELECTRICAL CHARACTERISTICS (Continued)

●Voltage Chart 1 (XE6216 Series)

MBOL	E-0-1		E-0-2	
Temperature / Ta	25℃		-40 ~ 85℃	
PARAMETER / NOMINAL OUTPUT VOLTAGE(V)	OUTPUT VOLTAGE (V) Accuracy ±2%		OUTPUT VOLTAGE (V) Accuracy +3% , -3.5%	
$V_{OUT(T)}$	$V_{OUT(E)}$		$V_{OUT(E)}$	
	MIN.	MAX.	MIN.	MAX.
2.0	1.960	2.040	1.930	2.060
2.1	2.058	2.142	2.027	2.163
2.2	2.156	2.244	2.123	2.266
2.3	2.254	2.346	2.220	2.369
2.4	2.352	2.448	2.316	2.472
2.5	2.450	2.550	2.413	2.575
2.6	2.548	2.652	2.509	2.678
2.7	2.646	2.754	2.606	2.781
2.8	2.744	2.856	2.702	2.884
2.9	2.842	2.958	2.799	2.987
3.0	2.940	3.060	2.895	3.090
3.1	3.038	3.162	2.992	3.193
3.2	3.136	3.264	3.088	3.296
3.3	3.234	3.366	3.185	3.399
3.4	3.332	3.468	3.281	3.502
3.5	3.430	3.570	3.378	3.605
3.6	3.528	3.672	3.474	3.708
3.7	3.626	3.774	3.571	3.811
3.8	3.724	3.876	3.667	3.914
3.9	3.822	3.978	3.764	4.017
4.0	3.920	4.080	3.860	4.120
4.1	4.018	4.182	3.957	4.223
4.2	4.116	4.284	4.053	4.326
4.3	4.214	4.386	4.150	4.429
4.4	4.312	4.488	4.246	4.532
4.5	4.410	4.590	4.342	4.635
4.6	4.508	4.692	4.439	4.738
4.7	4.606	4.794	4.535	4.841
4.8	4.704	4.896	4.632	4.944
4.9	4.802	4.998	4.728	5.047

SYMBOL	E-0-1		E-0-2	
Temperature / Ta	25℃		-40 ~ 85℃	
PARAMETER / NOMINAL OUTPUT VOLTAGE(V)	OUTPUT VOLTAGE (V) Accuracy ±2%		OUTPUT VOLTAGE (V) Accuracy +3% , -3.5%	
$V_{OUT(T)}$	$V_{OUT(E)}$		$V_{OUT(E)}$	
	MIN.	MAX.	MIN.	MAX.
5.0	4.900	5.100	4.825	5.150
5.1	4.998	5.202	4.921	5.253
5.2	5.096	5.304	5.018	5.356
5.3	5.194	5.406	5.114	5.459
5.4	5.292	5.508	5.211	5.562
5.5	5.390	5.610	5.307	5.665
5.6	5.488	5.712	5.404	5.768
5.7	5.586	5.814	5.500	5.871
5.8	5.684	5.916	5.597	5.974
5.9	5.782	6.018	5.693	6.077
6.0	5.880	6.120	5.790	6.180
6.1	5.978	6.222	5.886	6.283
6.2	6.076	6.324	5.983	6.386
6.3	6.174	6.426	6.079	6.489
6.4	6.272	6.528	6.176	6.592
6.5	6.370	6.630	6.272	6.695
6.6	6.468	6.732	6.369	6.798
6.7	6.566	6.834	6.465	6.901
6.8	6.664	6.936	6.562	7.004
6.9	6.762	7.038	6.658	7.107
7.0	6.860	7.140	6.755	7.210
7.1	6.958	7.242	6.851	7.313
7.2	7.056	7.344	6.948	7.416
7.3	7.154	7.446	7.044	7.519
7.4	7.252	7.548	7.141	7.622
7.5	7.350	7.650	7.237	7.725
7.6	7.448	7.752	7.334	7.828
7.7	7.546	7.854	7.430	7.931
7.8	7.644	7.956	7.527	8.034
7.9	7.742	8.058	7.623	8.137

■ELECTRICAL CHARACTERISTICS (Continued)

●Voltage Chart 2 (XE6216 Series)

SYMBOL	E-0-1		E-0-2	
Temperature /Ta	25℃		-40 ~ 85℃	
PARAMETER / NOMINAL OUTPUT VOLTAGE(V)	OUTPUT VOLTAGE (V) Accuracy ±2%		OUTPUT VOLTAGE (V) Accuracy +3% , -3.5%	
$V_{OUT(T)}$	$V_{OUT(E)}$		$V_{OUT(E)}$	
	MIN.	MAX.	MIN.	MAX.
8.0	7.840	8.160	7.720	8.240
8.1	7.938	8.262	7.816	8.343
8.2	8.036	8.364	7.913	8.446
8.3	8.134	8.466	8.009	8.549
8.4	8.232	8.568	8.106	8.652
8.5	8.330	8.670	8.202	8.755
8.6	8.428	8.772	8.299	8.858
8.7	8.526	8.874	8.395	8.961
8.8	8.624	8.976	8.492	9.064
8.9	8.722	9.078	8.588	9.167
9.0	8.820	9.180	8.685	9.270
9.1	8.918	9.282	8.781	9.373
9.2	9.016	9.384	8.878	9.476
9.3	9.114	9.486	8.974	9.579
9.4	9.212	9.588	9.071	9.682
9.5	9.310	9.690	9.167	9.785
9.6	9.408	9.792	9.264	9.888
9.7	9.506	9.894	9.360	9.991
9.8	9.604	9.996	9.457	10.094
9.9	9.702	10.098	9.553	10.197
10.0	9.800	10.200	9.650	10.300
10.1	9.898	10.302	9.747	10.403
10.2	9.996	10.404	9.843	10.506
10.3	10.094	10.506	9.940	10.609
10.4	10.192	10.608	10.036	10.712
10.5	10.290	10.710	10.133	10.815
10.6	10.388	10.812	10.229	10.918
10.7	10.486	10.914	10.326	11.021
10.8	10.584	11.016	10.422	11.124
10.9	10.682	11.118	10.519	11.227
11.0	10.780	11.220	10.615	11.330
11.1	10.878	11.322	10.712	11.433
11.2	10.976	11.424	10.808	11.536
11.3	11.074	11.526	10.905	11.639
11.4	11.172	11.628	11.001	11.742
11.5	11.270	11.730	11.098	11.845
11.6	11.368	11.832	11.194	11.948
11.7	11.466	11.934	11.291	12.051
11.8	11.564	12.036	11.387	12.154
11.9	11.662	12.138	11.484	12.257
12.0	11.760	12.240	11.580	12.360

■ELECTRICAL CHARACTERISTICS (Continued)

●Voltage Chart 3 (XE6216 Series)

SYMBOL	E-1-1		E-1-2		E-2-1		E-2-2		E-3-1		E-3-2	
Temperature /Ta	25℃		-40 ~ 85℃		25℃		-40 ~ 85℃		25℃		-40 ~ 85℃	
PARAMETER / NOMINAL OUTPUT VOLTAGE(V)	LOAD REGULATION (mV)		LOAD REGULATION (mV)		DROPOUT VOLTAGE 1 (mV) I_{OUT}=20mA		DROPOUT VOLTAGE 1 (mV) I_{OUT}=20mA		DROPOUT VOLTAGE 2 (mV) I_{OUT}=100mA		DROPOUT VOLTAGE 2 (mV) I_{OUT}=100mA	
$V_{OUT(T)}$ (V)	ΔV_{OUT}		ΔV_{OUT}		Vdif1		Vdif1		Vdif2		Vdif2	
	TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	TYP.	MAX.
2.0	50	90	50	103	450	600	450	735	1900	2600	1900	3060
2.1												
2.2					390	520	390	675	1700	2200	1700	2760
2.3												
2.4												
2.5					310	450	310	620	1500	1900	1500	2620
2.6												
2.7												
2.8												
2.9												
3.0					260	360	260	520	1300	1700	1300	2370
3.1												
3.2												
3.3												
3.4												
3.5												
3.6												
3.7												
3.8												
3.9												
4.0					220	320	220	410	1100	1500	1100	2045
4.1												
4.2												
4.3												
4.4												
4.5												
4.6												
4.7												
4.8												
4.9												

■ELECTRICAL CHARACTERISTICS (Continued)

●Voltage Chart 4 (XE6216 Series)

SYMBOL	E-1-1		E-1-2		E-2-1		E-2-2		E-3-1		E-3-2	
Temperature / Ta	25℃		-40 ~ 85℃		25℃		-40 ~ 85℃		25℃		-40 ~ 85℃	
PARAMETER / NOMINAL OUTPUT VOLTAGE(V)	LOAD REGULATION (mV)		LOAD REGULATION (mV)		DROPOUT VOLTAGE 1 (mV) I_{OUT}=20mA		DROPOUT VOLTAGE 1 (mV) I_{OUT}=20mA		DROPOUT VOLTAGE 2 (mV) I_{OUT}=100mA		DROPOUT VOLTAGE 2 (mV) I_{OUT}=100mA	
$V_{OUT(T)}$ (V)	ΔV_{OUT}		ΔV_{OUT}		Vdif1		Vdif1		Vdif2		Vdif2	
	TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	TYP.	MAX.
5.0	50	90	50	103	190	280	190	380	1000	1300	1000	1730
5.1												
5.2												
5.3												
5.4												
5.5												
5.6												
5.7												
5.8												
5.9												
6.0												
6.1												
6.2												
6.3												
6.4												
6.5					170	230	170	340	800	1150	800	1580
6.6												
6.7												
6.8												
6.9												
7.0												
7.1	110	140	110	150								
7.2												
7.3												
7.4												
7.5												
7.6												
7.7												
7.8												
7.9												
8.0												

■ELECTRICAL CHARACTERISTICS (Continued)


●Voltage Chart 5 (XE6216 Series)

SYMBOL	E-1-1		E-1-2		E-2-1		E-2-2		E-3-1		E-3-2	
Temperature / Ta	25℃		-40 ~ 85℃		25℃		-40 ~ 85℃		25℃		-40 ~ 85℃	
PARAMETER / NOMINAL OUTPUT VOLTAGE(V)	LOAD REGULATION (mV)		LOAD REGULATION (mV)		DROPOUT VOLTAGE 1 (mV) I_{OUT}=20mA		DROPOUT VOLTAGE 1 (mV) I_{OUT}=20mA		DROPOUT VOLTAGE 2 (mV) I_{OUT}=100mA		DROPOUT VOLTAGE 2 (mV) I_{OUT}=100mA	
$V_{OUT(T)}$ (V)	ΔV_{OUT}		ΔV_{OUT}		Vdif1		Vdif1		Vdif2		Vdif2	
	TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	TYP.	MAX
8.1	110	140	110	150	130	190	130	320	700	950	700	1460
8.2												
8.3												
8.4												
8.5												
8.6												
8.7												
8.8												
8.9												
9.0												
9.1												
9.2												
9.3												
9.4												
9.5												
9.6												
9.7												
9.8												
9.9												
10.0												
10.1					120	160	120	285	650	850	650	1160
10.2												
10.3												
10.4												
10.5												
10.6												
10.7												
10.8												
10.9												
11.0												
11.1												
11.2												
11.3												
11.4												
11.5												
11.6												
11.7												
11.8												
11.9												
12.0												


■ TEST CIRCUITS

Circuit ①


●XC6216B/XE6216B Type

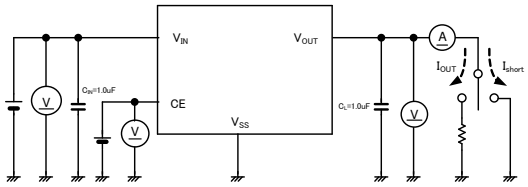

●XC6216C Type

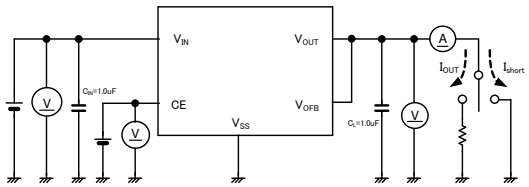


●XC6216D Type

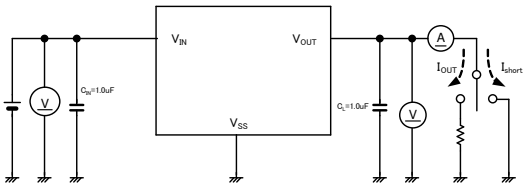


Circuit ②


●XC6216B/XE6216B Type

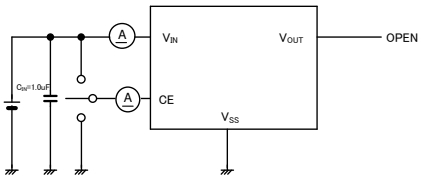

●XC6216C Type

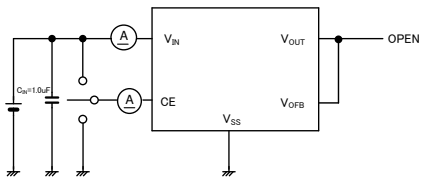


●XC6216D Type

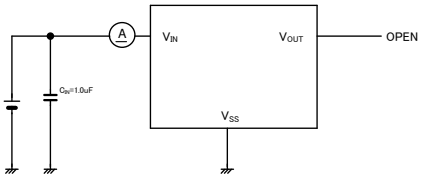


Circuit ③


●XC6216B/XE6216B Type

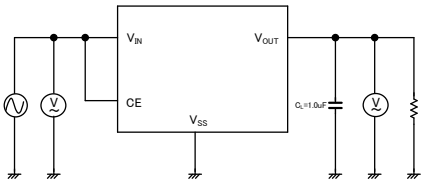

●XC6216C Type

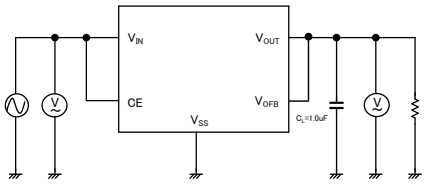


●XC6216D Type

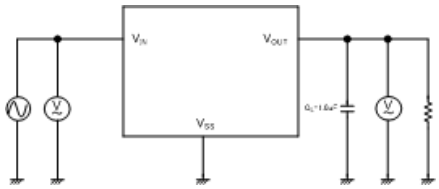

Circuit ④


●XC6216C Type



■ OPERATIONAL EXPLANATION

<Output Voltage Control>

The voltage divided by resistors R11 & R12 is compared with the internal reference voltage by the error amplifier. The P-channel MOSFET which is connected to the VOUT pin is then driven by the subsequent controlled signal. The output voltage at the VOUT pin is controlled and stabilized by a system of negative feedback. The current limit circuit and short protect circuit operate in relation to the level of output current and heat dissipation. Further, the IC's internal circuitry can be shutdown via the CE pin's signal.

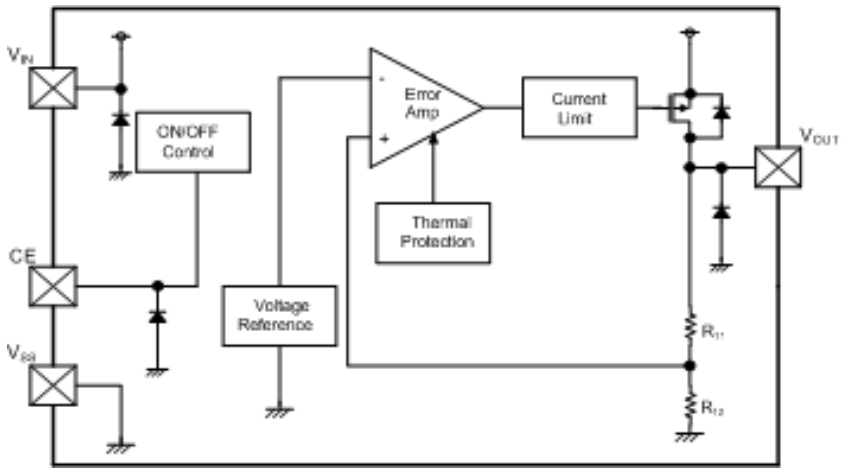

<Short-Circuit Protection>

The XC6216/XE6216 series includes a current fold-back circuit as a short circuit protection. When the load current reaches the current limit level, the current fold-back circuit operates and output voltage drops. The output voltage drops further and output current decreases. When the output pin is shorted, a current of about 30mA flows.

<CE Pin>

The IC's internal circuitry can be shutdown via the signal from the CE pin with the XC6216/XE6216 series. In shutdown mode, output at the VOUT pin will be pulled down by R11 and R12 to the VSS level. Note that as the XC6216/XE6216 series has no pull down resistor so that it will become unstable with the CE pin open. We suggest that you use this IC with either a VIN voltage or a VSS voltage input at the CE pin. If this IC is used with the correct specifications for the CE pin, the operational logic is fixed and the IC will operate normally. However, supply current may increase as a result of through current in the IC's internal circuitry if a medium voltage is applied.

<Thermal Protection>

When the junction temperature of the built-in driver transistor reaches the temperature limit, the thermal shutdown circuit operates and the driver transistor will be set to OFF. The IC resumes its operation when the thermal shutdown function is released and the IC's operation is automatically restored because the junction temperature drops to the level of the thermal shutdown release voltage.

<Minimum Operating Voltage>


For the stable operation of the IC, over 2.0V of input voltage is necessary. The output voltage may not be generated normally if the input voltage is less than 2.0V.

■ NOTES ON USE

1. Please use this IC within the stated absolute maximum ratings. The IC is liable to malfunction should the ratings be exceeded.
2. Where wiring impedance is high, operations may become unstable due to the noise and/or phase lag depending on output current. Please strengthen VIN and VSS wiring in particular.
3. Phase compensation inside the IC is performed in the XC6216/XE6216 series. Therefore, an abnormal oscillation does not occur even if there is no output capacitor CL. An input capacitor CIN around 0.1 μF~1.0 μF between the power input pin (V_{IN}) and the ground pin (V_{SS}) is required for input stability. Also, the output voltage fluctuation such as under shoot or over shoot, which occurs because of the load change can be controlled by placing the output capacitor CL around 0.1 μF~1.0 μF between the VOUT pin and VSS pin. The input capacitor (CIN) and the output capacitor (CL) should be placed to the IC as close as possible with a shorter wiring.

■ NOTES ON USE

4. Notes on setting output voltage externally (C type) Ta=25℃

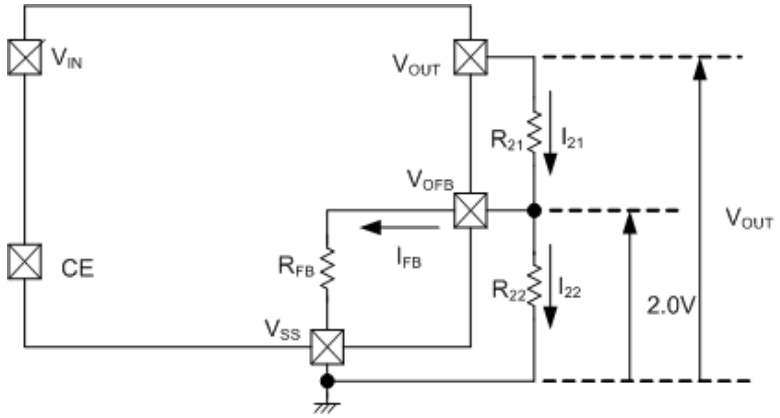

The output voltage can be set externally by the following equation:

$I_{21}=I_{FB}+I_{22}$ ..... (1)

$I_{22}=2.0V/R_{22}$ ..... (2)

$I_{21}=I_{FB}+2.0V/R_{22}$ .....

If the equation (3) is assigned to the equation (2), the equation becomes as below:

$V_{OUT}=2.0V+R_{21}・I_{21}$ ..... (3)

For this, the following equation can be used for setting output voltage externally:

$V_{OUT}=2.0V+R_{21}・I_{21}$ ..... (4)

And the equation (4) will be;

$V_{OUT}=2.0V+R_{21}・(I_{FB}+2.0V/R_{22})$ .....

$=2.0V・(R_{21}+R_{22})/R_{22}+R_{21}・I_{FB}$ ..... (5)

The second term of the equation (6), $R_{21}・I_{FB}$, is the cause of the output accuracy error.

The I_{FB} can be calculated by the following equation:

$I_{FB}=2.0V/R_{FB}$ ..... (6)


The cause of the output accuracy error, $R_{21}・I_{FB}$ can be calculated by the equation below;

$R_{21}・I_{FB}=R_{21}・2.0V/R_{FB}$

$=2.0V・R_{21}/R_{FB}$ ..... (7)

Accordingly, if $R_{21}<< R_{FB}$, the output voltage error becomes minute.

●Setting Resistance-Dependent of XC6216 Series C type's Output Voltage

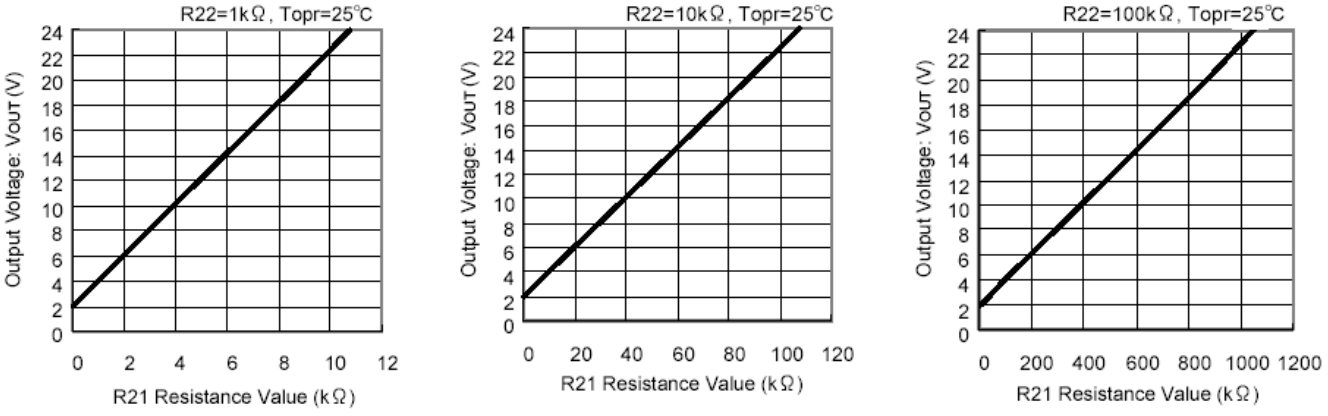


5. Torex places an importance on improving our products and its reliability.
However, by any possibility, we would request user fail-safe design and post-aging treatment on system or equipment.


■ TYPICAL PERFORMANCE CHARACTERISTICS

(1) Output Voltage vs. Output Current


XC6216B/C/D 202

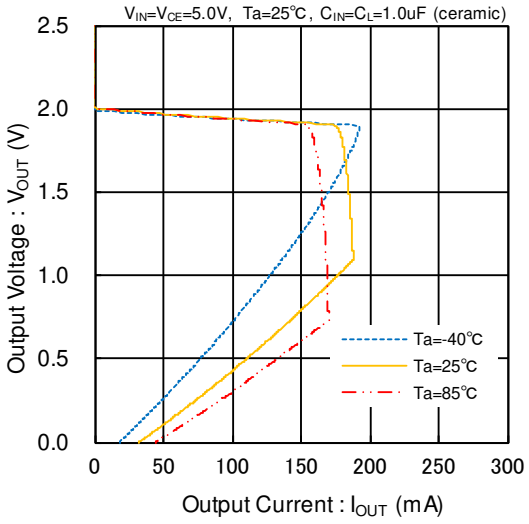


XC6216B/C/D 202

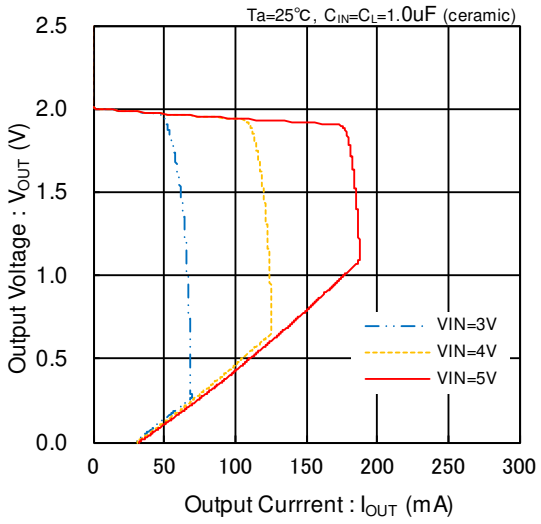


XC6216B/D 332

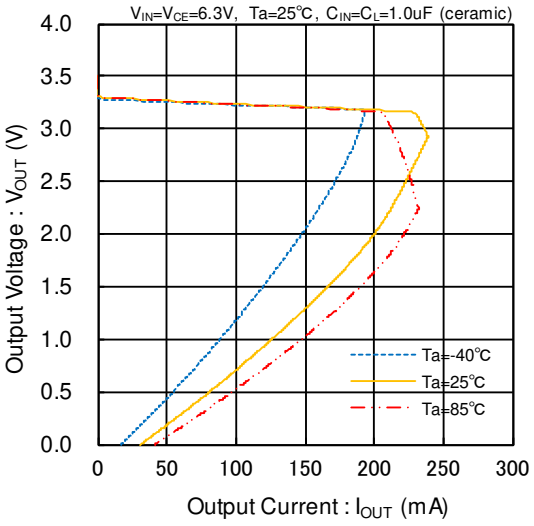


XC6216B/D 332

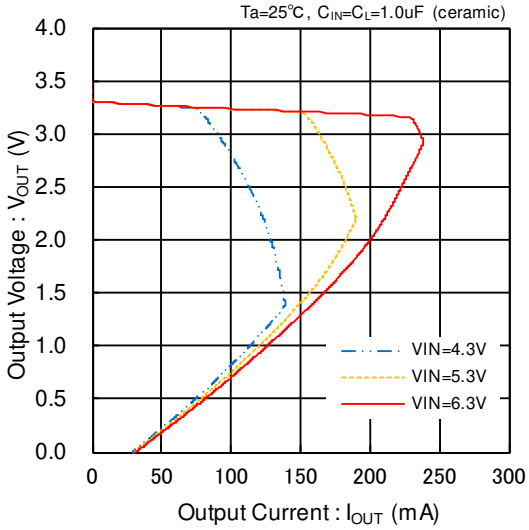

XC6216B/D 502

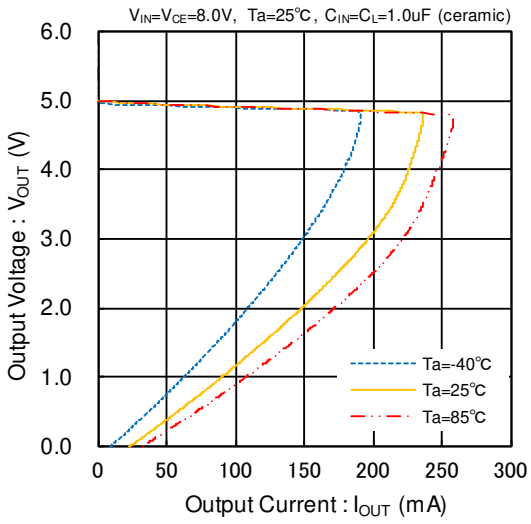


XC6216B/D 502

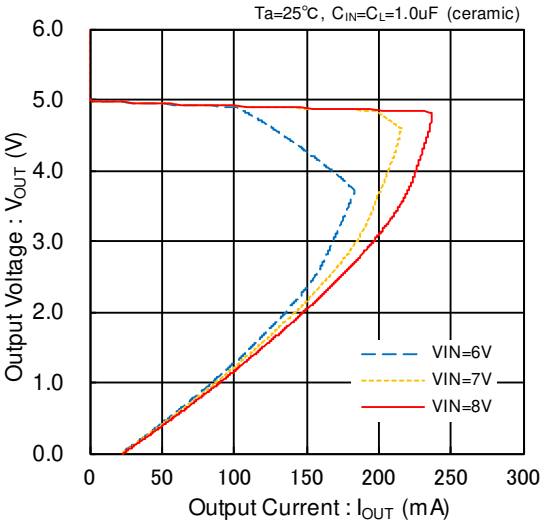


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(1) Output Voltage vs. Output Current (Continued)

XC6216B/D C02

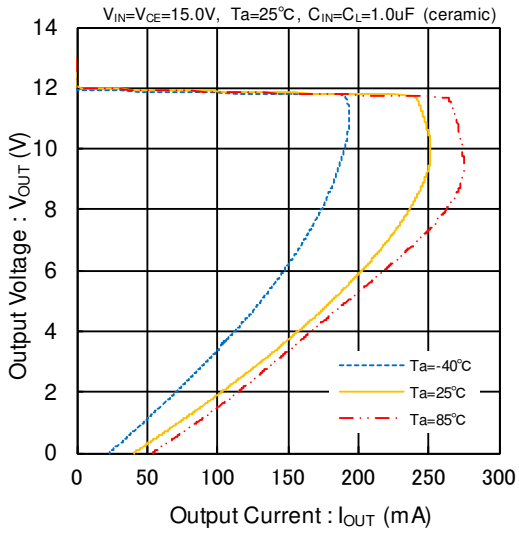


XC6216B/D C02

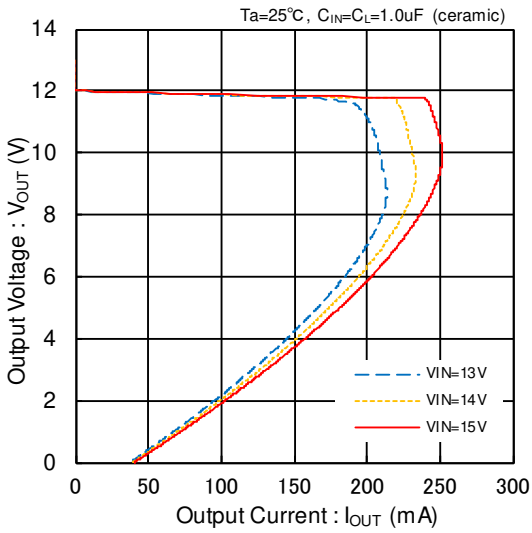


(2) Output Voltage vs. Input Voltage


XC6216B/C/D 202

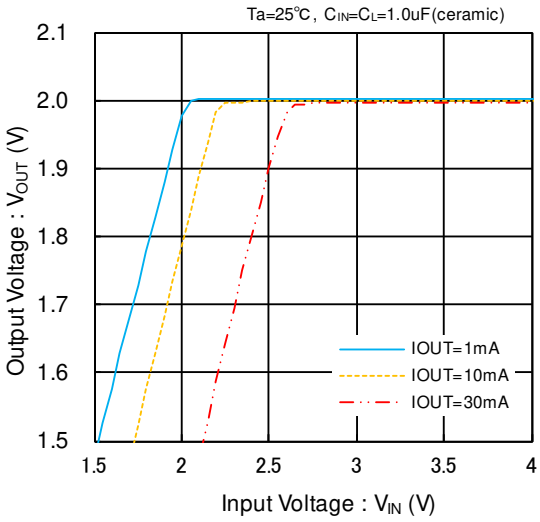


XC6216B/C/D 202

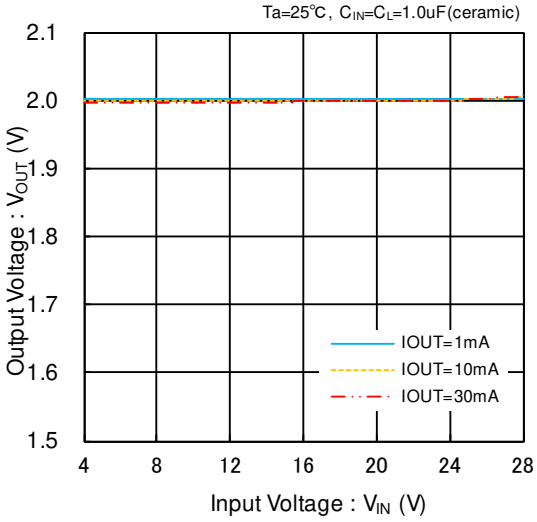

XC6216B/D 332

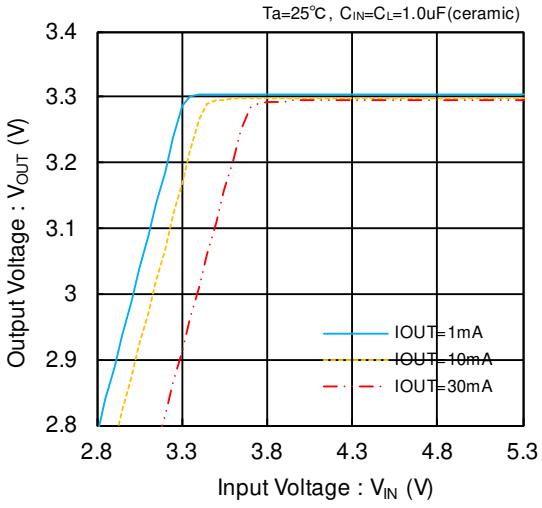


XC6216B/D 332

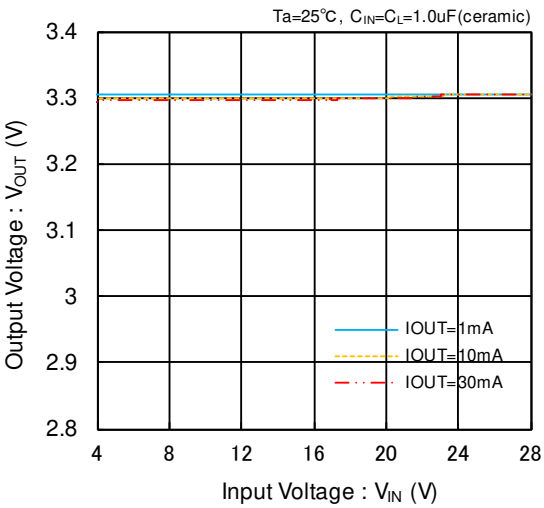


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(2) Output Voltage vs. Input Voltage (Continued)


XC6216B/D 502

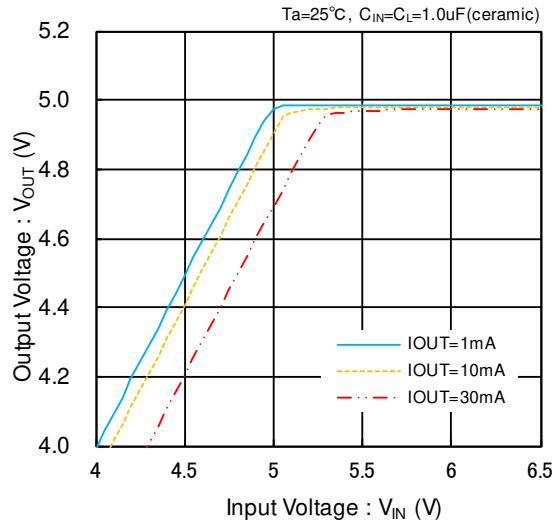


XC6216B/D 502

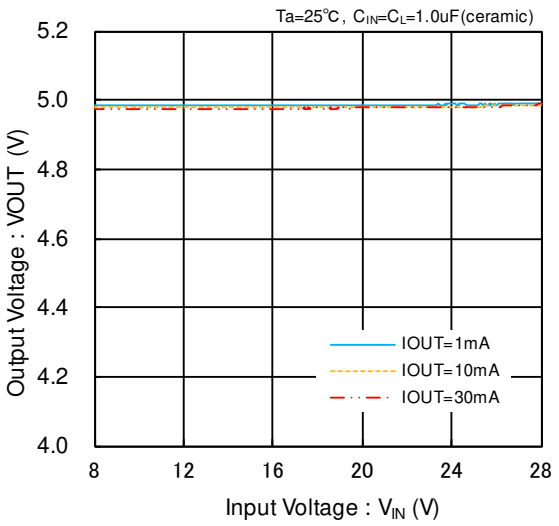

XC6216B/D C02

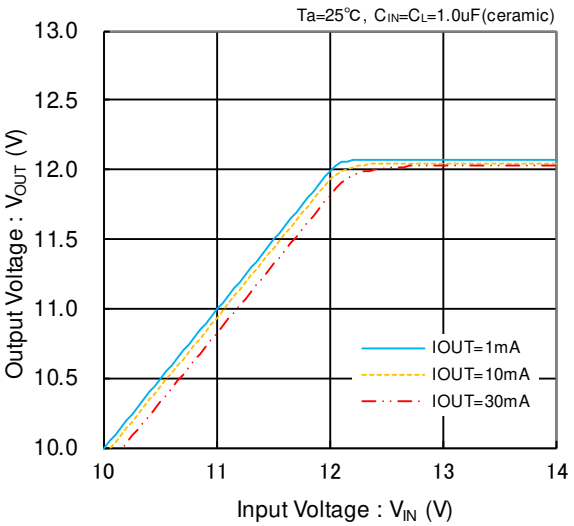


XC6216B/D C02

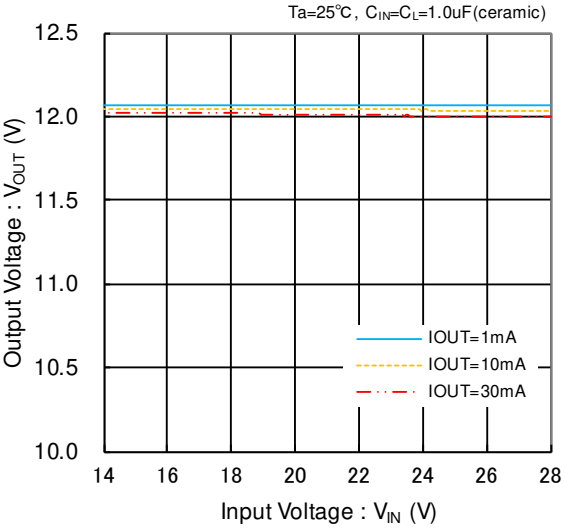


(3) Dropout Voltage vs. Output Current

XC6216B/C/D 202

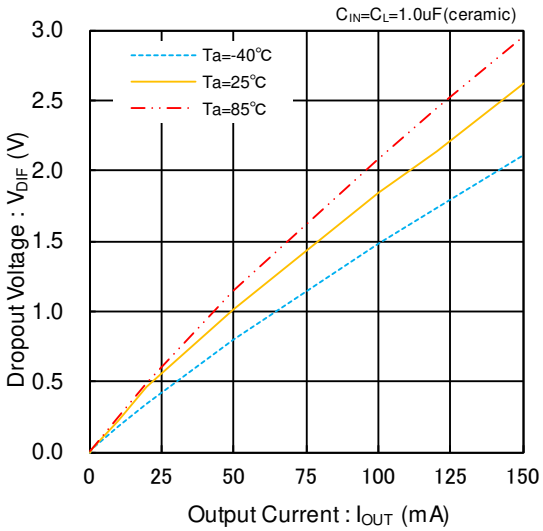


XC6216B/D 332

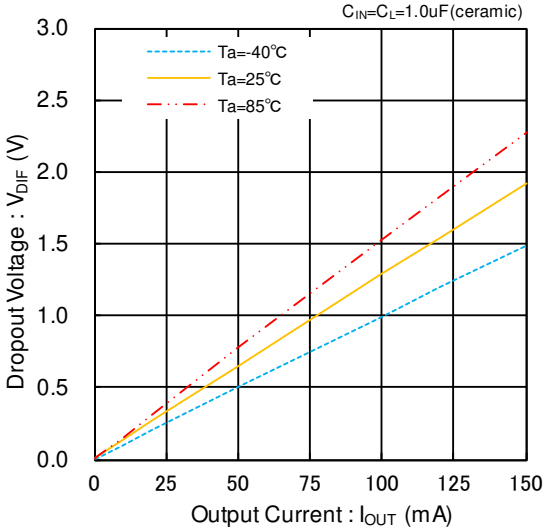


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(3) Dropout Voltage vs. Output Current (Continued)

XC6216B/D 502

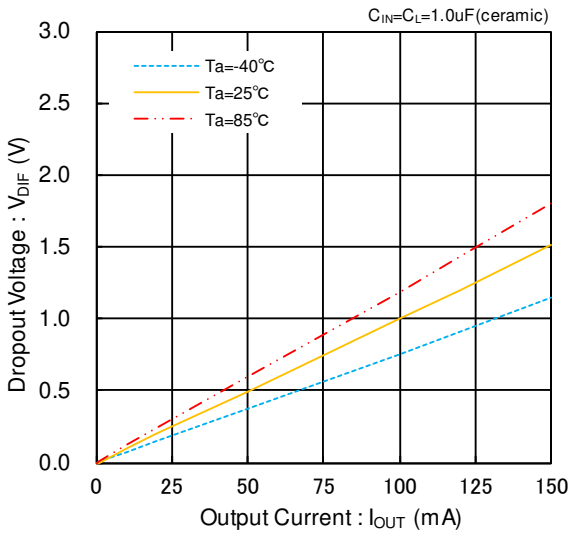


XC6216B/D C02

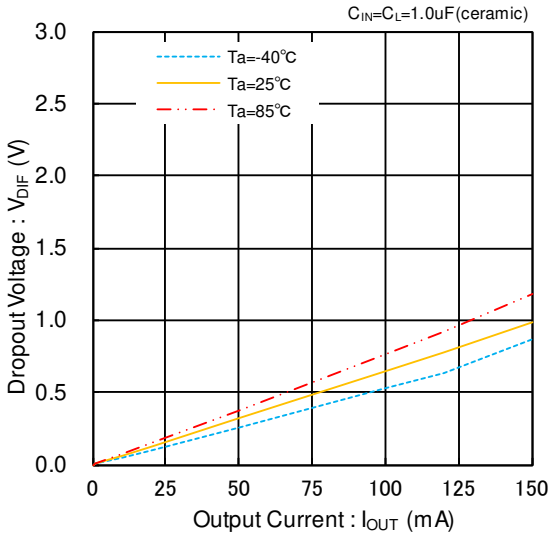


(4) Supply Current vs. Input Voltage


XC6216B/C/D 202

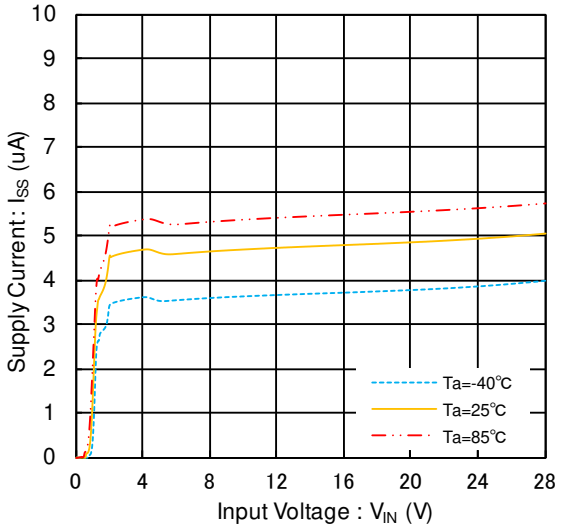


XC6216B/C/D 202

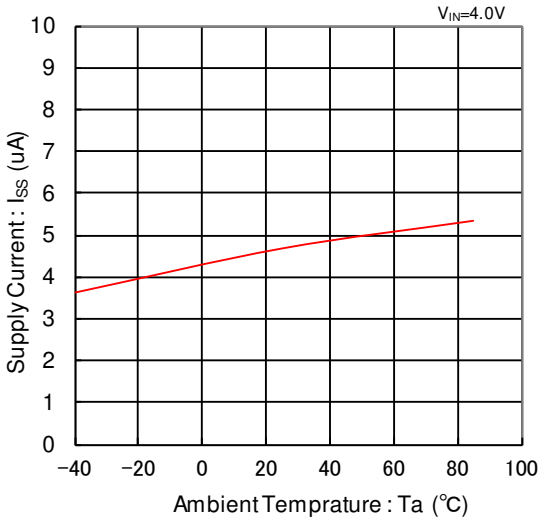

XC6216B/D 332

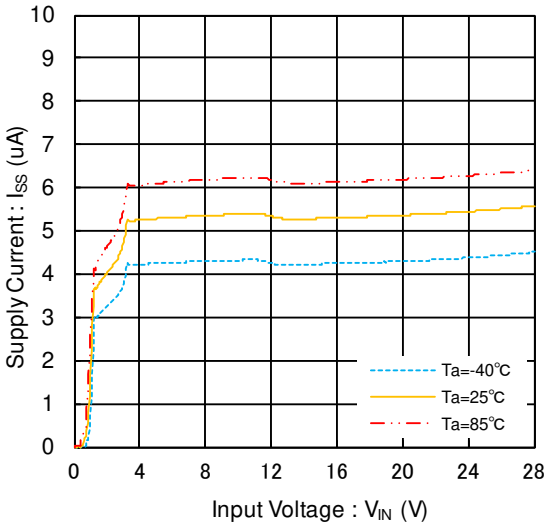


XC6216B/D 332

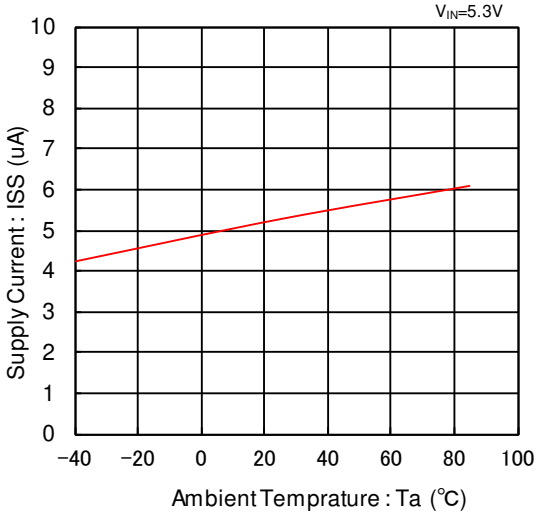


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(4) Supply Current vs. Input Voltage (Continued)


XC6216B/D 502

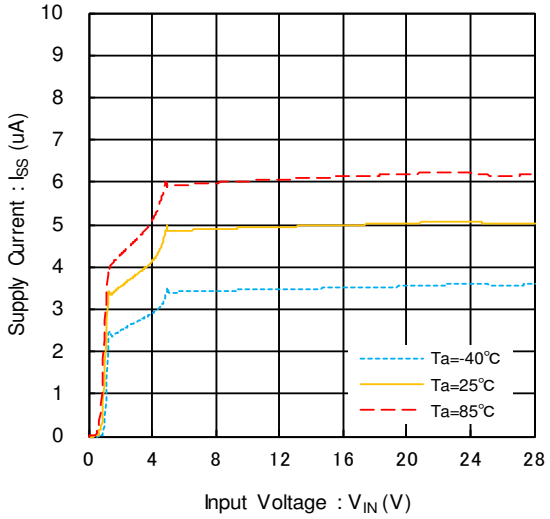


XC6216B/D 502

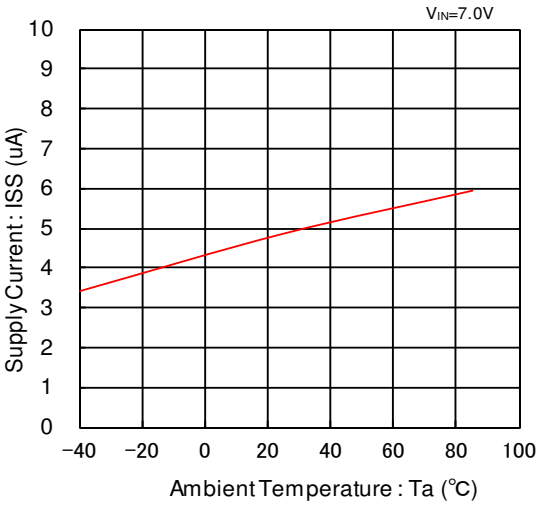

XC6216B/D C02

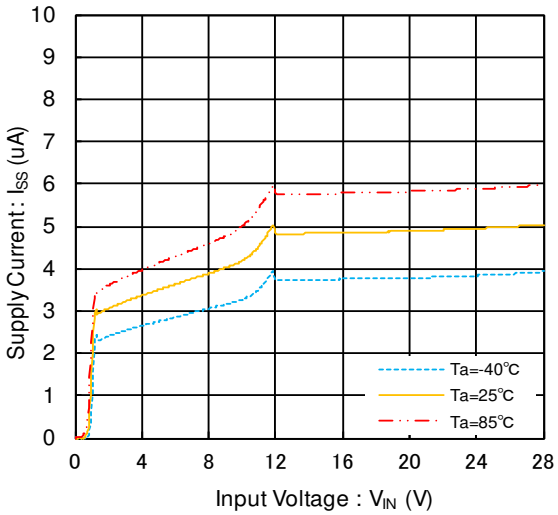


XC6216B/D C02

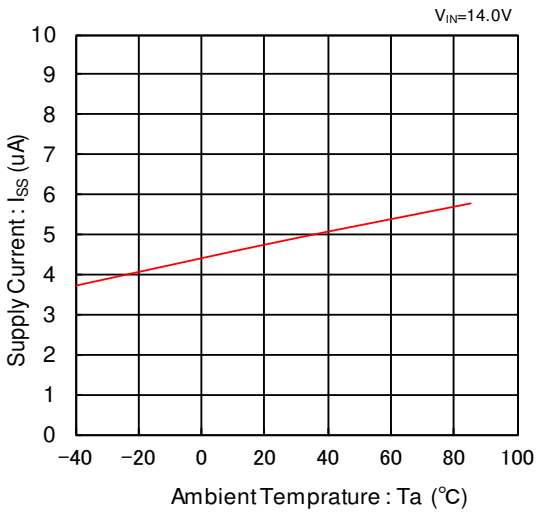


(5) Output Voltage vs. Ambient Temperature

XC621B/C/D 202

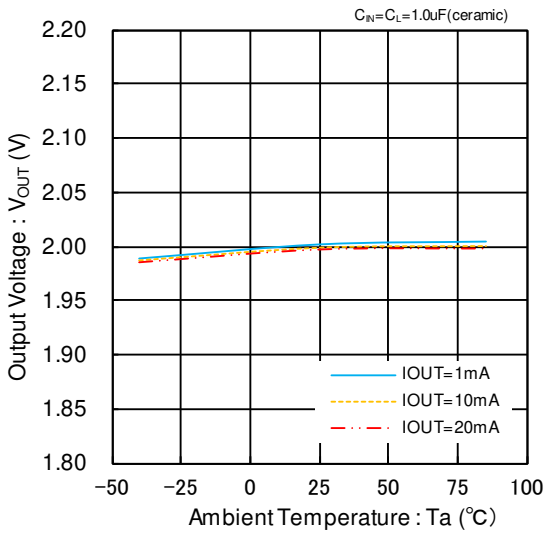


XC6216B/D 332

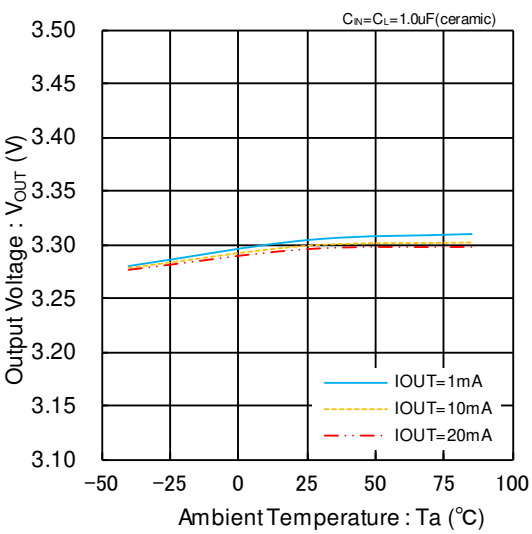


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(5) Output Voltage vs. Ambient Temperature (Continued)

XC6216B/D 502

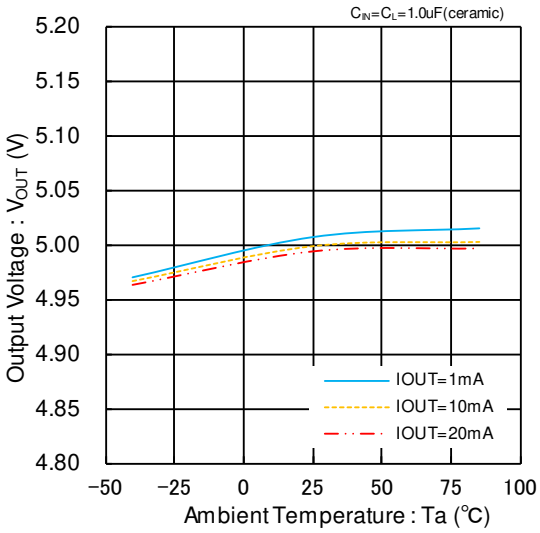


XC6216B/D C02

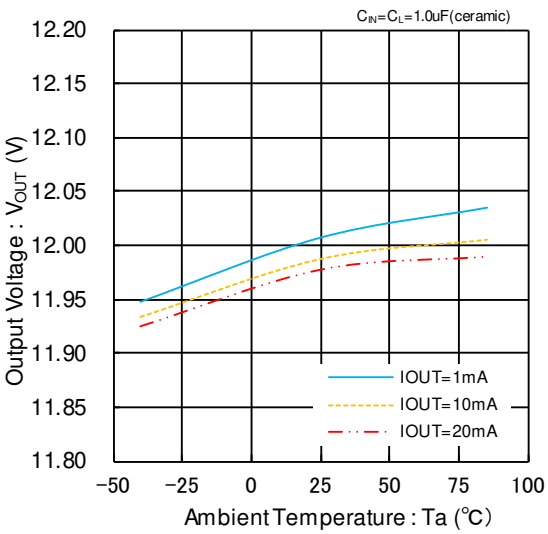


(6) Line Transient Response


XC6216B/C/D 202

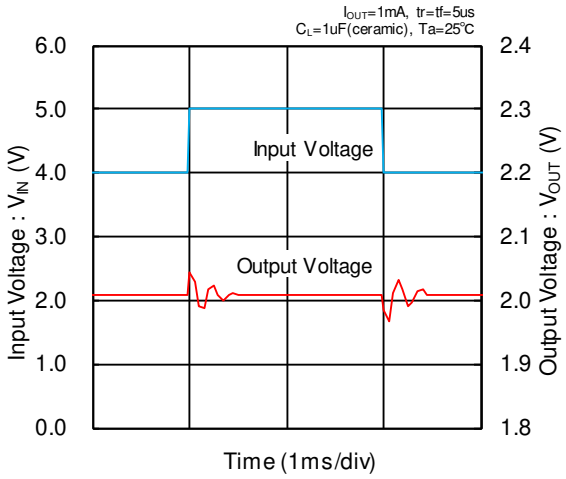


XC6216B/C/D 202

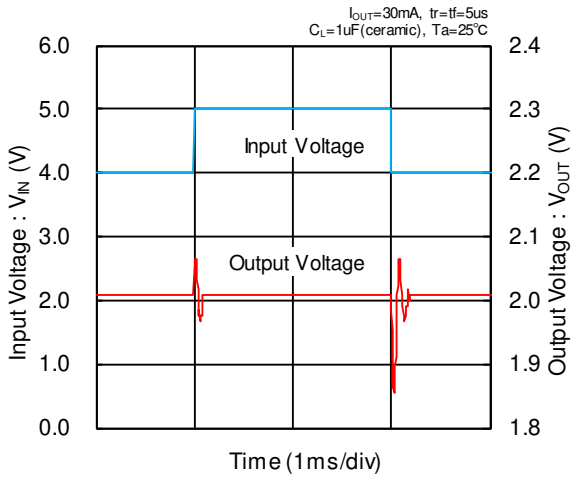

XC6216B/D 332

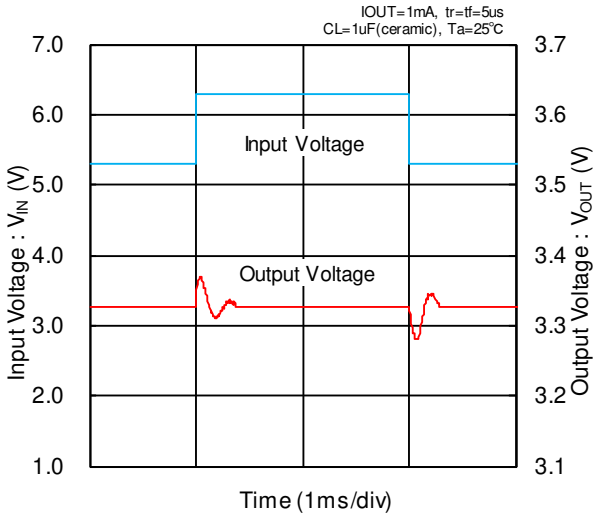


XC6216B/D 332

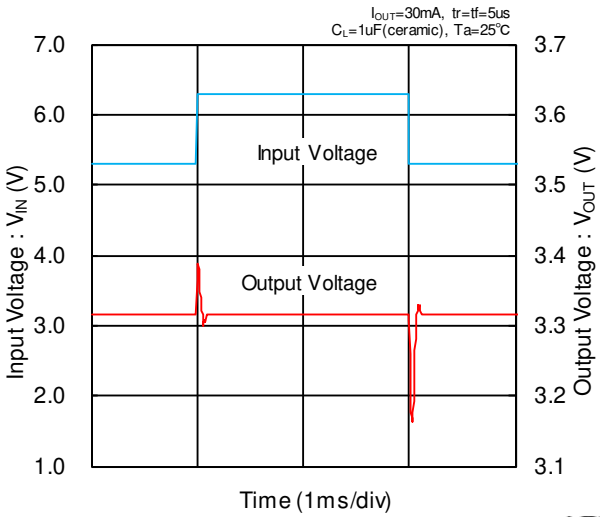


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(6) Line Transient Response (Continued)


XC6216B/D 502

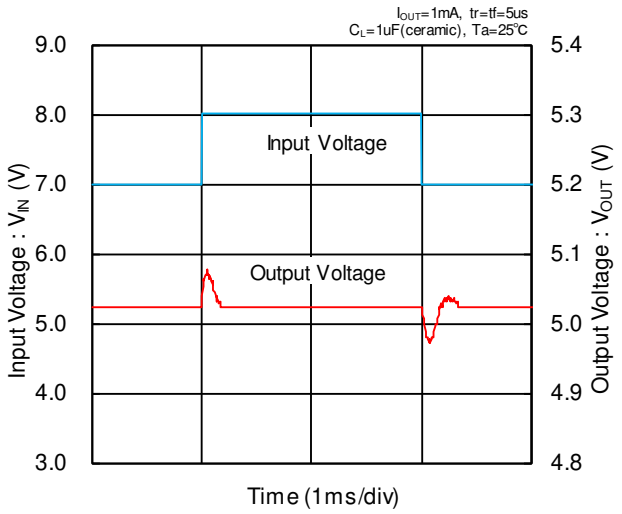


XC6216B/D 502

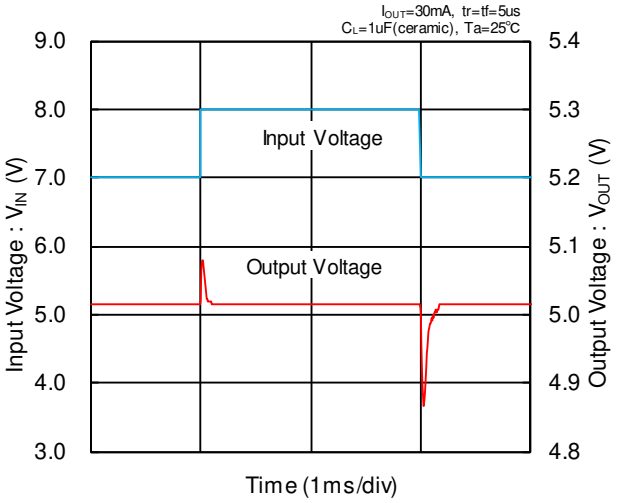

XC6216B/D C02

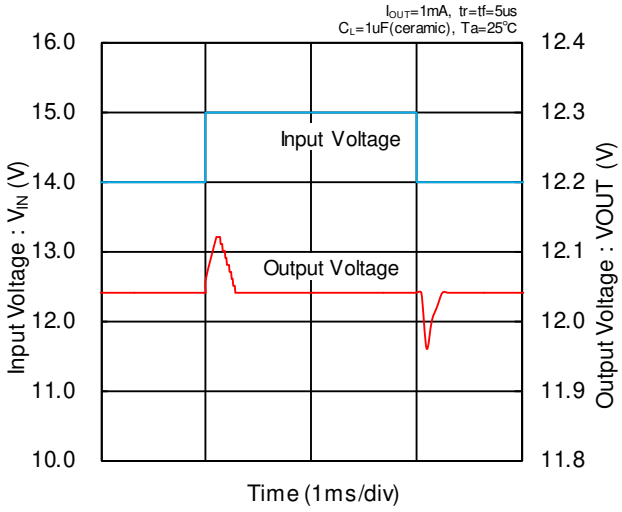


XC6216B/D C02

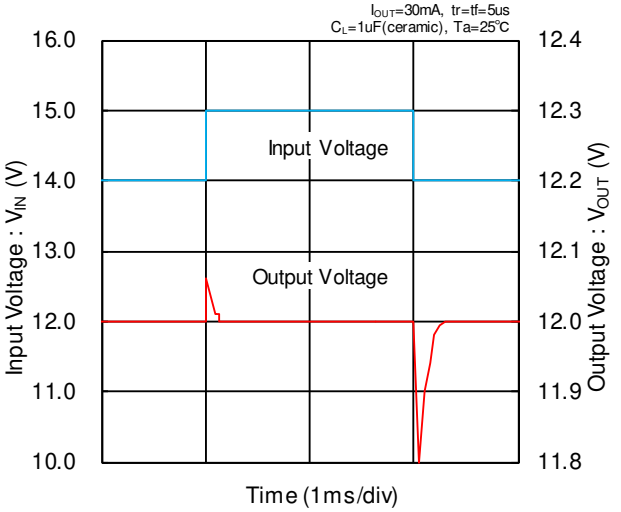


(7) Load Transient Response

XC6216B/C/D 202

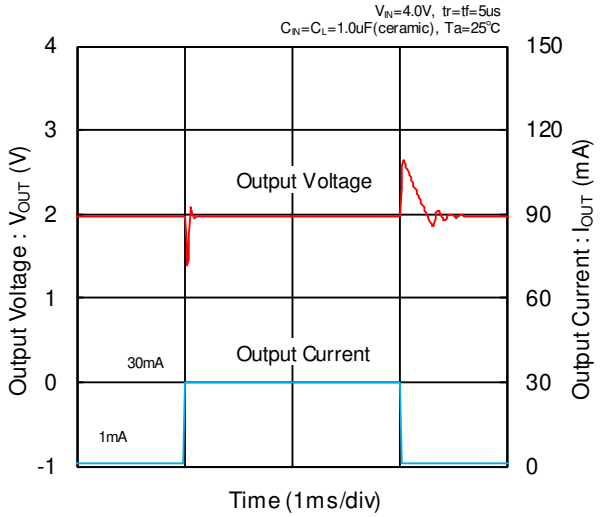


XC6216B/D 332

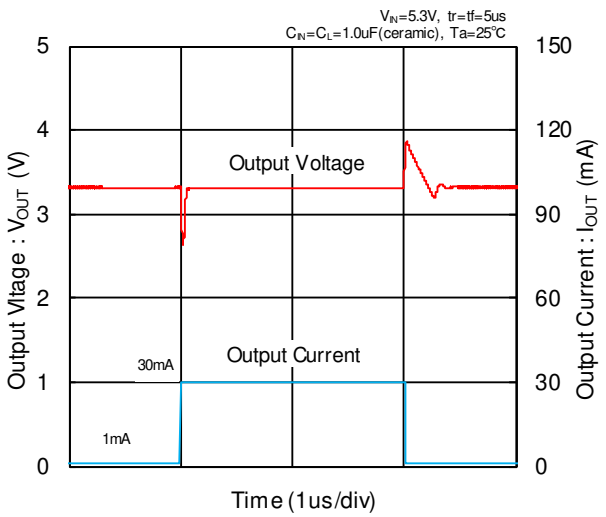


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(7) Load Transient Response (Continued)

XC6216B/D 502

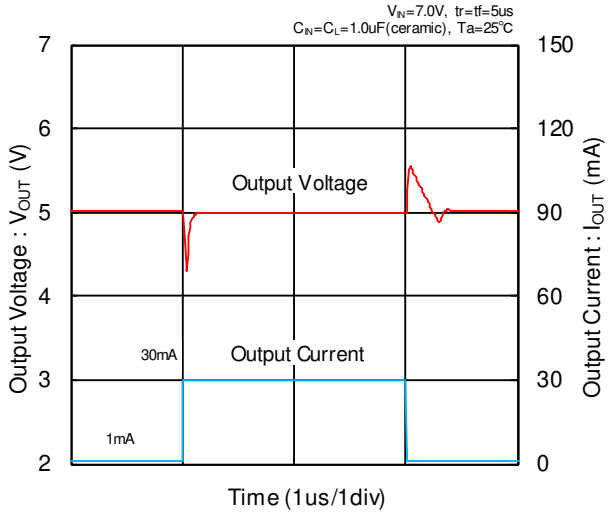


XC6216B/D C02

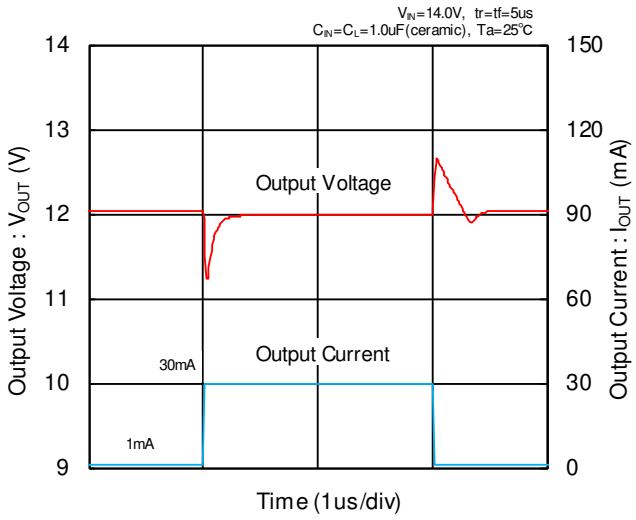


(8) Input Rise Time


XC6216B/C/D 202

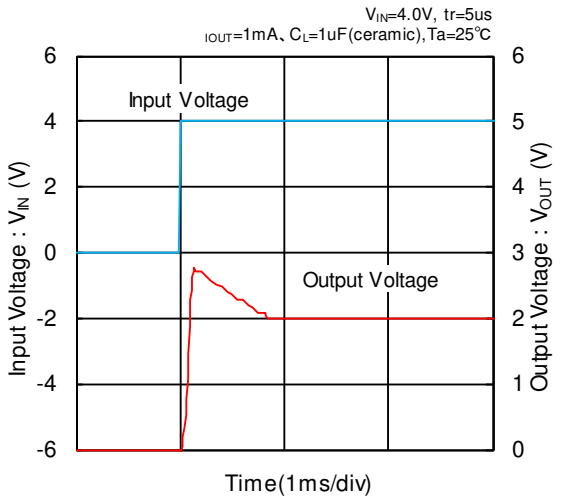


XC6216B/C/D 202

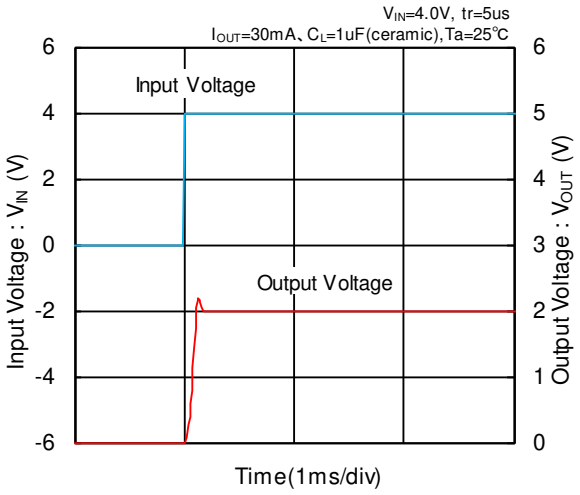

XC6216B/D 332

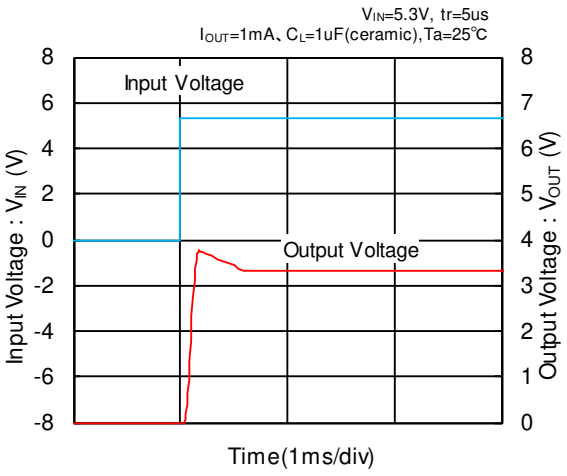


XC6216B/D 332

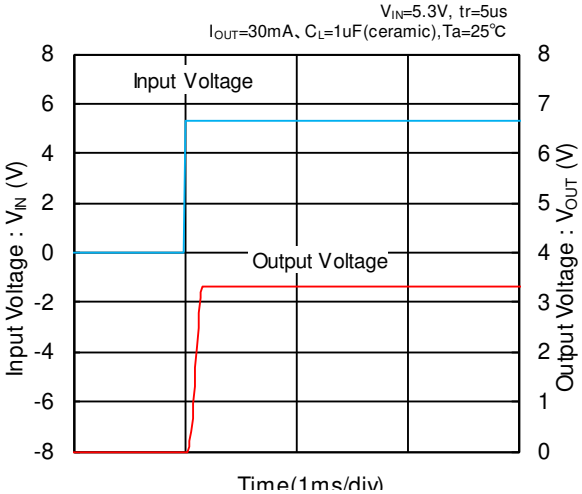


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(8) Input Rise Time (Continued)


XC6216B/D 502

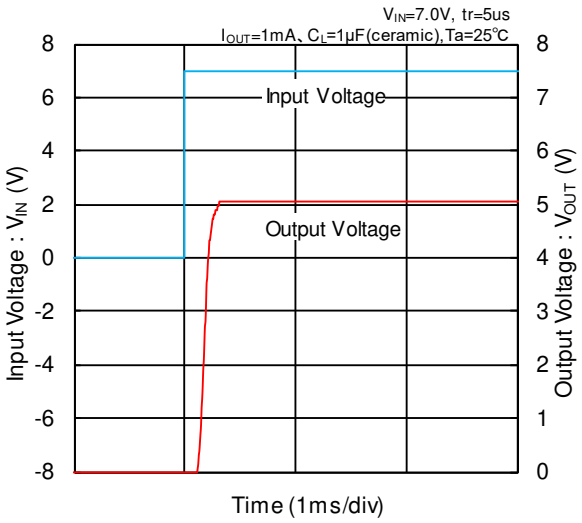


XC6216B/D 502

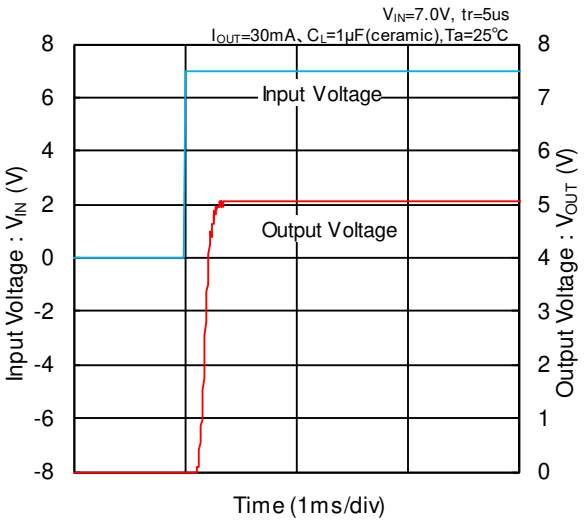

XC6216B/D C02

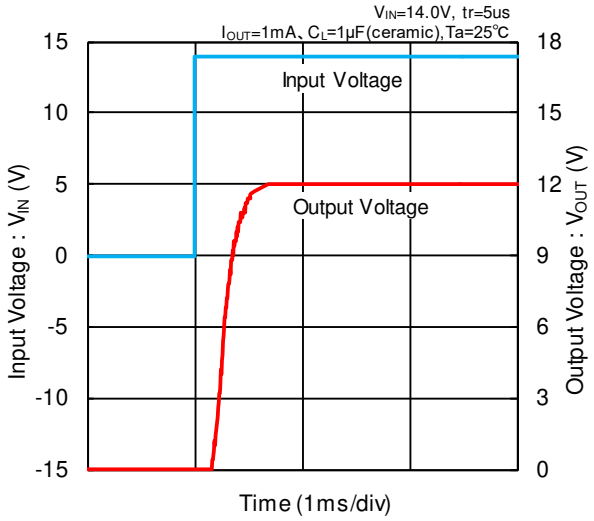


XC6216B/D C02

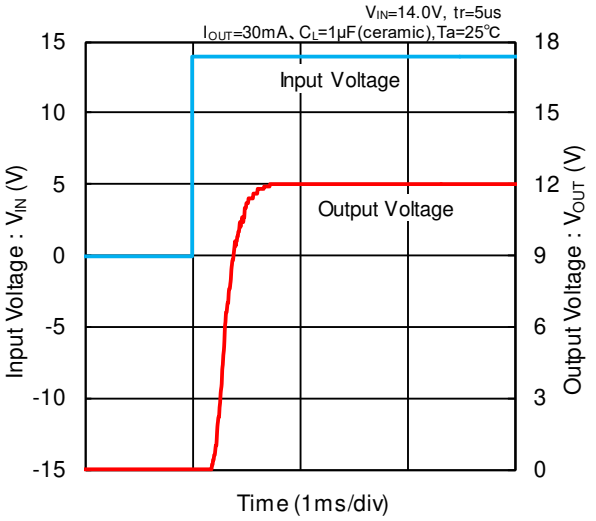


(9) CE Rise Time

XC6216B/C/D 202

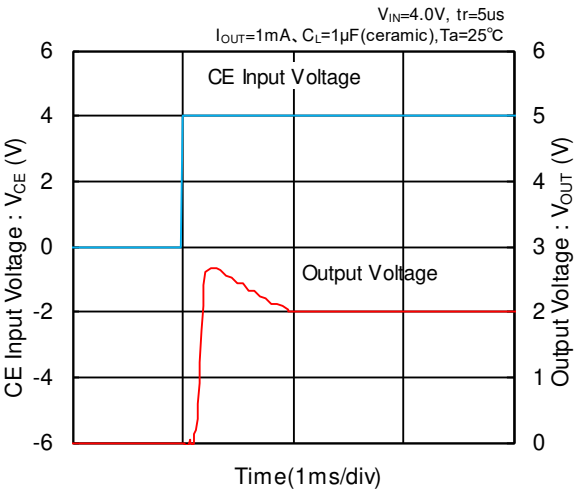


XC6216B/C/D 202

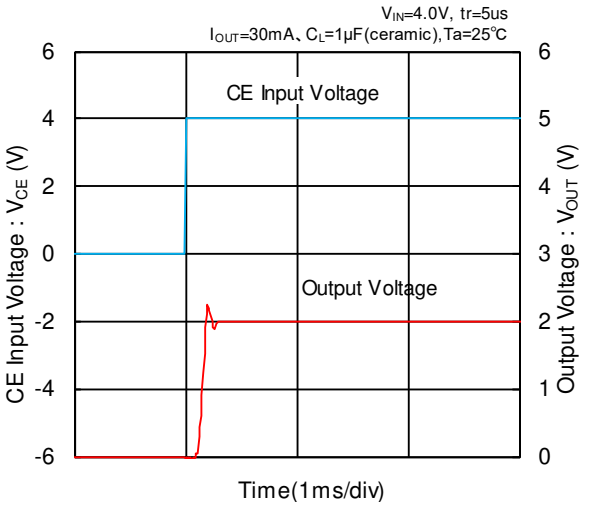


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(9) CE Rise Time (Continued)


XC6216B/D 332

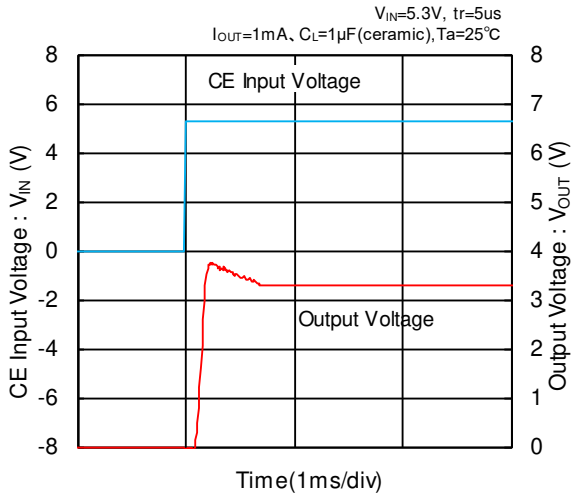


XC6216B/D 332

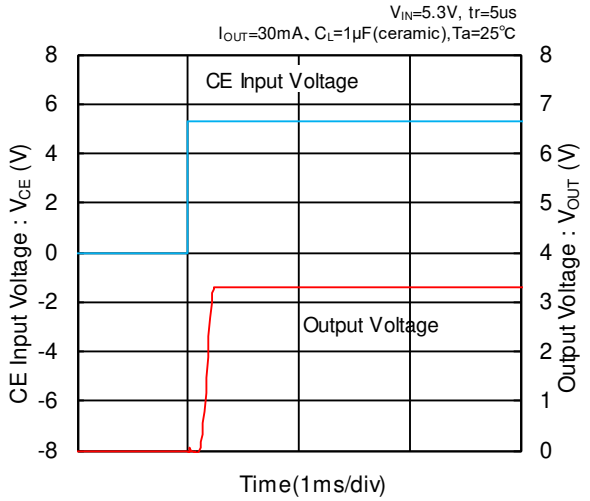


XC6216B/D 502

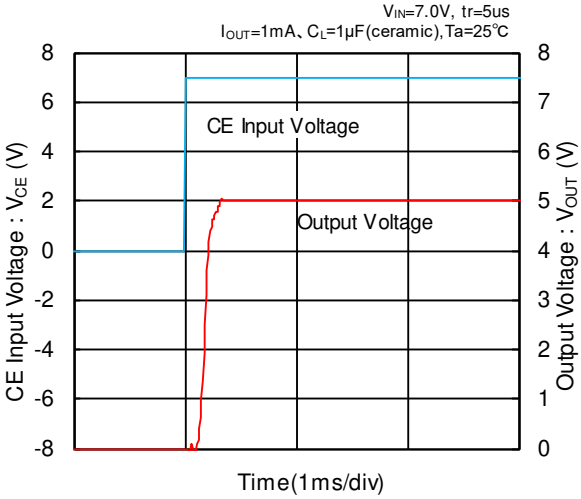


XC6216B/D 502

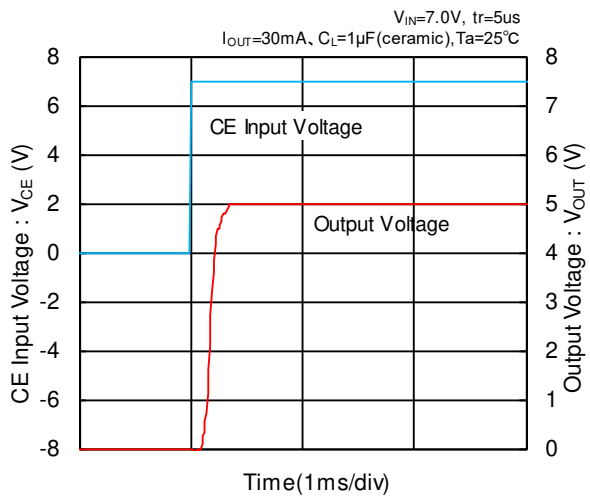

XC6216B/D C02

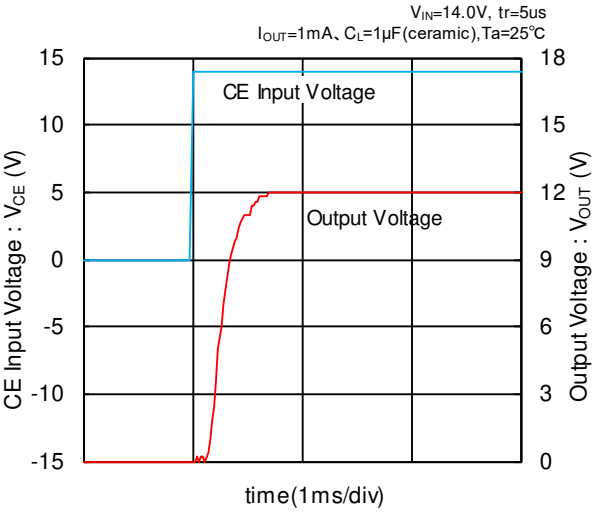


XC6216B/D C02

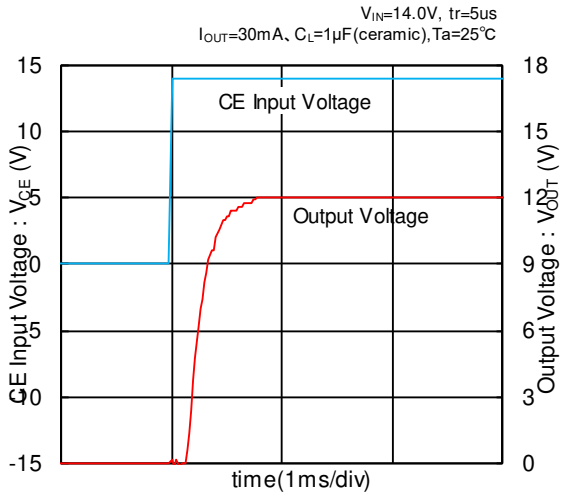


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(10) Ripple Rejection Rate


XC6216B/C/D 202

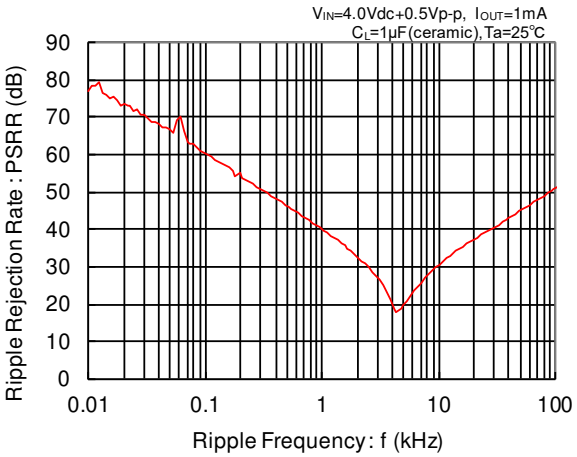


XC6216B/C/D 202

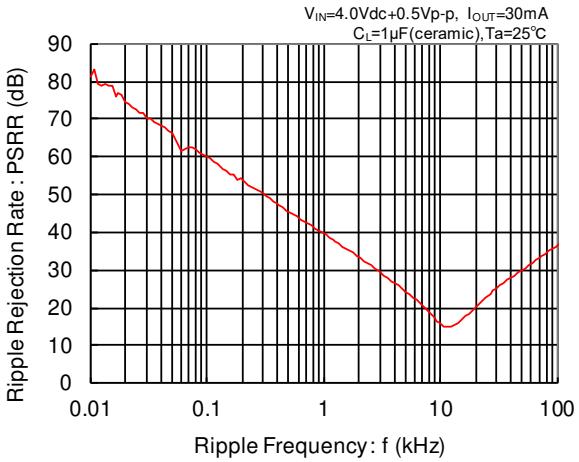


XC6216B/D 332

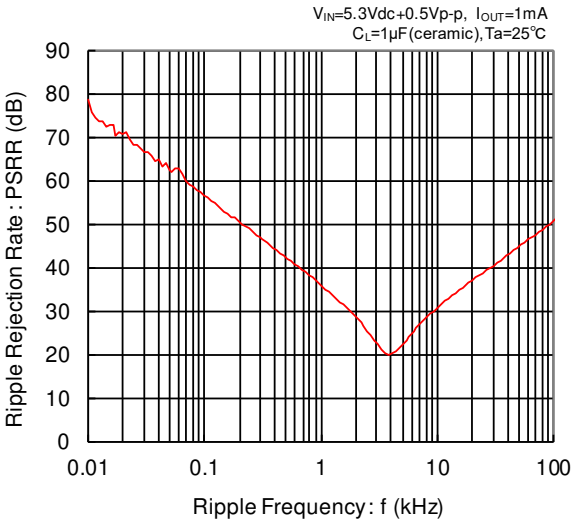


XC6216B/D 332

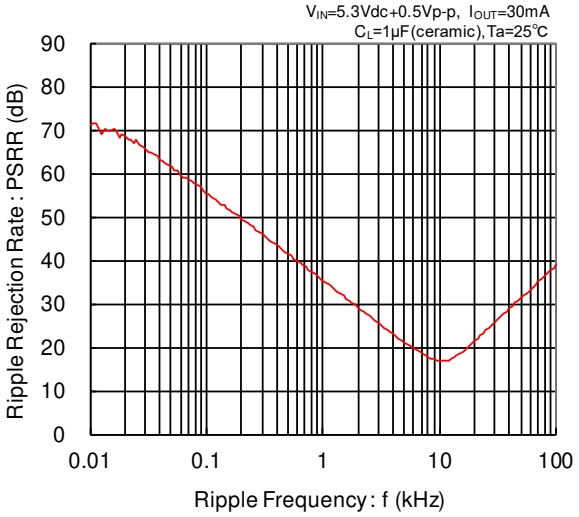

XC6216B/D 502

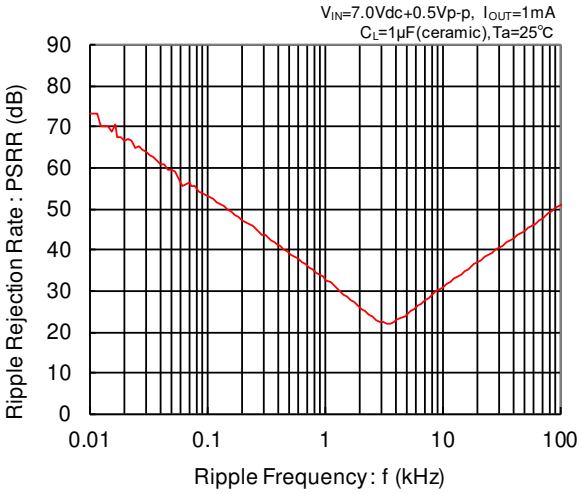


XC6216B/D 502

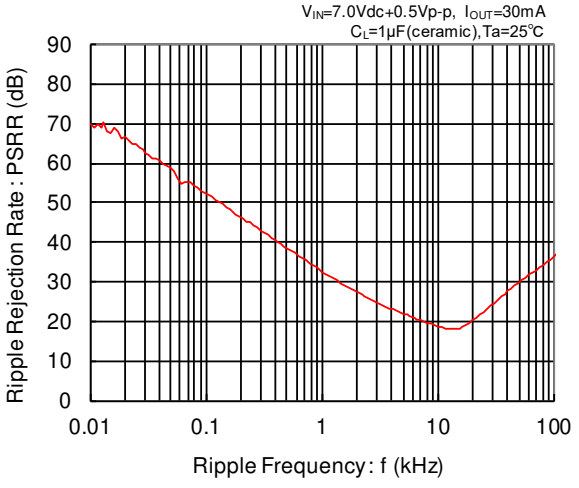


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(10) Ripple Rejection Time (Continued)

XC6216B/D C02

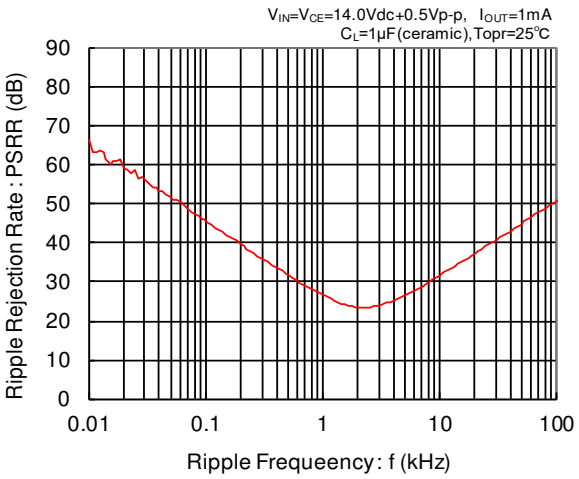

XC6216B/D C02

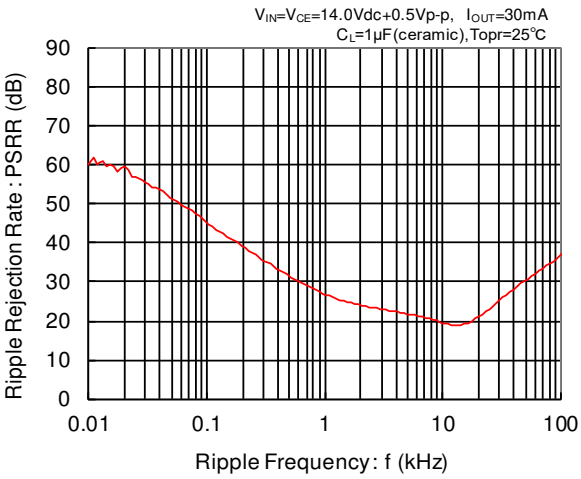


■PACKAGING INFORMATION

For the latest package information go to, www.torexsemi.com/technical-support/packages


PACKAGE	OUTLINE / LAND PATTERN	THERMAL CHARACTERISTICS	
SOT-23	SOT-23 PKG	Standard Board	SOT-23 Power Dissipation
SOT-25	SOT-25 PKG	Standard Board	SOT-25 Power Dissipation
		JESD51-7 Board	
SOT-89	SOT-89 PKG	Standard Board	SOT-89 Power Dissipation
SOT-89-5	SOT-89-5 PKG	Standard Board	SOT-89-5 Power Dissipation
		JESD51-7 Board	
SOT-223	SOT-223 PKG	Standard Board	SOT-223 Power Dissipation
TO-252	TO-252 PKG	Standard Board	TO-252 Power Dissipation
USP-6C	USP-6C PKG	Standard Board	USP-6C Power Dissipation
		JESD51-7 Board	
USP-6B06	USP-6B06 PKG	Standard Board	USP-6B06 Power Dissipation

■MARKING RULE (XC6216 Series)


●SOT-25, SOT-89,SOT-89-5,USP-6C,SOT-223,TO-252,USP-6B06, SOT-23




SOT-25




USP-6C




SOT-89




SOT-89-5




SOT-223

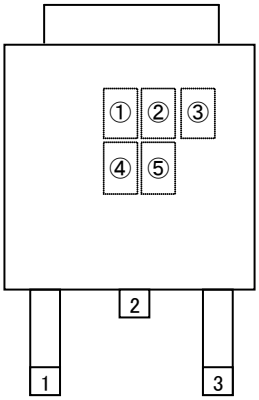

TO-252



USP-6B06



SOT-23

(mark header：①～③)　*Mark header does not change with a lot.

① represents the product series

MARK	PRODUCT SERIES
2	XC6216xxxxxx

② represents the output voltage range

MARK	VOLTAGE (V)	PRODUCT SERIES
0	1.8~3.0	XC6216Bxxxxx
1	3.1~6.0	
2	6.1~9.0	
3	9.1~12.0	
4	1.8~3.0	XC6216Dxxxxx
5	3.1~6.0	
6	6.1~9.0	
7	9.1~12.0	
8	2.0	XC6216Cxxxxx

■MARKING RULE (XC6216 Series) (Continued)


③ represents the output voltage

MARK	VOLTAGE(V)				MARK	VOLTAGE(V)			
0	-	3.1	6.1	9.1	F	-	4.6	7.6	10.6
1	-	3.2	6.2	9.2	H	-	4.7	7.7	10.7
2	-	3.3	6.3	9.3	K	1.8	4.8	7.8	10.8
3	-	3.4	6.4	9.4	L	1.9	4.9	7.9	10.9
4	-	3.5	6.5	9.5	M	2.0	5.0	8.0	11.0
5	-	3.6	6.6	9.6	N	2.1	5.1	8.1	11.1
6	-	3.7	6.7	9.7	P	2.2	5.2	8.2	11.2
7	-	3.8	6.8	9.8	R	2.3	5.3	8.3	11.3
8	-	3.9	6.9	9.9	S	2.4	5.4	8.4	11.4
9	-	4.0	7.0	10.0	T	2.5	5.5	8.5	11.5
A	-	4.1	7.1	10.1	U	2.6	5.6	8.6	11.6
B	-	4.2	7.2	10.2	V	2.7	5.7	8.7	11.7
C	-	4.3	7.3	10.3	X	2.8	5.8	8.8	11.8
D	-	4.4	7.4	10.4	Y	2.9	5.9	8.9	11.9
E	-	4.5	7.5	10.5	Z	3.0	6.0	9.0	12.0

④⑤ represents assembly lot number
01 to 09, 0A to 0Z, 11 to 9Z, A1 to A9, AA to AZ, B1 to ZZ repeated (G, I, J, O, Q, W excluded)
Note: No character inversion used.

■MARKING RULE (XE6216 Series)

●SOT-89-5



SOT-89-5

① represents the product series

MARK	PRODUCT SERIES
2	XE6216xxxxxx

② represents the output voltage range

MARK	VOLTAGE (V)	PRODUCT SERIES
0	2.0~3.0	XE6216Bxxxxx
1	3.1~6.0	
2	6.1~9.0	
3	9.1~12.0	

MARK	VOLTAGE(V)				MARK	VOLTAGE(V)			
0	-	3.1	6.1	9.1	F	-	4.6	7.6	10.6
1	-	3.2	6.2	9.2	H	-	4.7	7.7	10.7
2	-	3.3	6.3	9.3	K	-	4.8	7.8	10.8
3	-	3.4	6.4	9.4	L	-	4.9	7.9	10.9
4	-	3.5	6.5	9.5	M	2.0	5.0	8.0	11.0
5	-	3.6	6.6	9.6	N	2.1	5.1	8.1	11.1
6	-	3.7	6.7	9.7	P	2.2	5.2	8.2	11.2
7	-	3.8	6.8	9.8	R	2.3	5.3	8.3	11.3
8	-	3.9	6.9	9.9	S	2.4	5.4	8.4	11.4
9	-	4.0	7.0	10.0	T	2.5	5.5	8.5	11.5
A	-	4.1	7.1	10.1	U	2.6	5.6	8.6	11.6
B	-	4.2	7.2	10.2	V	2.7	5.7	8.7	11.7
C	-	4.3	7.3	10.3	X	2.8	5.8	8.8	11.8
D	-	4.4	7.4	10.4	Y	2.9	5.9	8.9	11.9
E	-	4.5	7.5	10.5	Z	3.0	6.0	9.0	12.0

④ represents assembly lot number

0,・・・,9, A,B,・・・,Z,0,・・・,9,A,B,・・・,Z,0,・・・ repeated (G, I, J, O, Q, W excluded)

Bar marking of a-b-c-d combination represents production year.

Production Year	a	b	c	d
xxx0	□	-	-	-
xxx1	-	□	-	-
xxx2	-	-	□	-
xxx3	-	-	-	□
xxx4	□	□	-	-
xxx5	□	-	□	-
xxx6	□	-	-	□
xxx7	-	□	□	-
xxx8	-	□	-	□
xxx9	-	-	□	□

Bar marking of e-f-g-h combination represents production month.

Production Month	e	f	g	h
January	□	-	-	-
February	-	□	-	-
March	-	-	□	-
April	-	-	-	□
May	□	□	-	-
June	□	-	□	-
July	□	-	-	□
August	-	□	□	-
September	-	□	-	□
October	-	-	□	□
November	□	□	□	-
December	□	□	-	□

1. The product and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date.

2. The information in this datasheet is intended to illustrate the operation and characteristics of our products. We neither make warranties or representations with respect to the accuracy or completeness of the information contained in this datasheet nor grant any license to any intellectual property rights of ours or any third party concerning with the information in this datasheet.

3. Applicable export control laws and regulations should be complied and the procedures required by such laws and regulations should also be followed, when the product or any information contained in this datasheet is exported.

4. The product is neither intended nor warranted for use in equipment of systems which require extremely high levels of quality and/or reliability and/or a malfunction or failure which may cause loss of human life, bodily injury, serious property damage including but not limited to devices or equipment used in 1) nuclear facilities, 2) aerospace industry, 3) medical facilities, 4) automobile industry and other transportation industry and 5) safety devices and safety equipment to control combustions and explosions. Do not use the product for the above use unless agreed by us in writing in advance.

5. Although we make continuous efforts to improve the quality and reliability of our products; nevertheless Semiconductors are likely to fail with a certain probability. So in order to prevent personal injury and/or property damage resulting from such failure, customers are required to incorporate adequate safety measures in their designs, such as system fail safes, redundancy and fire prevention features.

6. Our products are not designed to be Radiation-resistant.

7. Please use the product listed in this datasheet within the specified ranges.

8. We assume no responsibility for damage or loss due to abnormal use.

9. All rights reserved. No part of this datasheet may be copied or reproduced unless agreed by Torex Semiconductor Ltd in writing in advance.

TOREX SEMICONDUCTOR LTD.