







3 PIN




4 PIN



5 PIN



6 PIN



7 PIN

STANDARD SERIES

INSERT SCREW - STAINLESS STEEL
FLEX SCREW - STEEL, NICKEL PLATED
HOUSING - ZINC, NICKEL PLATED
SHELL - STAINLESS STEEL
LATCH BUTTON - ZINC, NICKEL PLATED
LATCH SPRING - STAINLESS STEEL
CONTACTOR - BERYLLIUM COPPER, NICKEL PLATE
TUBULAR INSULATOR - MYLAR
SOLDER TERMINAL - BRASS, ELECTRO TIN
FLEX RELIEF - HI-FAX, BLACK - STANDARD (X)
CLAMP PLATE - STAINLESS STEEL
INSULATORS - POLYESTER, GREEN
CONTACTS - BRASS, SILVER PLATED

- A F
- COLOR OF FLEX RELIEF
BLANK = BLACK
01 = BROWN
02 = RED
03 = ORANGE
04 = YELLOW
05 = GREEN
06 = BLUE
07 = PURPLE
08 = GRAY
09 = WHITE
- CONTACT PLATING
BLANK = SILVER (STANDARD)
AU = GOLD
- HOUSING FINISH (SEE NOTE 2)
BLANK = NICKEL PLATE (STANDARD) (X)
BX = BLACK CHROME (Y)
- LATCH TYPE
BLANK = STANDARD LATCHLOCK
D = FAS-DIS-CONNECT DETENT (SEE FIGURE 3)
- FLEX RELIEF SIZE
BLANK = STANDARD SIZE (0.210 TO 0.300)
L = LARGE CABLES (0.300 TO 0.328)
S = SMALL CABLES (0.105 TO 0.205)
- NO. OF CONTACTS:
3 = 3 CONTACTS
4 = 4 CONTACTS
5 = 5 CONTACTS
6 = 6 CONTACTS
7 = 7 CONTACTS

PROFESSIONAL SERIES

SAME AS ABOVE EXCEPT
CONTACT PIN - PHOSPHOR BRONZE, GOLD OVER NICKEL
HOUSING - NON REFLECTIVE VEL-TONE FINISH
FLEX RELIEF - GRAY

- OGP 22
- NO. OF CONTACTS:
3 = 3 CONTACTS

NOTE:

1. ALL DIMENSIONS REF. UNLESS OTHERWISE SPECIFIED.
- (X) 2. BLACK HOUSING AND INSERT WITH SATIN NICKEL PLATED LATCH.
- (X) 3. THIS PRODUCT IS RoHS COMPLIANT.



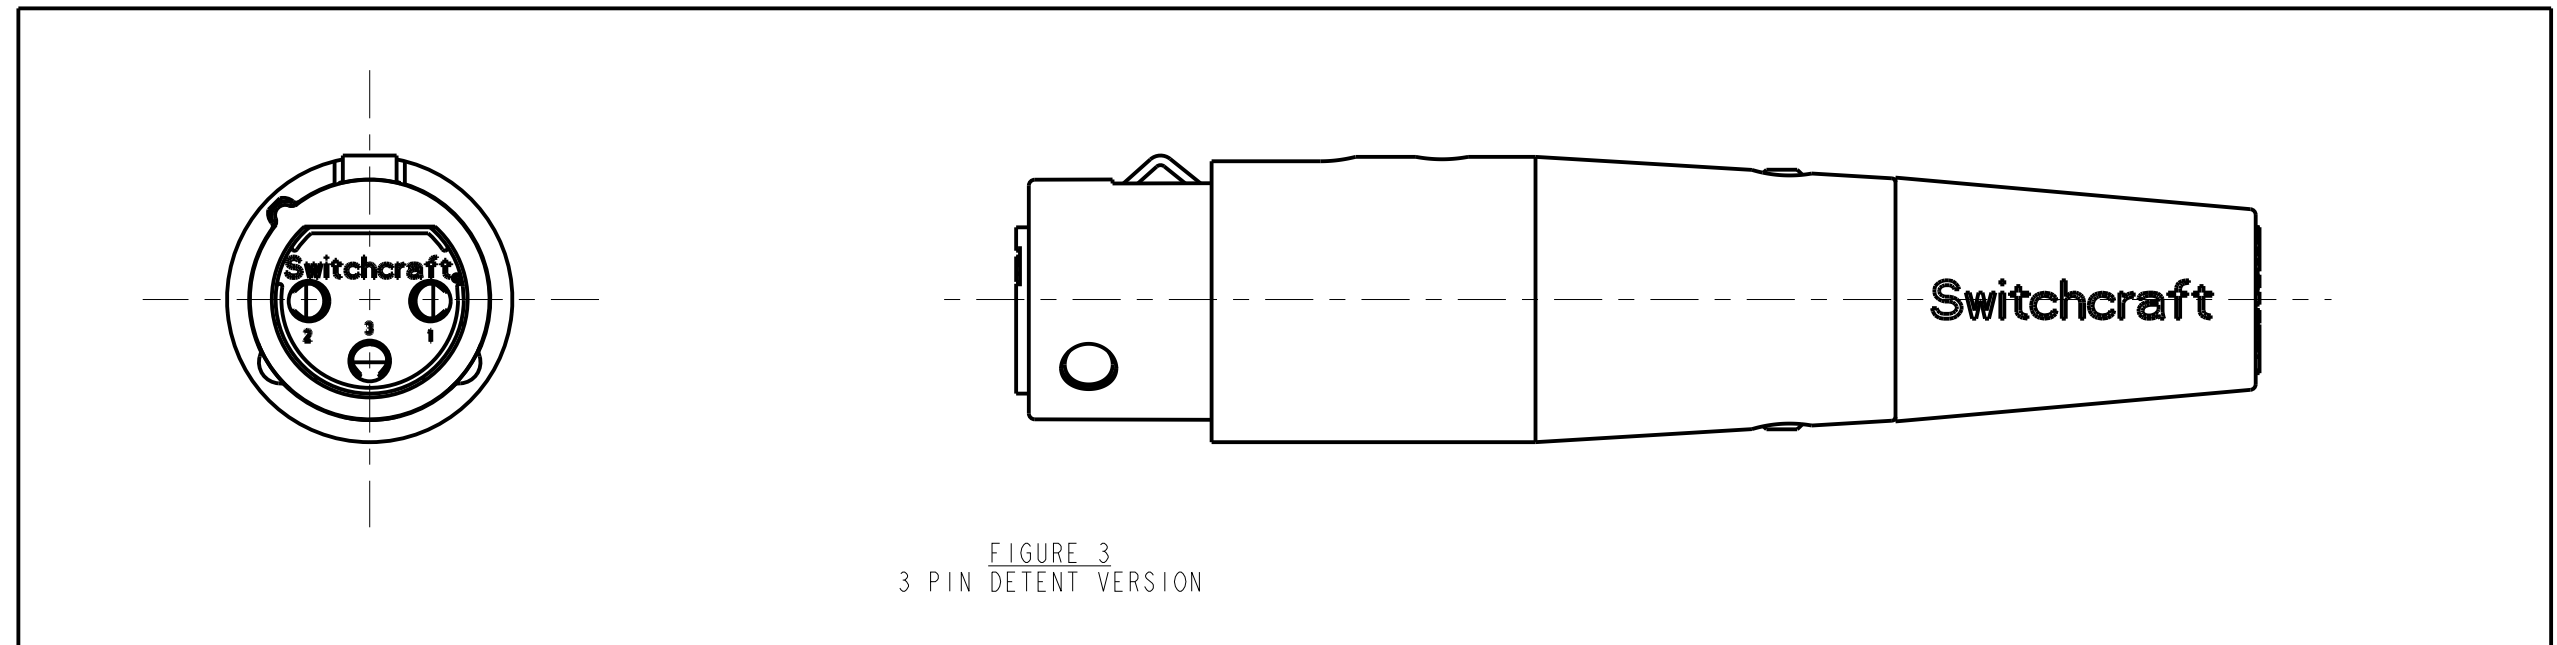


FIGURE 3
3 PIN DETENT VERSION

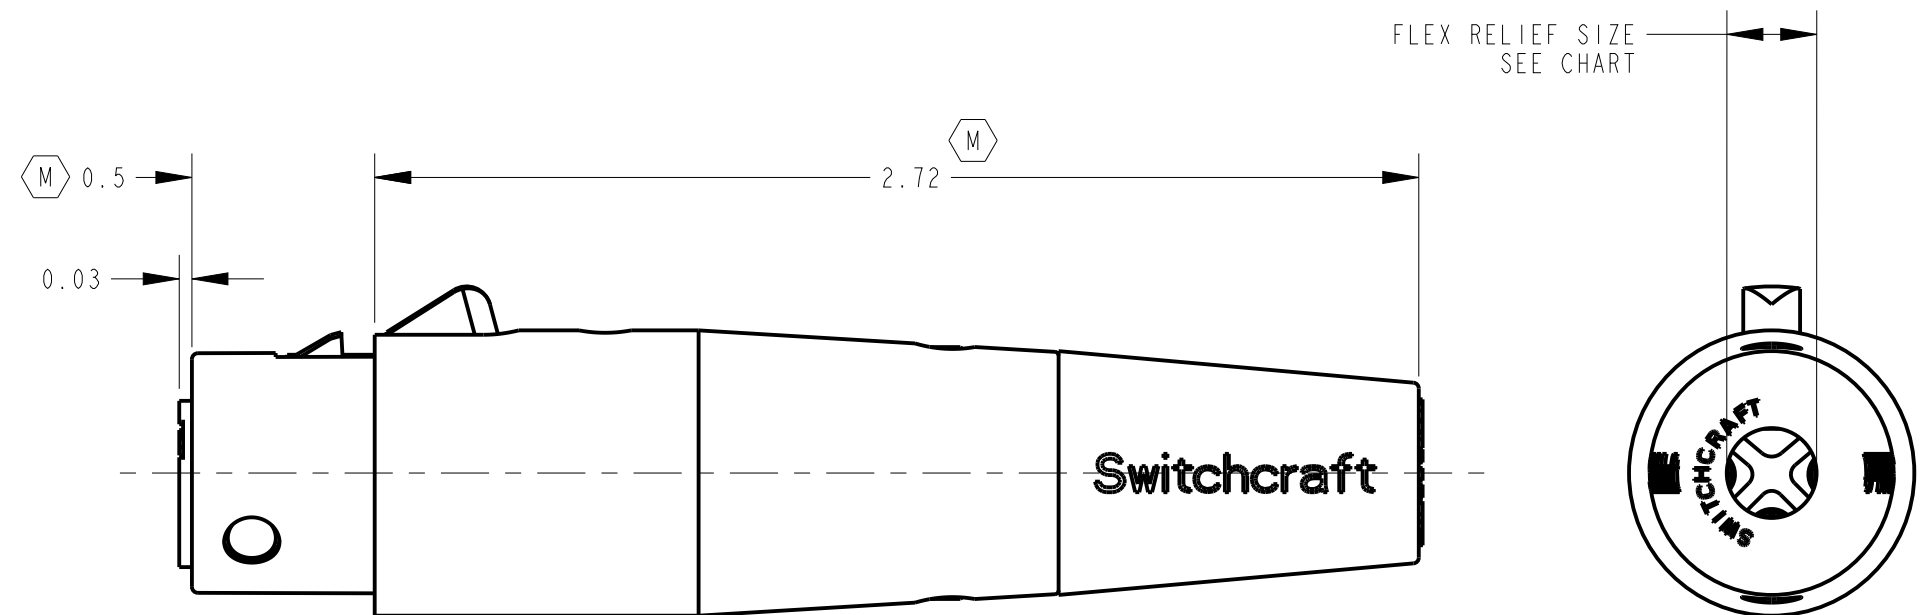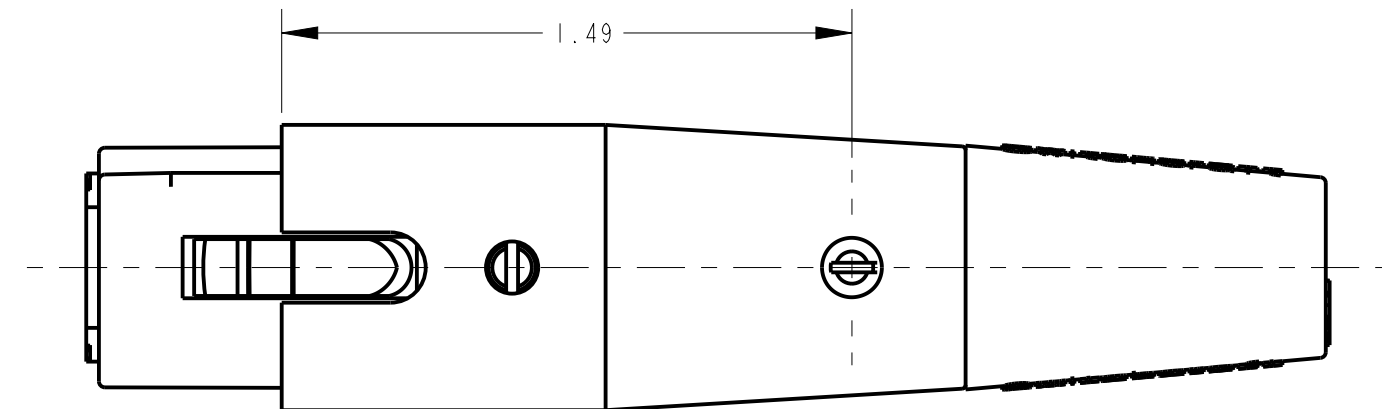

FLEX RELIEF SIZE
SEE CHART

CUSTOMER DRAWING

						★ STAR SYMBOL DENOTES CRITICAL DIMENSION	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.													
						UNLESS OTHERWISE SPECIFIED	SIZE	WIDTH			MULT	LBS/M			TEMPER					
						1. ALL DIMENSIONS IN INCHES - TWO PLACE DECIMALS ±0.01 - THREE PLACE DECIMALS ±0.005 - ANGLES ±1° - ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R.	FINISH SPEC No.					MATERIAL SPEC No.								
Y	28764	08-27-25	PC	TJK			FIRST USED ON				SCALE 2:1		Switchcraft®							
X	26158	10-17-07	TJK	TJK			DATE DRAWN 10-26-93	BY SG	CHKD SG 1-19-95	APVD GHJ 1-19-95										
W	ECO #22530	12-21-98	MM	EB		2. FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±0.002	NAME										PART No.		REV	
V	22353	6-12-98	DA	EB		3. REMOVE ALL BURRS	"A" SERIES FEMALE OG, RoHS										A_F_SERIES		Y	
REV	ECO NUMBER	DATE	BY	APVD		DO NOT SCALE DRAWING														
REVISIONS																				