
2018.11.16 15:10:20 +08'00'


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/18	


APPROVED: _____


DATE: _____ TITLE: _____

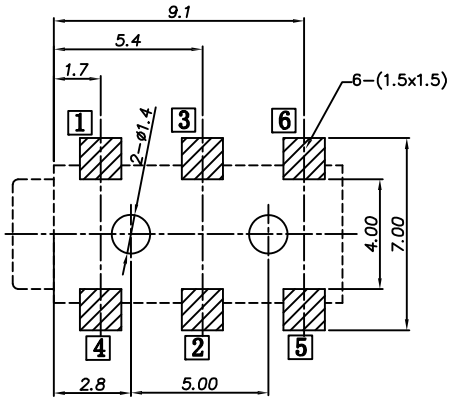


RECOMMENDED PCB LAYOUT
(COPPER SIVE VIEW)

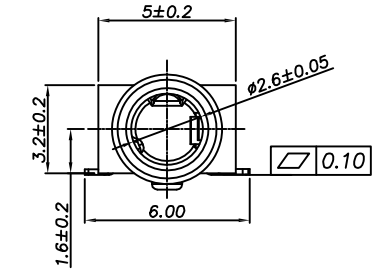





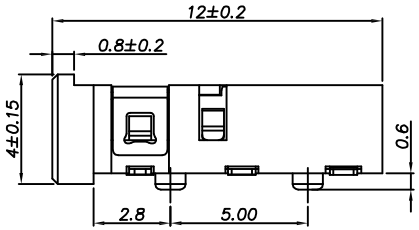


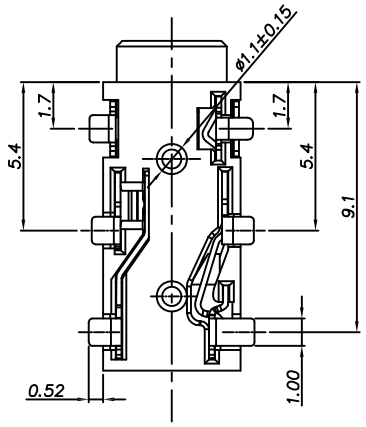

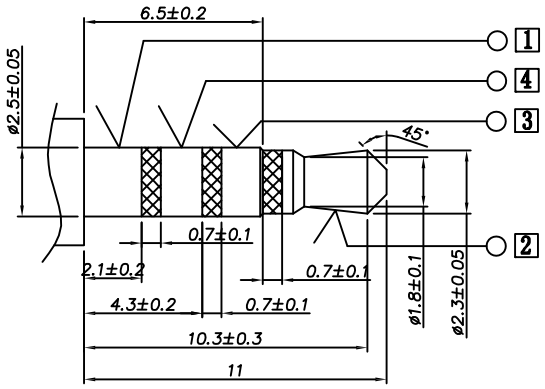

MATE PLUG

PACKAGED ON TAPE & REEL

Model No.	ASJ-145L-I-T/R	ASJ-145L-J-T/R	ASJ-145L-M-T/R	ASJ-145L-A-T/R	ASJ-145L-D-T/R
Schematic code					

SPECIFICATIONS:
Material:
Insulator: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold flash over Nickel underplate overall
Electrical:
Rating: 30VDC, 0.5A
Contact resistance: 30 mohms max.
Insulation resistance: 100 Mohms min. @ 500 VDC
Dielectric withstanding voltage: 500 VAC
Temperature Rating:
Operating temperature: -20°C to +70°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

MM	ANGLE
.X ± 0.50	X ± 5°
.XX ± 0.30	.X ± 3°
.XXX ± 0.15	.XX ± 2°

APPROVALS		DATE
DRAWN	HR	11/16/18
CHECKED	AC1	11/16/18
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: STEREO PHONE JACK, 2.5mm

SIZE	PART NO.	REV.
X	ASJ-145L-X-T/R	-

REF: S00002C | SCALE: NTS | SHEET 1 OF 1