
APPROVED: _____

DATE: _____ TITLE: _____

| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 9/30/17 | |
| A | | UPDATE DRAWING | 3/17/20 | LH/MY |

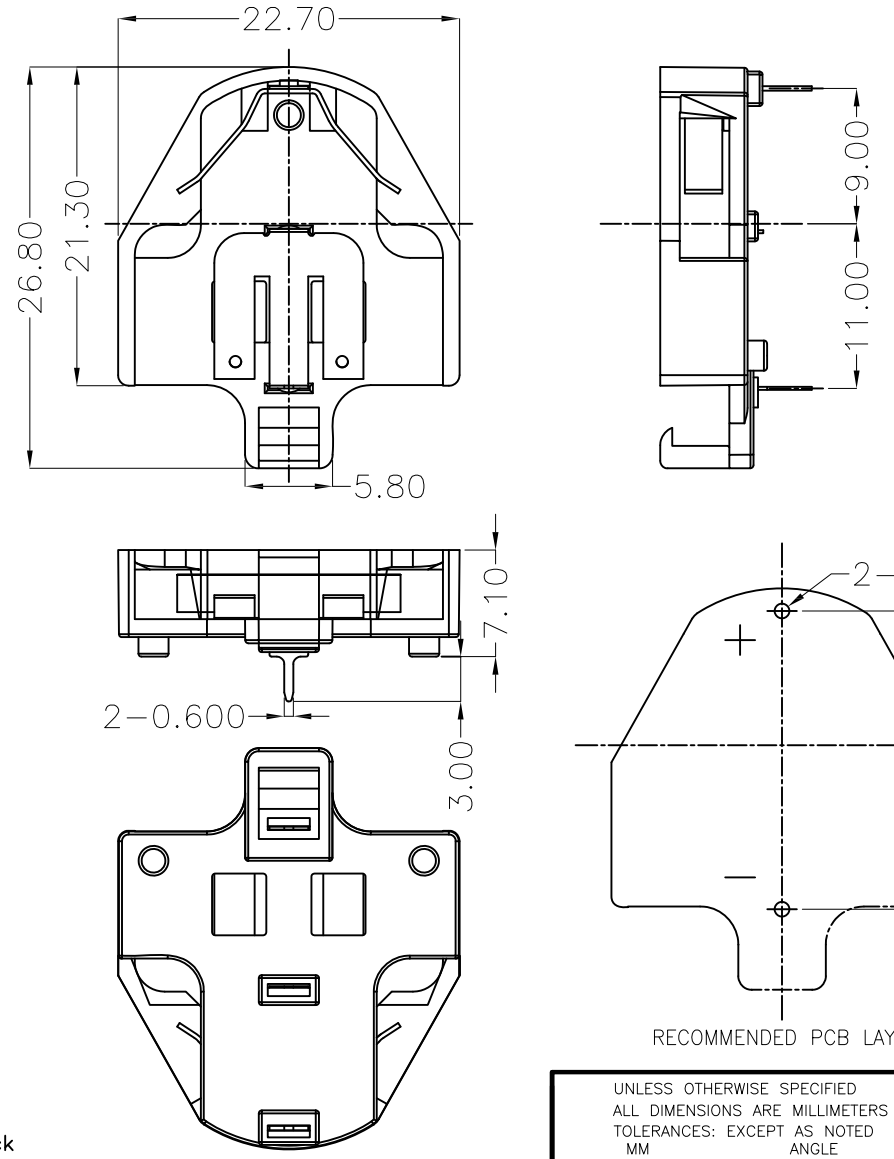


SPECIFICATIONS:
Material:
Housing: PA66, rated UL94V−0, Color: Black
Contact: Phosphor Bronze, Tin plated
Electrical:
Contact resistance: 30 Milliohms max
Insulation resistance: 1,000 Megaohms ohms min
Dielectric Voltage: 500 VAC @ sea level
Temperature Rating:
Operating temperature: −25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

| MM | | ANGLE | |
|---|---|---|---|
| X | ± 0.30 | X | ± 1° |
| X.X | ± 0.25 | X.X | ± 0.5° |
| X.XX | ± 0.20 | | |
| X.XXX | ± 0.10 | | |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | AY | 9/30/17 |
| CHECKED | RC | 9/30/17 |
| APPROVED | | |


ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710


TITLE
COIN CELL BATTERY HOLDER FOR CELL CR2032, DIP TYPE

| SIZE | PART NO. | REV. |
|---|---|---|
| X | BH-100A-1 | A |

| REF: | SCALE: | SHEET |
|---|---|---|
| S00136C | NTS | 1 OF 1 |