

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/11/17	
A		UPDATE DRAWING	4/24/20	OW/EY

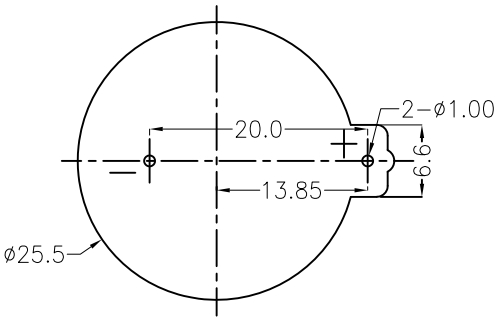

RECOMMENDED P.C.B LAYOUT

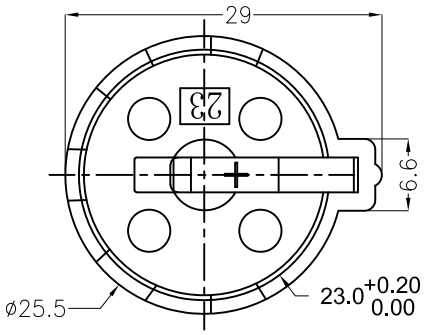

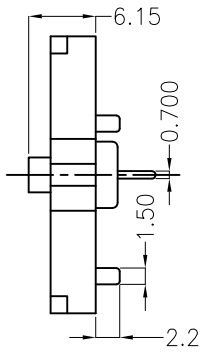

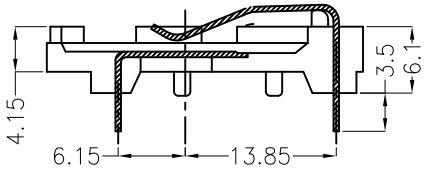

SPECIFICATIONS:
Material:
Insulator: PBT, Glass Fibre rated UL 94V–0
Insulator color: Black
Contacts: Brass, Tin plated
Electrical:
Contact resistance: 30 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric voltage: 500 VAC on Sec level
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

MM		ANGLES	
X	± 0.30	X	±1°
X.X	± 0.25	X.X	±0.5°
X.XX	± 0.20		
X.XXX	± 0.10		

APPROVALS		DATE
DRAWN	AY	1/11/17
CHECKED	CH	1/11/17
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
BATTERY HOLDER, PCB TERMINALS
FOR ONE "COIN" CELL, CR 2330

SIZE	PART NO.	REV.
X	BH-35A-1	A

REF:	SCALE:	SHEET
S00136C	NTS	1 OF 1