


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/28/15	
A		UPDATED DRAWING	8/11/16	AY/LW

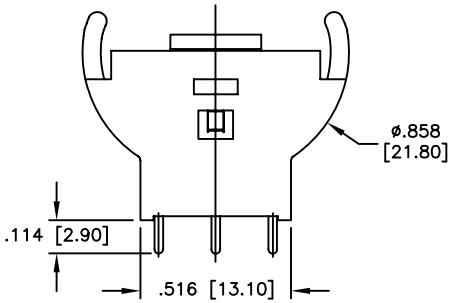




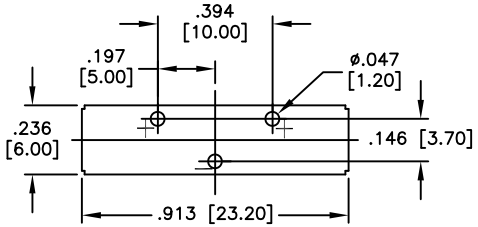

RECOMMENDED PCB LAYOUT

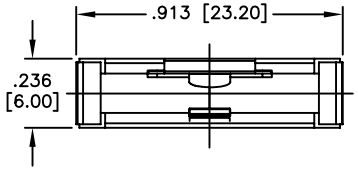

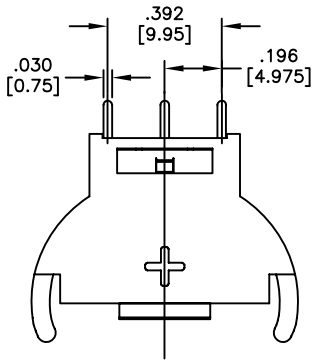

SPECIFICATIONS:

Material:

Housing: PA66, rated UL94V–0, Color: Black

Contact: Phosphor Bronze, Nickel plated

Electrical:

Contact resistance: 30 Milliohms max

Insulation resistance: 1,000 Mega ohms min

Dielectric Voltage: 500 VAC one sec level

Temperature Rating:

Operating temperature: –25°C to +85°C.

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	5/28/15
CHECKED	OC	5/28/15
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE: COIN CELL BATTERY HOLDER FOR ONE CELL CR2032

SIZE	PART NO.	REV.
X	BH-50B-1	-

REF:	SCALE:	SHEET
S00136C	NTS	1 OF 1