Bussmann series STD Offset bolted tags



Product description

Eaton's Bussmann series STD fuse links are specifically designed for street lighting applications with Q1 fusing purpose.

Standard features

- Good peak let-through current limitation
- 1:1:6 Selective coordination ratio between "minor" and "major" fuse
- gG characteristics for cable protection and general purpose applications
- Power loss values well within the limits of IEC 60269

Catalogue symbol:

- STD(Amps)

Technical data:

- Rated voltage: 240 V a.c.
- Rated current: 2 to 32 A
- Breaking capacity: 33 kA
- Class of operation: gG

Standards/approvals:

- BS88 part 1 and 2
- IEC 60269 part 1
- RoHS compliant


Packaging:

- MOQ 20

Table 1. Technical data


Part number	Rated voltage	Rated current (Amps)	Energy integrals I^2t (A^2S)		Watts loss
			Pre-arcing	Total at 415V	W
STD2	240 V a.c.	2	0.8	1	0.5
STD4	240 V a.c.	4	5.5	8	1
STD6	240 V a.c.	6	15	22	1.6
STD10	240 V a.c.	10	28	42	1.2
STD16	240 V a.c.	16	160	250	1.5
STD20	240 V a.c.	20	290	450	1.7
STD25	240 V a.c.	25	800	1300	1.8
STD32	240 V a.c.	32	1600	2500	2.4

Dimensions - mm

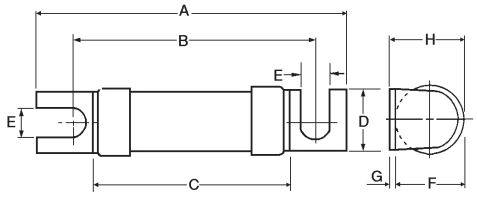

Catalogue numbers	A	B	C	D	E	F	G	H
STD	47	35	24	11	4.7	12	0.8	13

Time current curve

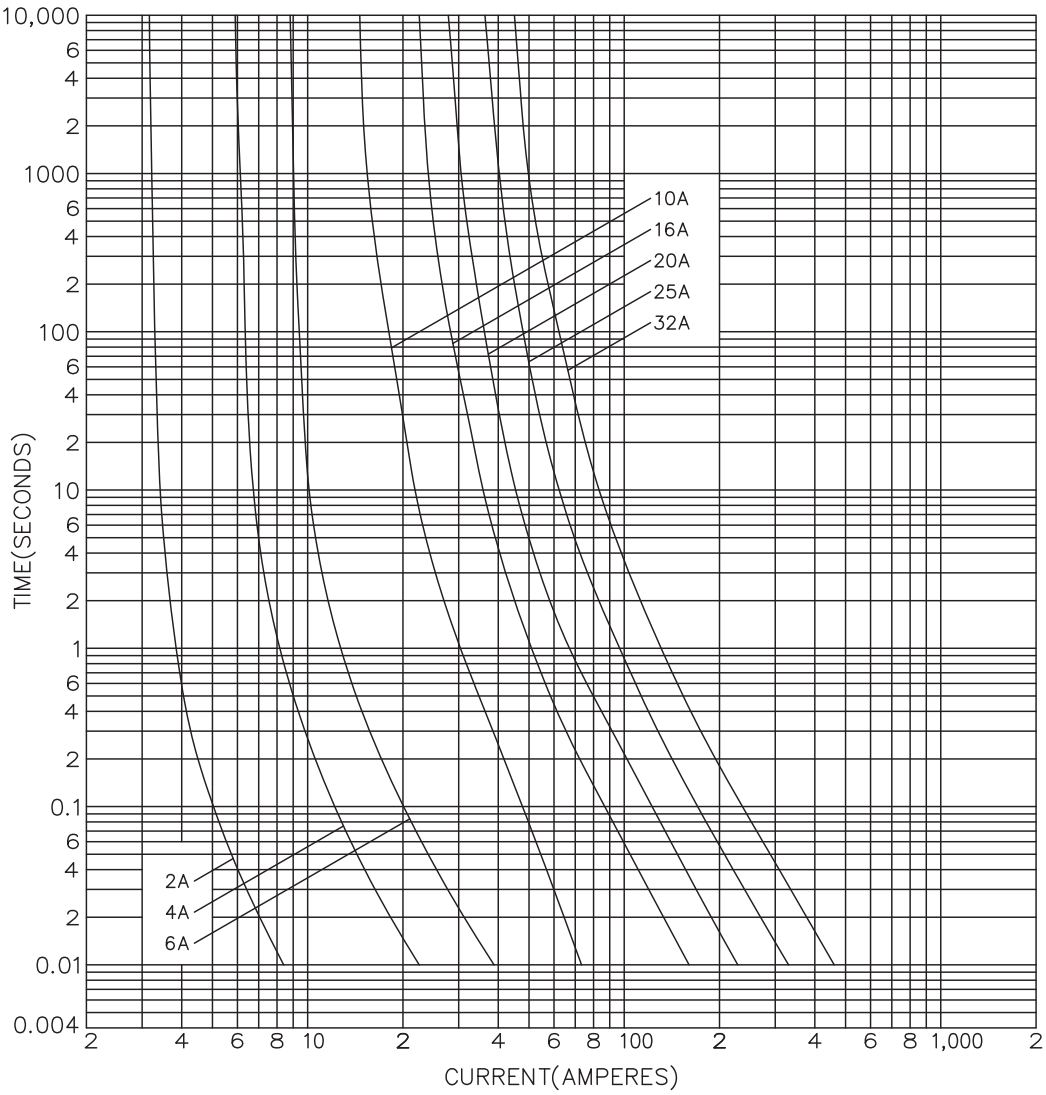

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton
EMEA Headquarters
Route de la Longeraie 7
1110 Morges, Switzerland
Eaton.eu

© 2015 Eaton
All Rights Reserved
Publication No. 4123
July 2015

Powering Business Worldwide

Eaton is a registered trademark.

All other trademarks are property of their respective owners.