



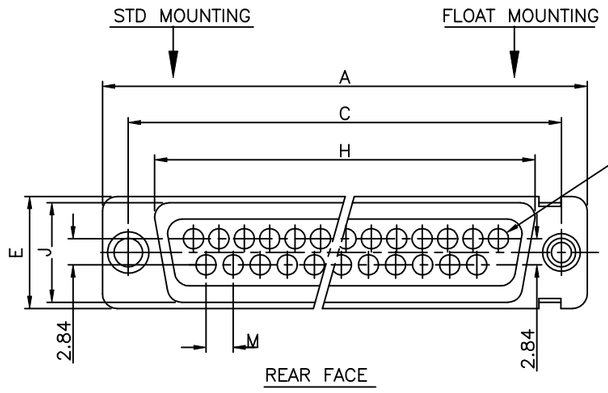





LAYOUT OF 50 POS.CONNECTOR

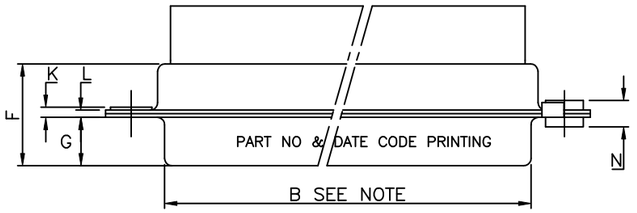






WITH FEMALE SCREW LOCK

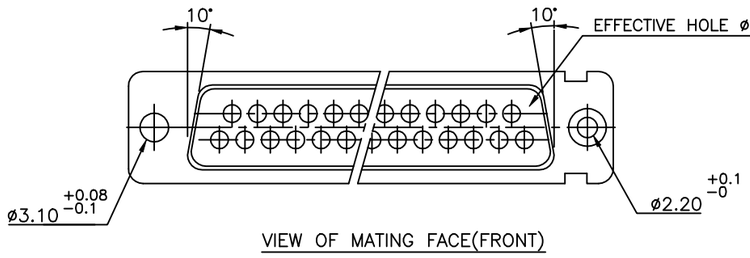


VIEW OF MATING FACE(FRONT)

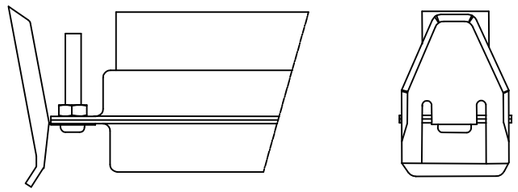


WITH LATCH BRACKET

PANNEL CUTOUTS

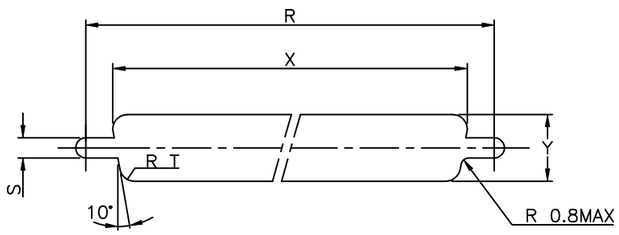

CUT–OUT FOR MOUNTING FROM REAR OR FRONT OF PANEL

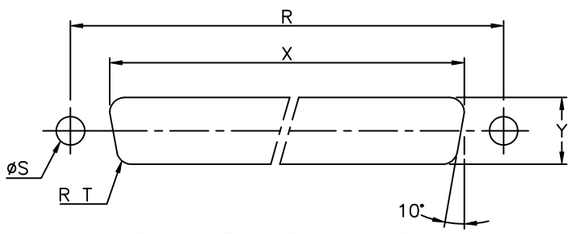

CUT–OUT FOR MOUNTING FROM REAR OF PANEL ONLY
SEE TABLE 2

"This LF product meets European Union Directives and other country regulations as described in GS–22–008"

Packaging as per GS–14–920

SHELL SIZE	TYPE OF MOUNTING	MOUNTING POSITIONS	X±0.1	Y±0.1	R±0.1	S +0.1 −0	T±0.1
			DIMENSIONS				
50	STD	FRONT	58.30	15.80	61.11	3.20	2.10
		REAR	56.30	14.10	61.11	3.20	3.30
	FLOAT	FRONT	59.20	16.60	61.11	2.20	2.10
		REAR	57.20	14.40	61.11	2.20	3.30
37	STD	FRONT	60.70	13.00	63.50	3.20	2.10
		REAR	59.10	11.40	63.50	3.20	3.30
	FLOAT	FRONT	61.50	13.80	63.50	2.20	2.10
		REAR	59.80	12.20	63.50	2.20	3.30
25	STD	FRONT	44.30	13.00	47.04	3.20	2.10
		REAR	42.50	11.40	47.04	3.20	3.30
	FLOAT	FRONT	45.10	13.80	47.04	2.20	2.10
		REAR	43.30	12.20	47.04	2.20	3.30
15	STD	FRONT	30.50	13.00	33.32	3.20	2.10
		REAR	28.80	11.40	33.32	2.20	3.30
	FLOAT	FRONT	31.30	13.80	33.32	2.20	2.10
		REAR	29.60	12.20	33.32	2.20	3.30
09	STD	FRONT	22.20	13.00	24.99	3.20	2.10
		REAR	20.50	11.40	24.99	3.20	3.30
	FLOAT	FRONT	23.00	13.80	24.99	2.20	2.10
		REAR	21.30	12.20	24.99	2.20	3.30

TABLE 2

SHELL SIZE		+0.76 A–0	+0.25 B–0	+0.12 C–0	+0.25 D–0	+0.76 E–0	F MAX	+0.15 G–0	+0.51 H–0	+0.51 J–0	K±0.20	+0.22 L–0	M±0.06	NMAX	PMAX
50	P	66.65	52.68	61.11	11.08	14.99	11.09	5.85	55.07	13.31	1.50	1.0	2.76	3.05	17.35
	S	66.65	52.30	61.11	10.62	14.99	11.21	6.05	55.07	13.31	1.10	0.8	2.76	2.85	17.44
37	P	68.94	55.30	63.50	8.23	12.17	11.09	5.85	57.45	10.46	1.50	1.0	2.76	3.05	17.35
	S	68.94	54.71	63.50	7.77	12.17	11.21	6.05	57.45	10.46	1.10	0.8	2.76	2.85	17.44
25	P	52.65	38.84	47.04	8.23	12.17	11.07	5.85	41.02	10.46	1.10	0.8	2.76	2.85	17.35
	S	52.65	38.25	47.04	7.77	12.17	11.21	6.05	41.02	10.46	1.10	0.8	2.76	2.85	17.44
15	P	38.76	25.12	33.32	8.23	12.17	10.99	5.85	27.25	10.46	1.10	0.8	2.74	2.85	17.35
	S	38.76	24.54	33.32	7.77	12.17	11.21	6.05	27.25	10.46	1.10	0.8	2.74	2.85	17.44
09	P	30.43	16.79	24.99	8.23	12.17	10.99	5.85	19.02	10.46	1.10	0.8	2.74	2.85	17.35
	S	30.43	16.21	24.99	7.77	12.17	11.21	6.05	19.02	10.46	1.10	0.8	2.74	2.85	17.44

NOTE:–INSIDE DIM. OF MALE AND OUTSIDE DIM. OF THE FEMALE CONNECTOR.

ORDERING INFORMATION

8656 O 25 P L X T X XXX LF

- SERIES
- OPTIONS–1
  - BLANK–STANDARD MOUNTING
  - O–CLINCH NUT (UNC)
  - L–CLINCH NUT (M3)
  - U–FEM. SCREW LOCK HEX. (M2.6)
  - V–FEM. SCREW LOCK HEX. (UNC)
  - F–FLOAT MOUNTING
  - K–LATCH BRACKET
- NO.OF CONTACTS
  - 09,15,25,37,50
- CONTACTS
  - P – PIN
  - S – SOCKET
- LF – LEAD FREE
- SPECIAL CODES
- DIMPLES
  - X–ON MALE CONNECTORS ONLY
- SHELL PLATING
  - BLANK–ZINC PLTG.
  - T–STD. TIN/Zinc Cr3 PLTG.
- OPTIONS–2
  - BLANK–STD. W/O ACCESSORIES
- OPTIONAL
  - L–SUPPLIED W/O CONTACTS (OBLIGATORY)

TECHNICAL SPECIFICATIONS

SHELLS	:	TIN/CADMIUM/ZINC PLATED STEEL
INSULATOR MATERIAL	:	SELF EXTINGUISHING THERMOPLASTIC–TO UL CLASS 94 V0
		THE HOUSING WILL WITHSTAND EXPOSURE TO 260–265°C
		IF WE USE PROTECTIVE ADHESIVE (type Kapton or Teflon)
		OR PROTECTIVE METALLIC DEVICE
CONTACTS DIA ON ACTIVE AREA	:	ø1 MM.
CONTACTS MATERIAL	:	COPPER ALLOY
CONTACT PLATING	:	GOLD / GXT OVER NICKEL (ACTIVE ZONE)
	:	TIN OVER NICKEL (TERMINATION ZONE)
FOR LEAD FREE PLATING	:	2 µ MIN.MATTE TIN TOP OVER 1.27 µ MIN.NICKEL UNDER PLATE(ON TERMINATION ZONE)
OPERATING TEMPERATURE	:	–55°C TO +125°C
OPERATING CURRENT	:	5 A PER CONTACT
CONTACT RESISTANCE	:	⩽10mΩ
INSULATION RESISTANCE	:	>5000 MΩ IN AMBIENT CONDITIONS.
MAXIMUM VOLTAGE	:	1000 V.r.m.s
MECHANICAL ENDURANCE	:	200 MATINGS (CODE 64)
DAMP HEAT	:	21 DAYS
WIRE SIZE	:	AWG 20/24 OR AWG 24/28
CONTACTS	:	CRIMP REMOVABLE
MAX DIA OF WIRE	:	1.52mm (AWG 20/24) 1.02mm (AWG 24/28)

ltr	ecn no	dr	date
E	i06–0074	GVJ	2006/06/08
F	i11–0003	AMR	2011–01–06
F1.1	–	PK	2012/05/29
G	ELX–I–01185	PK	2012/06/01
H	ELX–I–43803	ACJ	2022/01/11

mat'l. code

surface ISO 1302 √ | tolerance ISO 406 ISO 1101

tolerances unless otherwise specified

angles 0°±2° | linear .0±.1, .0±.05, .00±.005

projection | mm | scale 1:1

dr	MINI KV	1999/03/20
engr	ARUN CJ	2022/01/11
chr	GREGAR M	2022/01/11
appd	SANOJ PK	2022/01/11

sheet index | revision H | sheet 1

product family: D–SUB

title: D–SUB CRIMP CONNECTOR

dwg no C–DSUB–0071 | sheet 1 of 1 | size A3

type Product Customer Drawing

© 2016 AFCI