


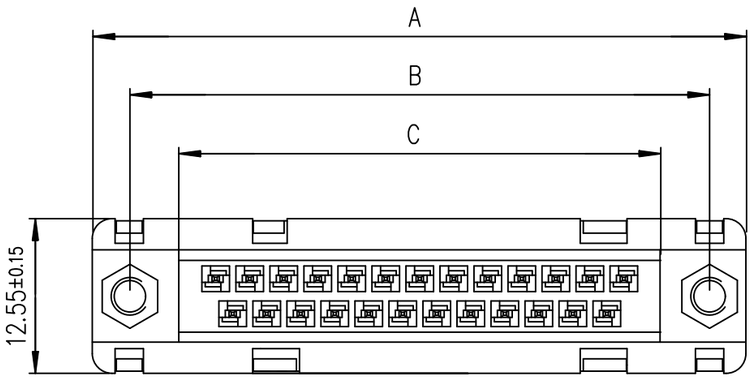


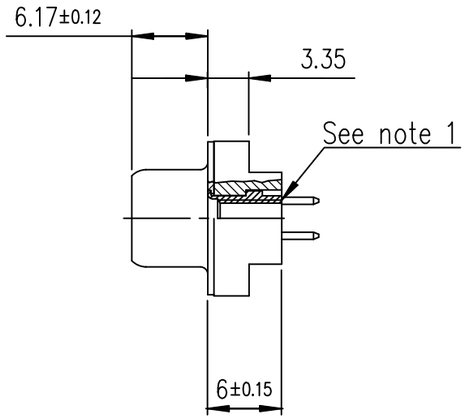


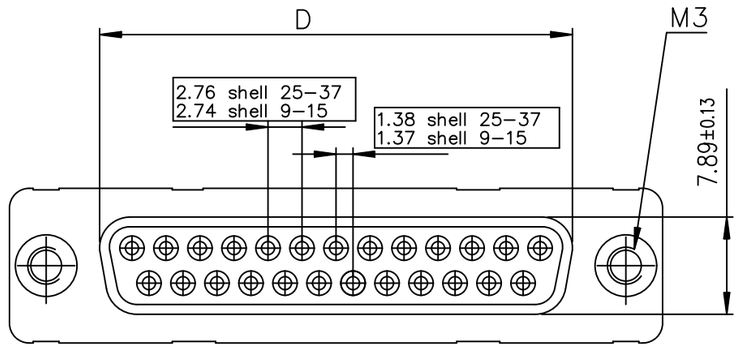

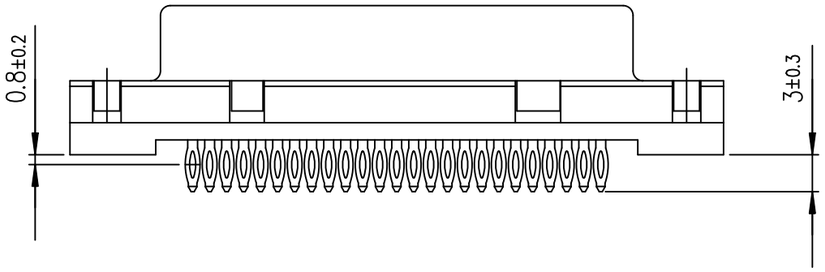

PC board drilling dimensions(after plating)

(thickness ≤ 3.20±0.30mm)

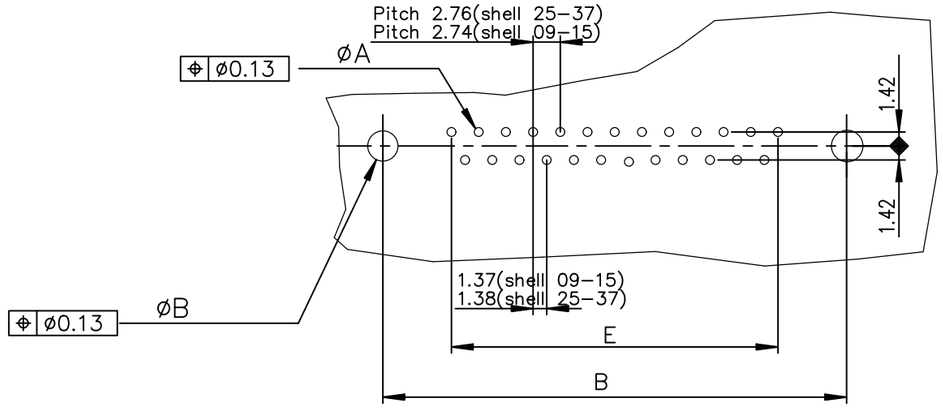

Notes:

1) The nut can protrude above the surface of insulator but maintaining the footprint dimension 6.0±0.15 mm.

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25 0	E±0.07	PART NUMBER	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S91C4PL00LF	D09S91C6PL00LF	D09S91C8PL00LF
15	39.14	33.32	25.18	24.54	19.18	D15S91C4PL00LF	D15S91C6PL00LF	D15S91C8PL00LF
25	53.03	47.04	39.12	38.25	33.12	D25S91C4PL00LF	D25S91C6PL00LF	D25S91C8PL00LF
37	69.32	63.50	55.68	54.71	49.68	D37S91C4PL00LF	D37S91C6PL00LF	D37S91C8PL00LF
						200 MATING CYCLES	500 MATING CYCLES	500 MATING CYCLES (1.25µ gold)

ltr	ecn no	dr	date
K	ELX-I-21256	AB	2015-07-14
L	ELX-I-59402	GM	2026-02-13

mat'l. code	–	
surface	ISO 1302	
tolerance	ISO 406 ISO 1101	
tolerances unless otherwise specified		
angles	0°±2°	
linear	.0±.0.3	
	.00±0.10	
	.000±0.05	
projection		
	MM	
scale	2:1	
dr	JOUBERT	1995-03-24
engr	GREGAR M	2026-02-13
chr	GREGAR M	2026-02-13
appd	ALEX BABU	2026-02-13
product family	D-SUB	
title	FEMALE CONNECTOR DELTA-D STRAIGHT PRESS FIT	
dwg no	C01-8646-0128	
sheet	1 of 1	
size	A3	
type	Product Customer Drawing	
sheet index	revision L, sheet 1	

© 2016 AFCI