
MODEL NO.	PACKAGING
134-1000-008	ONE PCS PER BAG

REV	ECO	DATE
001	ECO-17-0032	11/28/2017
002	ECO-18-0020	08/21/2018

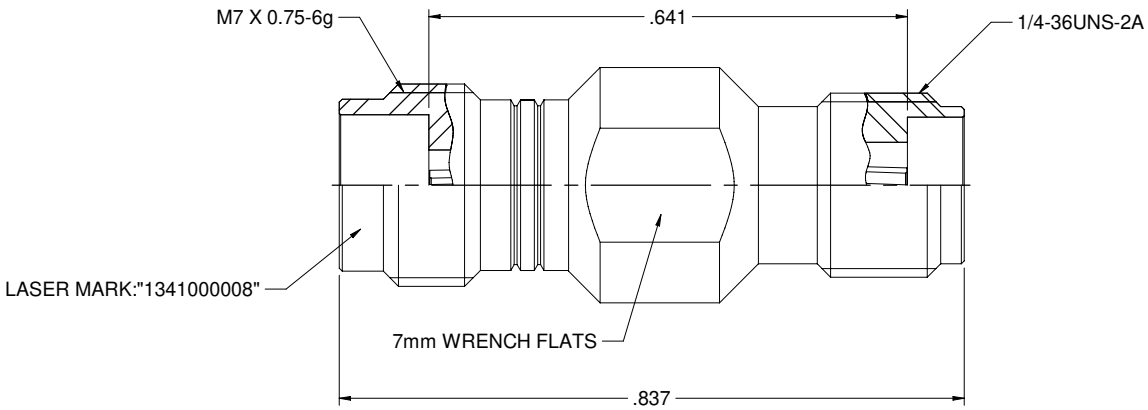

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL & FINISH:
   1.1 BODY: PASSIVATED STAINLESS STEEL
   1.2 CONTACT PIN : GOLD PLATED BERYLLIUM COPPER
   1.3 INSULATOR: ULTEM 1000 AMBER

2. ELECTRICAL:
   2.1 IMPEDANCE: 50 OHMS
   2.2 FREQUENCY RANGE: DC-46 GHz
   2.3 INSERTION LOSS: 0.3DB MAX
   2.4 DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS MIN
   2.5 VOLTAGE STANDING WAVE RATIO: DC- 4 GHZ: 1.05 MAX
   4 -20 GHZ: 1.08 MAX
   20-46 GHZ: 1.15 MAX
   2.6 CONTACT RESISTANCE: CENTER CONTACT: 4 MILLIOHMS MAX
   OUTER CONTACT: 2.5 MILLIOHMS MAX
   2.7 INSULATION RESISTANCE: 5000 MOHM MIN

3. MECHANICAL:
   3.1 ENGAGEMENT/ DISENGAGEMENT FORCE: 0.23 NM MAX
   3.2 CONTACT RETENTION: 20 N MIN
   3.3 DURABILITY: 500 CYCLES MIN

4. ENVIRONMENT:
   4.1 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B.
   4.2 OPERATING TEMPERATURE: -65 TO 165°C
   4.3 SHOCK: MIL-STD-202, METHOD 213, CONDITION I
   4.4 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
   4.5 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

This PROPRIETARY Document is property of Cinch Connectivity Solutions, Inc. and contains confidential and trade secret information. By accepting or understanding that it is not permitted to copy or disclose all or any portion of this Document and that you shall return it upon request. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.

Model No. 134-1000-008
RoHS2 2011/65/EU
Cage Code
3RD ANGLE PROJECTION
UNLESS OTHERWISE SPECIFIED UNITS: INCH
.XXX ±.02
.XXXX ±.01
ANGLES ±5°
Drawn by: Betty.Yu
Date: 08/21/2018

Johnson

Title: ADAPTER ASSEMBLY, 2.4mm JACK TO 2.92mm(SMK) JACK

Drawing No. 134-1000-008 Rev. 002

Size C | DO NOT SCALE DRAWING | Workmanship Std: NONE | Sheet 1 of 1

Please read our datasheet & drawing disclaimer here.