

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	STANDARDIZATION OF PLATING & SPLICING	21AUG2024	GVP	KJK

1 FOR MINI-APPLICATOR CRIMPING

△₂ UNDERCOATING 1.25μm Ni, SELECTIVE
0.8μm Au, NO GOLD FLASH


△₃ UNDERCOATING 1.25μm Ni, SELECTIVE
0.8μm Au, GOLD FLASH ON REMAINDER (GOLD
FLASH IS NOT MANDATORY ON THE PILOTED CARRIER STRIP).

△₄ ZONE I BRIGHT TIN PLATED

△₅ PRE TIN PLATED 2.0μm

6 MATERIAL: PHOS BRONZE


7 SPLICING – MAXIMUM 1 LOOSE END PER
REEL IS ALLOWED.

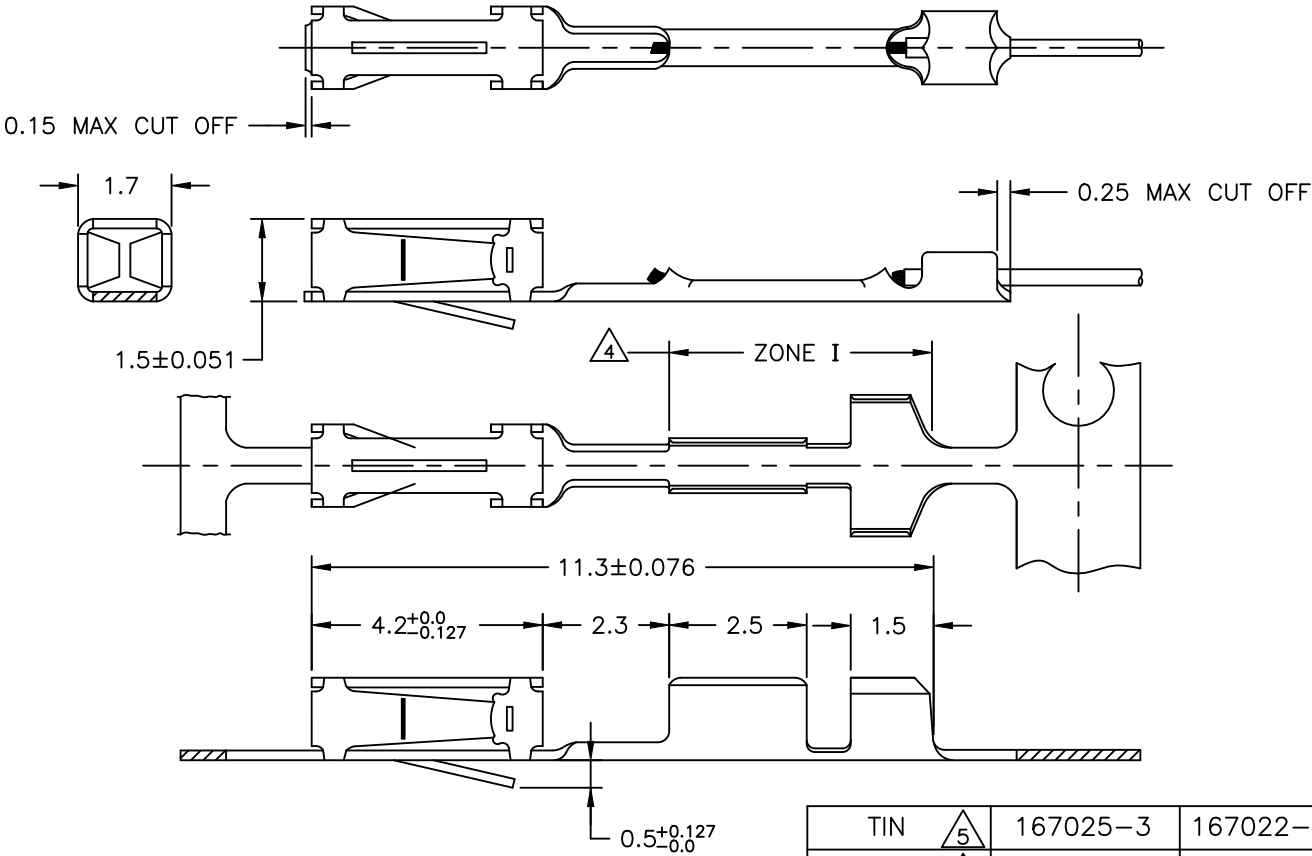

TIN	△ ₅	167025-3	167022-3
GOLD	△ ₃	167025-2	167022-2
GOLD	△ ₄ △ ₂	167025-1	167022-1
PLATING		LOOSE PIECE	ORDER NO

TE Connectivity. All Rights Reserved.

WIRE RANGE: 28-32 AWG 0.03-0.09 mm ²	INSUL. RANGE: .020-.040 0.5-1.02 DIA
---	--

DIMENSIONS:		DWN	15JUN2018		MATERIAL		FINISH	
mm		RAVI S		-		-		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	15JUN2018		TE Connectivity			
		OLSON JOSEPH						
		APVD	15JUN2018					
		OLSON JOSEPH						
		PRODUCT SPEC						
108-25007		NAME AMPMODU MOD V RECEPTACLE						
APPLICATION SPEC								
114-25003		SIZE A4						
WEIGHT								
-		CAGE CODE 00779						
		DRAWING NO C= 167022						
		RESTRICTED TO -						
		CUSTOMER DRAWING						
		SCALE				1:1		
		SHEET				1 OF 1		
		REV				B		